

Application design for a smart watch with a high resolution display

Chandra Narayanaswami, M. T. Raghunath

Wearable Computing Platforms
IBM TJ Watson Research Center
Yorktown Heights, NY 10598
{chandras, mtr}@us.ibm.com

Abstract

Advances in technology have made it possible to package a reasonably powerful processor and memory subsystem coupled with an ultra high-resolution display and wireless communication into a wrist watch. This introduces a set of challenges in the nature of input devices, navigation, applications, power management, and other areas. This paper describes a platform we have developed and the decisions we have made about how to address these challenges.

1 Introduction

A wrist watch is an attractive form factor for a wearable computer. It has the advantage of always being with you; and it can be instantly viewed with the flick of the wrist. By comparison, devices such as pagers, cell phones, and PDAs are typically worn on belts or kept in pockets and need to be picked up and opened first before they can be accessed. One of the reasons for the success of the Palm was its moving to an *instant-on* paradigm. Wristwatches move us to the next step; to an *instantly-viewable* paradigm.

Because people generally keep watches on their wrists, watches are less likely to be misplaced compared to phones and pagers. For example a hip holster is not the best place to keep a cellular phone while sitting in a car and so people tend to keep them in the car seat and forget them when they leave the car in the parking lot.

The watch form factor requires a relatively small screen size, and there is not much room for input devices or batteries. The value of a wristwatch platform depends on finding good solutions to these issues. To interact with the watch, we need both hands since the hand on which the watch is worn is practically useless for controlling input devices on the watch.

Several smart watches are available commercially today. Personal Information Management (PIM) applications are provided on the Seiko Ruputer™ [1], the onHand PC™ [2], the Casio PC-Unite™ [5] and the Timex DataLink™ [4]. These watches pack an impressive amount of function but have low resolution displays. This limits the amount and type of data that can be displayed on their screens. Some of the above have cumbersome/confusing user interfaces with many buttons leading to limited adoption. For example, on the Seiko Ruputer™ it is quite difficult to get back to the clock face from any application. The Casio WMP-1V™ [5] is a wearable MP3 player, the Casio WQV-1™ [5] is a wearable digital camera, with a 120x120 display, the Casio BP 100™ measures blood pressure and the Casio Satellite Navi™ [6] provides GPS on a watch. The Timex Beepwear™ watch has a built in pager. The Swatch Access™ watch [10] has an RF id tag which can be used as a ski pass at some ski resorts. Swatch is also working on a cell phone in a watch called Swatch Talk™. The NTT PHS Personal Handy Phone System [7] and the Samsung Watchphone AnyCall™ [7] are watches with a telephone. Polar produces heart rate monitor watches (Smart Edge™, Beat™, Protrainer NV™, Lady Beat™ Target™, Pacer™).

There is plenty of interest in adding function to watches in the industry. Our interest is not in so much in providing a watch, as in providing an open, extensible computing platform in a small form factor. Our objective is to understand the challenges in packaging, hardware design, power management, and embedded software.

2 Wrist watch computer overview

The *wrist watch computer* is a wearable personal information access and alert notification device with both short range and long range RF wireless connectivity. The initial display for the watch is a 96x120 pixel monochrome LCD display. Subsequently, the display will be enhanced to an ultra high resolution (600 dpi) monochrome display. The applications and user interfaces described in this

paper are targeted to the higher resolution display and were prototyped on a commercially available backlit VGA resolution display.

These display and communication capabilities could make the *wrist watch computer* the preferred viewer for other devices that are around you and for your electronic agents running on web, business or e-commerce servers

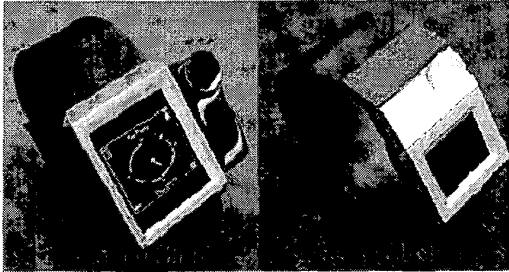


Figure 1: Enhanced Shell and Basic Shell

on the intranet or the internet.

At the core for the *wrist watch computer* is an ARM 7 based low-power system board that runs Linux. The system board uses state of the art technology such as

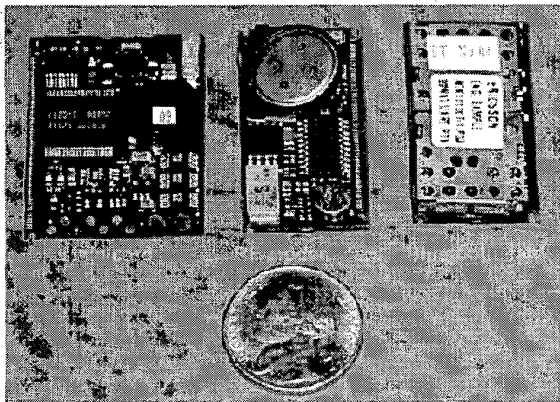


Figure 2: Main card and communication cards

Surface Laminar Circuit™ (SLC). It is 34.7x27.5x3.0mm in size. Additional communication cards are used to support short range wireless protocols such as Bluetooth. Power is supplied by a rechargeable lithium-polymer battery.

Figures 1 and 2 show initial wrist watch computer prototypes.

The watch must be viewed as a companion to some other key devices such as a PC in an office, a cell phone in a bag, or a wireless beacon in a building. So the watch need not do all the functions a user wants but must

communicate and cooperate with other devices so that the strengths of each device can be exploited to the maximum.

3 Selection of input devices

The choice of input mechanisms is critical for ease of use. In our effort to find the right input devices for the wrist watch computer, we first studied the advantages and disadvantages of input devices on a set of commercially available products including the Palm Pilot™, Psion Series 5™, HP Jornada™ and other handheld PDAs, the RexPro 5-DS™, RIM Interactive Pager 960™, Hertz NeverLost™ car navigation system, several digital cameras, remote controls, smart watches, and cell phones. The pros and cons of several choices for input devices are described below:

Keyboards: Though useful for entering large amounts of text, watches do not have the surface area and volume needed for hardware switches such as keyboards. Even if we were able to fit a tiny keypad with a limited number of keys on the wristwatch, it would be difficult to use for most people.

Touch Screen: A touch sensitive screen can be used on the wrist watch computer to provide for soft switches and character input. The relative sizes of a watch face and a human finger limit the number of distinguishable touch zones to four or five, although a stylus could be used on the watch face to accept fine grained input such as graffiti. It was clear to us through experimentation with the Casio VDU 200B™ watch that touch screens frequently showed screens other than the desired time screen due to accidental activation every now and then. Despite this shortcoming we felt that a touch screen would be a good input mechanism to support on a wrist watch since it was more versatile and more elegant compared to buttons. And for usability reasons, we limit the number of distinguishable zones to the four - one for each corner.

Scrolling: A touch screen provides a good selection mechanism but does not perform too well as a scrolling mechanism. For this purpose we considered a rocker switch, a rotating bezel, and a roller switch. The rocker switch rocks up or down. It can be pushed in to select. The roller wheel and the bezel allow complete revolutions to scroll up or down. The roller wheel may be pushed towards the center to select and the bezel may be pressed down to select. Initial user tests revealed that a rocker switch (fitted on a RexPro 5-DS™) was superior to touch screen actions, but a roller or bezel that allowed complete rotations seemed easier to use and more natural. Since our present watch is rectangular, we chose a roller wheel over the rotating bezel.

We positioned the roller wheel to minimize the chance of accidental activation by bending the wrist. The user has to push in the southwest direction to select.

As shown in Figure 1, the wheel is also positioned in the northeast corner to accommodate both left and right handed users. Right handed users anchor their thumb to the bottom left corner of the watch and use their index finger to roll the wheel, moving the index finger north to south or vice versa depending on the desired direction of rotation. Left handed users who wear the watch on their right wrist tend to anchor their thumb in a similar fashion, but move their index finger along the upper boundary of the watch, in an east-west or west-east direction. Therefore placing the wheel at the northeast corner of the watch was desirable.

Alternatively, for left-handed users we could build a mirror-image watch, where the watch could be reversed so that the roller wheel appears in the northwest corner instead of the northeast corner. However, in this case there would be two distinct types of watches: left-handed and right-handed ones.

External I/O: External input/output devices can interact with the watch over wireless standards such as IrDA and Bluetooth. For example, one could bring the watch near a Bluetooth connected keyboard, perhaps a Twiddler™, to enter information into the watch.

Voice recognition: The wrist watch computer includes a microphone and speaker, so that speech based interfaces are possible. We have found that current technology limits extensive use of this concept, although the capability can be improved using a wireless connection to an adjunct device with more computing power that can be used for doing part of the voice recognition.

4 Application and interaction design

The primary applications of a watch are related to time. Watches started with the ability to tell time. Then alarms were added to help people wake up. The next generation of smart watches will extend this concept by allowing people manage their time, provide personal information management (PIM) functions and also save time in their jobs by receiving just in time information on their wrists by leveraging short range wireless connectivity.

Before designing the applications for the watch, we spent a great deal of time trying to simplify the user interface by taking advantage of the high resolution display and the chosen input devices.

We started a study of existing devices which suggested we focus on navigation between functions. After some study, we settled on the following requirements for navigation between screens on the watch:

- i. a quick return to the watch face from any application,
- ii. a time-out to the watch face from any function,
- iii. one touch deactivation of alarms,
- iv. direct access to the main list of applications,
- v. user programmable touch screen areas that could be used to access the user's most important applications,
- vi. user ability to perform most of the common actions without lifting finger off the wheel,
- vii. the ability to easily return to the previous screen. (Our studies indicated that people had become familiar with the browser model and the concepts of following hyperlinks and going back in the browser history stack. Therefore extending the concept of a browser back button to every watch face screen was desirable.)

We wanted the usage of the wrist watch computer to be obvious and avoid the need for a thick user manual for the watch. We started with human computer interaction (HCI) concepts from familiar computing environments such as web browsers, etc., and then employed a user-centered design process to tune the environment.

From our user study, we determined users were typically not aware that the screen was touch sensitive or that the roller could be pushed in to generate a selection. So some documentation to make the users aware of these features was useful.

With the basic input mechanisms on the wrist watch computer, and the four zone limitation we have placed on the touch screen, the following input options are available on the watch.

- i. Press any of the four regions on the touch screen
- ii. Roll the roller wheel clockwise
- iii. Roll the roller wheel counterclockwise
- iv. Push the roller wheel in the SW direction to select

In order to facilitate a quick return to the watch face, we decided to dedicate a touch on the top left corner to go back to watch face, irrespective of what the watch face is currently displaying. There is one exception to this rule however; if the watch face is already displaying the time a top-left tap takes the watch to the main-menu screen.

The top-left zone was chosen for this *return-to-home* function, since a right-handed user's right index finger (who wears his watch on the left hand) will almost completely cover the wrist watch computer display when this zone is being pressed. Obscuring the screen in this fashion is not desirable if the user needs to remember some information on the current screen. However, since a top-left tap results in a complete switch to a well-known screen the user is least concerned with the current contents of the display being obscured in this fashion.

In order to support a consistent page-back mechanism we decided to dedicate the bottom left zone to the *go-back* function - in this case 75% of the screen is visible for the right-handed user.

The two right zones are under the control of the application that currently has control of the screen. The application may decide to use them to go to the next page or previous page, or to invoke a list of menus for a hyperlink or an application, or for other purposes.

For left handed users the conventions of functions mapped to the left and right zones may be reversed in software. This is another advantage that results from the use of a touch screen.

The above conventions are suspended when an alarm sounds. In this case the alarm is quickly silenced by pressing any zone on the watch display.

By asking people we determined that many found it easier to set time on an analog watch using the watch stem than it was to set time on digital clocks with buttons. Since this design is for a high resolution display where the hands of the watch could be displayed in an analog fashion we use a circular metaphor and analog representations in our screens whenever desirable. The circular metaphor on the screen works well with the roller wheel.

Rolling the wheel also causes a scrolling action when textual content is displayed on the screen. Clicking the wheel causes a selection action similar to a mouse click. For instance in the case of setting time, rolling the wheel moves the hands and clicking the wheel sets the time to the current time displayed by the hands.

The availability of the back button provides a quick way to undo tasks or revert to previously computed screens and is very convenient and saves time in many instances. For example we found that some users were looking for a person's phone number and then would quickly want to check what time it was at the person's location and would go back to the clock, and in the meanwhile forget the phone number they just looked up. We solve situations like this by allowing the user to jump to the watch face with one touch and then get back to the previous screen with another touch.

The history stack maintained for the back button functionality does not preserve every screen; only a few canonical screens are preserved for any application. So for example it would be quite useless to preserve every screen update that was made during a stopwatch application that counted milli seconds.

We found that touch screens on watches are also activated accidentally by people trying to keep their watch screens clean. To address this, we use a variable time-out mechanism that returns the watch to the time screen from any screen after a time-out interval. Furthermore, the time-out period is initially set to a small value and increased gradually till it reaches an upper limit if the user is actively using the applications. For instance the time-out interval starts at 10 seconds. After the first interaction with the watch (tap on screen/activation of wheel) the watch will time out to the clock face in 10 seconds if there is no

further interaction. If there is a second interaction within the 10 seconds the time-out is increased to 20 seconds and so on till it reaches say one minute. If at any point the watch times out to the clock face, the time-out interval is reset to 10 seconds. This mechanism ensures that accidental activations quickly revert the watch to the clock without annoying the user with spurious time-outs when the watch is being used actively.

5 Data Model

Since the wrist watch computer does not have a keyboard, textual content will most likely be created on other devices, such as PCs, and transferred to the watch. One interesting issue is how to represent this textual content on the wrist watch computer to make it most accessible to the user.

We chose to use Wireless Markup Language (WML) as the text format on the watch. Besides being an emerging standard that is expected to be widely accepted, WML has the additional desirable feature of being an XML document type and therefore supports the notion of hyperlinks, an intuitive and well accepted navigation model. We expect WML to be a standard format for publication of content for small form-factor devices like cellular phone, and hope to be able to use such content on the watch without change.

All textual information on the wrist watch computer such as list of appointments, todo lists, email messages, etc., are stored as WML cards. Typically such information will be resident on a PC or other servers. As part of the synchronization software that extracts this information and sends it into the wrist watch computer, the information will be transcoded into WML along with the appropriate hypertext links. For example, a calendar entry can be scanned for people's names and the names are turned into WML hyperlinks that point to the corresponding cards in the address book. In addition, each calendar entry is automatically linked with the previous and next entries to aid in the navigation.

When the watch displays WML content, rolling the wheel causes the current highlight to jump from hyperlink to hyperlink in the appropriate direction. Clicking the wheel in causes an activation of the hyperlink, i.e., navigation to the card pointed to by the hyperlink.

6 Applications

We surveyed prospective wrist watch computer users, who told us they would like to see watch functions, personal information management (PIM) applications (calendar, phone book, to dos), games, and an MP3 music player, on the wrist watch computer. Access to data from

the web was cited as an important application as well. This included alerts, stock quotes, sports scores, email headers, headline news, weather and traffic reports etc.

We have implemented an prototype application environment for the wrist watch computer and have created several of the requested applications. The




Figure 3: Clock Face

following sections discuss some of the above applications. With the power of such a device, one can easily imagine more applications, some highly personalized, some customized to games and trivia, etc.

6.1 Clock face

The primary display on the wrist watch is a clock face showing current time and date (see Figure 3). This is the default screen to which we come back to when the return-to-home function is invoked by tapping on the top left zone on the touch panel.

On the clock face screen we decided that the top right touch zone should provide access to alarms, and the bottom right region should access the phone book since these are likely to be the most common applications. As discussed earlier, the top left zone in this screen will present the main menu or the application launch pad. Rolling the roller wheel will cycle through the days schedule. Pressing the roller wheel will provide access to the *quiet time* function (discussed below). This allocation allows one action access to key functions of the device - calendar, phone book, alarms, and turning off alarms.

6.2 Icon ring - application selector

The set of applications on a watch is expected to be quite small for any given person, perhaps of the order of a dozen or so. In keeping with the circular metaphor and using the roller wheel for most interactions, we chose to represent the application menu by means of icons that we position around a circle as shown in Figure 4.

The user can roll the wheel clockwise or counterclockwise to move the selection from one icon to another. Once the desired icon is selected, the user clicks the roller wheel in to launch the application.

It is quite difficult to create culture-neutral, self-evident icons that unambiguously convey functional purpose. The small size and limited color depth of the

wrist watch computer display makes this even more difficult. It is generally quite difficult to design such icons unless one has color pixels and a reasonable physical area for the icons. As a result, it is important for functional icons to have captions that explain their function.

Users will initially rely on the caption, but gradually become familiar with the icons and use them directly. Since the screen dimensions are small, we cannot show all icons and their captions at the same time. Though icons can be small, the caption font has to be proportionally quite large to be legible. Therefore we chose to display just the caption for currently highlighted icon in the center of the icon ring. As the user rolls the wheel to move the highlight, the caption changes accordingly.

Based on user experiments, we restricted the number of icons shown on a screen to eight. If there are more than



Figure 4: Icon Ring

eight applications, we can place them on consecutive menu pages that one can access by touching the top right or bottom right zones of the touch screen to go to the previous page or next page of applications respectively.

Initial experience with this environment leads us to believe that users will be able to navigate to the right application page by tapping in corners of the wrist watch computer without looking at the display. For instance if a user has two application screens and knows that the application of interest is in the second page a top left tap followed by a bottom right tap will get the user to the appropriate menu page.

Once in the right page, the user will have to look at the display while he selects the application icon by rolling the wheel and launches it by clicking the wheel. On any menu screen we put the most commonly used application in that screen as the default highlighted item. In this case, the user does not even have to look at the screen to launch his application, he just has to count the number of screen taps and follow it with a wheel click.

6.3 Alarms

An alarm can be associated with a specific time, a calendar entry, a to do entry, and to software agents either running on the watch or remotely.

Alarms associated with time can be set by adjusting the hour first and then adjusting the minute hand. Alarms can



Figure 5: Alarm Message

be set relative to the current time or on an absolute basis. For example, relative alarms are useful to remind people to shut the stove off in twenty minutes. A bell is displayed on the screen at the time for which the alarm is set, e.g., an alarm for 7 AM will be represented by a bell at the 7 AM position on the clock face.

When an alarm is activated the wrist watch computer plays a sound on the speaker and presents the associated message title if any, on the display. In addition to the message title, options to acknowledge, snooze, and delete, are depicted as shown in Figure 5. The “acknowledge (OK)” option is highlighted when the alarm rings.

When the alarm is ringing, the user can silence it by touching any part of the touch screen or by rotating the roller wheel or even by pressing in the roller switch. The focus here is to quickly silence the alarm since this is the first thing that the user would want to do.

After the alarm has been silenced the watch will continue to display the message title associated with the alarm for some time interval, say 30 seconds. If the user taps on the touch screen again within these 30 seconds, the user acknowledges the alarm and the alarm is canceled. Once an alarm is canceled, the message is removed from the screen and the watch reverts back to showing the current time.

If the user does not tap the alarm a second time within the specified duration, and does nothing, the alarm message title disappears and the alarm is automatically *snoozed*, i.e., the alarm will ring again after a snooze interval.

The user also has the ability to proactively snooze the alarm without waiting for the time-out by rolling the wheel to highlight the snooze option and clicking the wheel to select it. The alarm text may also have hyperlinks to other pieces of information (for example a name in the message text may be a hyperlink to the person’s phone number) that the user may navigate to by selecting the link and clicking the wheel.

The salient part of this user interface to alarms is the consistency and simplicity of actions the user needs to take to silence, snooze or view the details for the alarm. A single tap silences the alarm, a double tap cancels the alarm, a single tap and time-out *snoozes* the alarm.

Single or double taps on the watch face do not require the user to even look at the watch and can be done while

doing other things such as engaging in a conversation, reading a newspaper, etc. Using a tap followed by a roller wheel and click can launch other actions, but in this case the user needs to pay more attention to the watch, i.e., look at it. Still if the list of possible options is small the amount of user distraction is minimal.

6.4 Quiet Time




Figure 6: Quiet Time

We allow the user to set a *quiet time* from the clock face screen. It is activated by pressing the roller wheel. This application quickly allows the user to turn off audible alarms until a specified time as shown in Figure 6. The time is specified by rolling the wheel to the desired time and pressing the roller wheel. Once the quiet time elapses the alarms are re-enabled automatically and any pending alarms are sounded.




Figure 7: Alphabet Selector

6.5 Alphabet Selector

Since the wrist watch computer has no keyboard, text must be entered with either the roller wheel or the touch screen. We do not expect the user to enter much text, but some will be required. We are testing one text input model as part of the name and address book application.

In these situations all textual input must be accomplished using the roller wheel or the touch screen.

When the user needs to look up a phone number the user is presented with a screen that looks like the one shown in Figure 7. The letters from A through Z are presented in a pair of concentric circles. We had to put the letters in two circles since putting them all on one circle made it look very cluttered and hampered readability.

As the user rolls the wheel the selection cursor moves from character to character.

Once the user has the highlight on the right character, pushing in the roller wheel causes phone numbers corresponding to all names that begin with that letter to be displayed. These can then be scrolled through with the roller wheel. The advantage of placing the letters in this fashion is that the user can quickly select the desired character without much difficulty. The user can perceive at a glance where the desired character is located and simply roll the wheel, peripherally observing the highlight till it gets into the vicinity of the desired character. At this point a marginally higher level of concentration is required to match up the highlight with the desired character.

The same scheme could be used to provide longer input strings to the watch that consist of say alphabets, numbers and a limited set of punctuations (to enter a phone number for example).

6.6 Calendar

The high resolution display allows a complete month




Figure 8: Calendar Month View

view to be displayed on the watch as shown in Figure 8. Scrolling past the last day of the month gets you to the next month and scrolling past the first day of the month




Figure 9: Calendar Day View

gets you to the previous month. The next month and previous month hyperlinks get you there as well. Upon selection of a particular day, the day view shown in Figure 9 is displayed.

6.7 To Do list




Figure 10: To Do List

To do lists can be shown as in Figure 10. These to do lists are typically created on a PC or other device. Items can be checked off by pushing the roller wheel after positioning the highlight on the right item. It would be simple to have a predefined set of to dos in the watch and then allow the user to create a list from the predefined list. The predefined list could be personalized and downloaded in to the watch.

6.8 Images

Since we are designing for a high resolution display, we can easily display images on the watch, such as photographs of one's family members for example. We do not support gray scale or color in the initial versions of the watch, however, it is quite easy to simulate gray scale



Figure 11: Family Photo

using spatial dithering. Since the display has a very fine




Figure 12: Dilbert Cartoon

dot pitch, the dithering is normally not perceptible to the human eye.

In addition to photographs, one can easily load images such as cartoon strips into the watch and read them for amusement. Figures 11 and 12 show the results.

6.9 Games - Tetris




Figure 13: Tetris

It was interesting to see if we could use the limited input function on the wrist watch computer to support a

game. We found a public implementation of a game similar to Tetris™ and found we were able to map it to the wrist watch computer controls. To play a game like Tetris™ one needs to be able to both move as well as rotate falling pieces. In addition, players like the ability to drop a falling piece quickly once it is in the correct position and orientation. The ability to pause and resume the game is also an important requirement.

Given the limited input capabilities of the watch, it is a challenge to accomplish all of the above controls. The way we solved this problem is to map movement and rotation to the roller wheel and pause/resume and drop functions to the touch screen.

The roller wheel can be in one of two modes, *rotate* or *move*. If it is in the *rotate* mode turning the wheel rotates the piece in the direction the wheel was rotated. If the wheel is in the *move* mode, turning the wheel moves the piece to the left or right. One can switch the mode of the wheel between *rotate* and *move* by clicking it in. When a new piece starts falling the wheel always reverts to the *rotate* mode since in our observations of Tetris players we noticed that they first oriented the piece the right way, then moved it and usually dropped it. However, this is not always true and sometimes one rotates the piece moves it and then changes ones mind, rotates it again to a new orientation and may move it again. For this reason till the piece actually hits the bottom one is allowed to alternate modes by clicking the wheel in. Admittedly this is a bit more cumbersome than having separate controls for rotate and move, but as we pointed out earlier, we are constrained in our input capabilities due to requirements.

7 Conclusions

We have demonstrated that with a careful design it is possible to navigate to and employ several applications on a device with the form factor of a watch and present data in a timely fashion in spite of the limited screen size and input capabilities.

8 Acknowledgments

We would like to thank Noboru Kamijoh and his team in the IBM Tokyo Research Lab for their dedicated work

to building the various pieces of hardware for the wrist watch computer. We thank Sunil Sreenivasan for providing help with the software architecture, John Karidis for help with conceptual design, Tom Cippolla for packaging design. Several others have been reviewed and critiqued the work described in this paper and we are thankful to them. Finally, we would like to thank our management for giving us the opportunity to work in this exciting space.

9 References

- [1] Seiko Ruputer™ <http://sv.ruputer.com/english/>
- [2] onHand™ PC, the world's smallest computer <http://www.onhandpc.com/>
- [3] Timex Beepwear™ <http://www.beepwear.com/html/index.html>
- [4] Timex Datalink™ Watch http://www.timex.com/html/data_link.html/
- [5] Casio Wrist Watch Camera WQV-1™, Casio WMP-1V™ Wrist Audio Player, Casio PC-UNITE BZX-20™ and BZX-20D™ Wrist-type Wearable PIM Data Viewers <http://www.casio-usa.com/corporate/index.cfm?act=10&ID=734&CFID=496231&CFTOKEN=31158399#WristCamera>
- [6] Casio Satellite Navi Watch™ <http://www.casio.co.jp/English/gpswe/top.html>
- [7] Developers are gearing up for watch phones and watch computers, PC Magazine, December 6, 1999
- [8] Watches for the 21st Century http://www.timedesign.de/info/future_e.html
- [9] Wrist top computing, PC Magazine <http://www.zdnet.com/pcmag/stories/trends/0%2C7607%2C2403640%2C00.html>
- [10] Swatch Access Watch™ <http://www.wired.com/news/technology/0,1282,6220,00.html>