

Efficient and Parsimonious Agnostic Active Learning

Tzu-Kuo Huang[†] Alekh Agarwal[†] Daniel J. Hsu[‡]
tkhuang@microsoft.com alekha@microsoft.com djhsu@cs.columbia.edu

John Langford[†] Robert E. Schapire[†]
jcl@microsoft.com schapire@microsoft.com

Microsoft Research[†] Department of Computer Science[‡]
New York, NY Columbia University, New York, NY

Abstract

We develop a new active learning algorithm for the streaming setting satisfying three important properties: 1) It provably works for any classifier representation and classification problem including those with severe noise. 2) It is efficiently implementable with an ERM oracle. 3) It is more aggressive than all previous approaches satisfying 1 and 2. To do this we create an algorithm based on a newly defined optimization problem and analyze it. We also conduct the first experimental analysis of all efficient agnostic active learning algorithms, evaluating their strengths and weaknesses in different settings.

1 Introduction

How can you best learn a classifier given a label budget?

Active learning approaches are known to yield exponential improvements over supervised learning under strong assumptions [Cohn et al., 1994]. Under much weaker assumptions, streaming-based agnostic active learning [Balcan et al., 2006, Beygelzimer et al., 2009, 2010, Dasgupta et al., 2007, Zhang and Chaudhuri, 2014] is particularly appealing since it is known to work for *any* classifier representation and *any* label noise distribution with an i.i.d. data source.¹ Here, a learning algorithm decides for each unlabeled example in sequence whether or not to request a label, never revisiting this decision. Restated then: What is the best possible active learning algorithm which works for *any* classifier representation, *any* label noise distribution, and is computationally tractable?

Computational tractability is a critical concern, because most known algorithms for this setting [e.g., Balcan et al., 2006, Koltchinskii, 2010, Zhang and Chaudhuri, 2014] require explicit enumeration of classifiers, implying exponentially-worse computational complexity compared to typical supervised learning algorithms. Active learning algorithms based on empirical risk minimization (ERM) oracles [Beygelzimer et al., 2009, 2010, Hsu, 2010] can overcome this intractability by using passive classification algorithms as the oracle to achieve a computationally acceptable solution.

Achieving generality, robustness, and acceptable computation has a cost. For the above methods [Beygelzimer et al., 2009, 2010, Hsu, 2010], a label is requested on nearly *every* unlabeled example where two empirically good classifiers disagree. This results in a poor label complexity, well short of information-theoretic limits [Castro and Nowak, 2008] even for general robust solutions [Zhang and Chaudhuri, 2014]. Until now.

In Section 3, we design a new algorithm ACTIVE COVER (AC) for constructing query probability functions that minimize the probability of querying inside the *disagreement region*—the set of points where good classifiers disagree—and never query otherwise. This requires a new algorithm that maintains a parsimonious cover of the set of empirically good classifiers. The cover is a result of solving an optimization problem (in Section 5) specifying the properties of a desirable query probability function. The cover size provides a practical knob between computation and label complexity, as demonstrated by the complexity analysis we present in Section 5.

In Section 4, we provide our main results which demonstrate that AC effectively maintains a set of good classifiers, achieves good generalization error, and has a label complexity bound tighter than previous approaches. The label complexity bound depends on the disagreement coefficient [Hanneke, 2009], which does not completely capture the advantage of the algorithm. In Section 4.2.2, we provide an example of a hard active learning problem where AC is

¹See the monograph of Hanneke [2014] for an overview of the existing literature, including alternative settings where additional assumptions are placed on the data source (e.g., *separability*) as is common in other works [Dasgupta, 2005, Balcan et al., 2007, Balcan and Long, 2013].

substantially superior to previous tractable approaches. Together, these results show that AC is better and sometimes substantially better in theory. The key aspects in the proof of our generalization results are presented in Section 7, with more technical details and label complexity analysis presented in the appendix.

Do agnostic active learning algorithms work in practice? No previous works have addressed this question empirically. Doing so is important because analysis cannot reveal the degree to which existing classification algorithms effectively provide an ERM oracle. We conduct an extensive study in Section 6 by simulating the interaction of the active learning algorithm with a streaming supervised dataset. Results on a wide array of datasets show that agnostic active learning typically outperforms passive learning, and the magnitude of improvement depends on how carefully the active learning hyper-parameters are chosen.

2 Preliminaries

Let $\mathcal{H} \subseteq \{\pm 1\}^{\mathcal{X}}$ be a set of binary classifiers, which we assume is finite for simplicity.² Let $\mathbb{E}_X[\cdot]$ denote expectation with respect to $X \sim \mathbb{P}_{\mathcal{X}}$, the marginal of \mathbb{P} over \mathcal{X} . The *expected error* of a classifier $h \in \mathcal{H}$ is $\text{err}(h) := \Pr_{(X,Y) \sim \mathbb{P}}(h(X) \neq Y)$, and the error minimizer is denoted by $h^* := \arg \min_{h \in \mathcal{H}} \text{err}(h)$. The (*importance weighted*) *empirical error* of $h \in \mathcal{H}$ on a multiset S of importance weighted and labeled examples drawn from $\mathcal{X} \times \{\pm 1\} \times \mathbb{R}_+$ is $\text{err}(h, S) := \sum_{(x,y,w) \in S} w \cdot \mathbb{1}(h(x) \neq y) / |S|$. The *disagreement region* for a subset of classifiers $A \subseteq \mathcal{H}$ is $\text{DIS}(A) := \{x \in \mathcal{X} \mid \exists h, h' \in A \text{ such that } h(x) \neq h'(x)\}$. The *regret* of a classifier $h \in \mathcal{H}$ relative to another $h' \in \mathcal{H}$ is $\text{reg}(h, h') := \text{err}(h) - \text{err}(h')$, and the analogous empirical regret on S is $\text{reg}(h, h', S) := \text{err}(h, S) - \text{err}(h', S)$. When the second classifier h' in (empirical) regret is omitted, it is taken to be the (empirical) error minimizer in \mathcal{H} .

A streaming-based active learner receives i.i.d. labeled examples $(X_1, Y_1), (X_2, Y_2), \dots$ from \mathbb{P} one at a time; each label Y_i is hidden unless the learner decides on the spot to query it. The goal is to produce a classifier $h \in \mathcal{H}$ with low error $\text{err}(h)$, while querying as few labels as possible.

In the IWAL framework [Beygelzimer et al., 2009], a decision whether or not to query a label is made *randomly*: the learner picks a probability $p \in [0, 1]$, and queries the label with that probability. Whenever $p > 0$, an unbiased error estimate can be produced using inverse probability weighting [Horvitz and Thompson, 1952]. Specifically, for any classifier h , an unbiased estimator E of $\text{err}(h)$ based on $(X, Y) \sim \mathbb{P}$ and p is as follows: if Y is queried, then $E = \mathbb{1}(h(X) \neq Y) / p$; else, $E = 0$. It is easy to check that $\mathbb{E}(E) = \text{err}(h)$. Thus, when the label is queried, we produce the importance weighted labeled example $(X, Y, 1/p)$.³

3 Algorithm

Our new algorithm, shown in Algorithm 1, breaks the example stream into epochs. The algorithm admits any epoch schedule so long as the epoch lengths satisfy $\tau_{m-1} \leq 2\tau_m$. For technical reasons, we always query the first 3 labels to kick-start the algorithm. At the start of epoch m , AC computes a *query probability function* $P_m: \mathcal{X} \rightarrow [0, 1]$ which will be used for sampling the data points to query during the epoch. This is done by maintaining a few objects of interest during each epoch:

1. In step 1, we compute the best classifier on the sample \tilde{Z}_m that we have collected so far. Note that the sample consists of the queried, true labels on some examples, while predicted labels for the others.
2. A radius Δ_m is computed in step 2 based on the desired level of concentration we want the various empirical quantities to satisfy.
3. The set A_{m+1} in step 3 consists of all the hypotheses which are good according to our sample \tilde{Z}_m , with the notion of good being measured as empirical regret being at most Δ_m .

²The assumption that \mathcal{H} is finite can be relaxed to VC-classes using standard arguments.

³If the label is not queried, we produce an ignored example of weight zero; its only purpose is to maintain the correct count of querying opportunities. This ensures that $1/|S|$ is the correct normalization in $\text{err}(h, S)$.

⁴See Footnote 3. Adding an example of importance weight zero simply increments $|S|$ without updating other state of the algorithm, hence the label used does not matter.

Algorithm 1 ACTIVE COVER (AC)

input: Constants c_1, c_2, c_3 , confidence δ , error radius γ , parameters α, β, ξ for (OP), epoch schedule $0 = \tau_0 < 3 = \tau_1 < \tau_2 < \tau_3 < \dots < \tau_M$ satisfying $\tau_{m+1} \leq 2\tau_m$ for $m \geq 1$.

initialize: epoch $m = 0$, $\tilde{Z}_0 := \emptyset$, $\Delta_0 := c_1\sqrt{\epsilon_1} + c_2\epsilon_1 \log 3$, where

$$\epsilon_m := \frac{32(\log(|\mathcal{H}|/\delta) + \log \tau_m)}{\tau_m}.$$

- 1: **for** $i = 4, \dots, n$, **do**
- 2: **if** $i = \tau_m + 1$ **then**
- 3: Set $\tilde{Z}_m = \tilde{Z}_{m-1} \cup S$, and $S = \emptyset$.
- 4: Let

$$h_{m+1} := \arg \min_{h \in \mathcal{H}} \text{err}(h, \tilde{Z}_m), \quad (1)$$

$$\Delta_m := c_1\sqrt{\epsilon_m \text{err}(h_{m+1}, \tilde{Z}_m)} + c_2\epsilon_m \log \tau_m, \quad (2)$$

$$A_{m+1} := \{h \mid \text{err}(h, \tilde{Z}_m) - \text{err}(h_{m+1}, \tilde{Z}_m) \leq \gamma\Delta_m\}. \quad (3)$$

- 5: Compute the solution $P_{m+1}(\cdot)$ to the optimization problem (5).
- 6: $m := m + 1$.
- 7: **end if**
- 8: Receive unlabeled data point X_i .
- 9: **if** $X_i \in D_m := \text{DIS}(A_m)$, **then**
- 10: Draw $Q_i \sim \text{Bernoulli}(P_m(X_i))$.
- 11: Update the set of examples:⁴

$$S := \begin{cases} S \cup \{(X_i, Y_i, 1/P_m(X_i))\}, & Q_i = 1 \\ S \cup \{X_i, 1, 0\}, & \text{otherwise.} \end{cases}$$

- 12: **else**
 - 13: $S := S \cup \{(X_i, h_m(X_i), 1)\}$.
 - 14: **end if**
 - 15: **end for**
 - 16: $h_{M+1} := \arg \min_{h \in \mathcal{H}} \text{err}(h, \tilde{Z}_M)$.
-

Within the epoch, P_m determines the probability of querying an example in the disagreement region for this set A_m of “good” classifiers; examples outside this region are not queried but given labels predicted by h_m . Consequently, the sample is not unbiased unlike some of the predecessors of our work. The various constants in Algorithm 1 must satisfy:

$$\begin{aligned} \alpha \geq 1, \quad \eta \geq 864, \quad \xi \leq \frac{1}{8n\epsilon_M \log n}, \quad \beta^2 \leq \frac{\eta}{864\gamma n\epsilon_M \log n}, \quad \gamma \geq \eta/4, \\ c_1 \geq 2\alpha\sqrt{6}, \quad c_2 \geq \eta c_1^2/4, \quad c_3 \geq 1. \end{aligned} \quad (4)$$

Epoch Schedules: The algorithm as stated takes an arbitrary epoch schedule subject to $\tau_m < \tau_{m+1} \leq 2\tau_m$. Two natural extremes are unit-length epochs, $\tau_m = m$, and doubling epochs, $\tau_{m+1} = 2\tau_m$. The main difference comes in the number of times (OP) is solved, which is a substantial computational consideration. Unless otherwise stated, we

assume the doubling epoch schedule so that the query probability and ERM classifier are recomputed only $\mathcal{O}(\log n)$ times.

Optimization problem (OP) to obtain P_m : AC computes P_m as the solution to the optimization problem (OP). In essence, the problem encodes the properties of a query probability function that are essential to ensure good generalization, while maintaining a low label complexity. As we will discuss later, some of the previous works can be seen as specific ways of constructing feasible solutions to this optimization problem. The objective function of (OP) encourages small query probabilities in order to minimize the label complexity. It might appear odd that we do not use the more obvious choice for objective which would be $\mathbb{E}_X[P(X)]$, however our choice simultaneously encourages low query probabilities and also provides a barrier for the constraint $P(X) \leq 1$ —an important algorithmic aspect as we will discuss in Section 5.

The constraints (5) in (OP) bound the variance in our importance-weighted regret estimates for every $h \in \mathcal{H}$. This is key to ensuring good generalization as we will later use Bernstein-style bounds which rely on our random variables having a small variance. Let us examine these constraints in more detail. The LHS of the constraints measures the variance in our empirical regret estimates for h , measured only on the examples in the disagreement region D_m . This is because the importance weights in the form of $1/P_m(X)$ are only applied to these examples; outside this region we use the predicted labels with an importance weight of 1. The RHS of the constraint consists of three terms. The first term ensures the feasibility of the problem, as $P(X) \equiv 1/(2\alpha^2)$ for $X \in D_m$ will always satisfy the constraints. The second empirical regret term makes the constraints easy to satisfy for bad hypotheses—this is crucial to rule out large label complexities in case there are bad hypotheses that disagree very often with h_m . A benefit of this is easily seen when $-h_m \in \mathcal{H}$, which might have a terrible regret, but would force a near-constant query probability on the disagreement region if $\beta = 0$. Finally, the third term will be on the same order as the second one for hypotheses in A_m , and is only included to capture the allowed level of slack in our constraints which will be exploited for the efficient implementation in Section 5.

Of course, variance alone is not adequate to ensure concentration, and we also require the random variables of interest to be appropriately bounded. This is ensured through the constraints (6), which impose a minimum query probability on the disagreement region. Outside the disagreement region, we use the predicted label with an importance weight of 1, so that our estimates will always be bounded (albeit biased) in this region. Note that this optimization problem is written with respect to the marginal distribution of the data points \mathbb{P}_X , meaning that we might have infinite number of the latter constraints. In Section 5, we describe how to solve this optimization problem efficiently, and using access to only unlabeled examples drawn from \mathbb{P}_X .

Finally we verify that the choices for P_m according to some of the previous methods are indeed feasible in (OP). This is most easily seen for Oracular CAL [Hsu, 2010] which queries with probability 1 if $X \in D_m$ and 0 otherwise. Since $\alpha \geq 1$ (4) in the variance constraints (5), the choice $P(X) \equiv 1$ for $X \in D_m$ is feasible for (OP), and consequently Oracular CAL always queries more often than the optimal distribution P_m at each epoch. A similar argument can also be made for the IWAL method [Beygelzimer et al., 2010], which also queries in the disagreement region with probability 1, and hence suffers from the same sub-optimality compared to our choice.

4 Generalization and Label Complexity

We now present guarantees on the generalization error and label complexity of Algorithm 1 assuming a solver for (OP), which we provide in the next section.

4.1 Generalization guarantees

Our first theorem provides a bound on generalization error. Define

$$\begin{aligned} \overline{\text{err}}_m(h) &:= \frac{1}{\tau_m} \sum_{j=1}^m (\tau_j - \tau_{j-1}) \mathbb{E}_{(X,Y) \sim \mathbb{P}} [\mathbf{1}(h(X) \neq Y \wedge X \in D_j)], \\ \Delta_0^* &:= \Delta_0 \quad \text{and} \quad \Delta_m^* := c_1 \sqrt{\epsilon_m \overline{\text{err}}_m(h^*)} + c_2 \epsilon_m \log \tau_m \quad \text{for } m \geq 1. \end{aligned}$$

Optimization Problem (OP) to compute P_m

$$\begin{aligned} \min_P \quad & \mathbb{E}_X \left[\frac{1}{1 - P(X)} \right] \\ \text{s.t.} \quad & \forall h \in \mathcal{H} \quad \mathbb{E}_X \left[\frac{\mathbb{1}(h(x) \neq h_m(x) \wedge x \in D_m)}{P(X)} \right] \leq b_m(h), \end{aligned} \quad (5)$$

$$\forall x \in \mathcal{X} \quad 0 \leq P(x) \leq 1, \quad \text{and} \quad \forall x \in D_m \quad P(x) \geq P_{\min, m} \quad (6)$$

where $\mathcal{I}_h^m(X) = \mathbb{1}(h(x) \neq h_m(x) \wedge x \in D_m)$,

$b_m(h) = 2\alpha^2 \mathbb{E}_X[\mathcal{I}_h^m(X)] + 2\beta^2 \gamma \text{reg}(h, h_m, \tilde{Z}_{m-1}) \tau_{m-1} \Delta_{m-1} + \xi \tau_{m-1} \Delta_{m-1}^2$, and

$$P_{\min, m} = \min \left(\frac{c_3}{\sqrt{\frac{\tau_{m-1} \text{err}(h_m, \tilde{Z}_{m-1})}{n \epsilon_M}} + \log \tau_{m-1}}, \frac{1}{2} \right). \quad (7)$$

Essentially Δ_m^* is a population counterpart of the quantity Δ_m used in Algorithm 1, and crucially relies on $\overline{\text{err}}_m(h^*)$, the true error of h^* restricted to the disagreement region instead of the empirical error of the ERM at epoch m . This quantity captures the inherent noisiness of the problem, and modulates the transition between $\mathcal{O}(1/\sqrt{n})$ to $\mathcal{O}(1/n)$ type error bounds as we see next.

Theorem 1. *Pick any $0 < \delta < 1/e$ such that $|\mathcal{H}|/\delta > \sqrt{192}$. Then recalling that $h^* = \arg \min_{h \in \mathcal{H}} \text{err}(h)$, we have for all epochs $m = 1, 2, \dots, M$, with probability at least $1 - \delta$*

$$\text{reg}(h, h^*) \leq 16\gamma \Delta_m^* \quad \text{for all } h \in A_{m+1}, \quad \text{and} \quad (8)$$

$$\text{reg}(h^*, h_{m+1}, \tilde{Z}_m) \leq \eta \Delta_m / 4. \quad (9)$$

The theorem is proved in Section 7.2.2, using the overall analysis framework described in Section 7.

Since we use $\gamma \geq \eta/4$, the bound (9) implies that $h^* \in A_m$ for all epochs m . This also maintains that all the predicted labels used by our algorithm are identical to those of h^* , since no disagreement amongst classifiers in A_m was observed on those examples. This observation will be critical to our proofs, where we will exploit the fact that using labels predicted by h^* instead of observed labels on certain examples only introduces a bias in favor of h^* , thereby ensuring that we never mistakenly drop the optimal classifier from our version space A_m .

The bound (8) shows that every hypothesis in A_{m+1} has a small regret to h^* . Since the ERM classifier h_{m+1} is always in A_{m+1} , this yields our main generalization error bound on the classifier h_{τ_m+1} output by Algorithm 1. Additionally, it also clarifies the definition of the sets A_m as the set of good classifiers: these are classifiers which have small population regret relative to h^* indeed. In the worst case, if $\overline{\text{err}}_m(h^*)$ is a constant, then the overall regret bound is $\mathcal{O}(1/\sqrt{n})$. The actual rates implied by the theorem, however depend on the properties of the distribution and below we illustrate this with two corollaries. We start with a simple specialization to the realizable setting.

Corollary 1 (Realizable case). *Under the conditions of Theorem 1, suppose further that $\text{err}(h^*) = 0$. Then $\Delta_m = \Delta_m^* = c_2 \tau_m \log \tau_m$ and hence $\text{reg}(h, h^*) \leq 16c_2 \tau_m \log \tau_m$ for all hypotheses $h \in A_{m+1}$.*

In words, the corollary demonstrates a $\tilde{O}(1/n)$ rate after seeing n unlabeled examples in the realizable setting. Of course the use of $\overline{\text{err}}_m(h^*)$ in defining Δ_m^* allows us to retain the fast rates even when h^* makes some errors but they do not fall in the disagreement region of good classifiers. One intuitive condition that controls the errors within the disagreement region is the low-noise condition of Tsybakov [2004], which asserts that there exist constants $\zeta > 0$ and $0 < \omega \leq 1$ such that

$$\Pr(h(X) \neq h^*(X)) \leq \zeta \cdot (\text{err}(h) - \text{err}(h^*))^\omega, \quad \forall h \in \mathcal{H} \text{ such that } \text{err}(h) - \text{err}(h^*) \leq \varepsilon_0. \quad (10)$$

Under this assumption, the extreme $\omega = 0$ corresponds to the worst-case setting while $\omega = 1$ corresponds to h^* having a zero error on disagreement set of the classifiers with regret at most ε_0 . Under this assumption, we get the following corollary of Theorem 1.

Corollary 2 (Tsybakov noise). *Under conditions of Theorem 1, suppose further that Tsybakov’s low-noise condition (10) is satisfied with some parameters ζ, ω , and $\varepsilon_0 = 1$. Then after m epochs, we have $\text{reg}(h, h^*) = \tilde{O}\left(\tau_m^{-\frac{1}{2-\omega}} \log(|\mathcal{H}|/\delta)\right)$.*

The proof of this result is deferred to Appendix E. It is worth noting that the rates obtained here are known to be unimprovable for even passive learning under the Tsybakov noise condition [Castro and Nowak, 2008].⁵ Consequently, there is no loss of statistical efficiency in using our active learning approach. The result is easily extended for other values of ε_0 by using the worst-case bound until the first epoch m_0 when $16\gamma\Delta_{m_0}^*$ drops below ε_0 and then apply our analysis above from m_0 onwards. We leave this development to the reader.

4.2 Label complexity

Generalization alone does not convey the entire quality of an active learning algorithm, since a trivial algorithm queries always with probability 1, thereby matching the generalization guarantees of passive learning. In this section, we show that our algorithm can achieve the aforementioned generalization guarantees, despite having a small label complexity in favorable situations. We begin with a worst-case result in the agnostic setting, and then describe a specific example which demonstrates some key differences of our approach from its predecessors.

4.2.1 Disagreement-based label complexity bounds

In order to quantify the extent of gains over passive learning, we measure the hardness of our problem using the disagreement coefficient [Hanneke, 2014], which is defined as

$$\theta = \theta(h^*) := \sup_{r>0} \frac{\mathbb{P}_{\mathcal{X}}\{x \mid \exists h \in \mathcal{H} \text{ s.t. } h^*(x) \neq h(x), \mathbb{P}_{\mathcal{X}}\{x' \mid h(x') \neq h^*(x')\} \leq r\}}{r}. \quad (11)$$

Intuitively, given a set of classifiers \mathcal{H} and a data distribution \mathbb{P} , an active learning problem is easy if good classifiers disagree on only a small fraction of the examples, so that the active learning algorithm can increasingly restrict attention only to this set. With this definition, we have the following result for the label complexity of Algorithm 1.

Theorem 2. *Under conditions of Theorem 1, with probability at least $1 - \delta$, the number of label queries made by Algorithm 1 after n examples over M epochs is at most*

$$4\theta\overline{\text{err}}_M(h^*)n + \theta \cdot \tilde{O}\left(\sqrt{n\overline{\text{err}}_M(h^*) \log(|\mathcal{H}|/\delta)} + \log(|\mathcal{H}|/\delta)\right) + 4\log(8(\log n)/\delta).$$

The proof is in Appendix D. The dominant first term of the label complexity bound is linear in the number of unlabeled examples, but can be quite small if θ is small, or if $\overline{\text{err}}_M(h^*) \approx 0$ —it is indeed 0 in the realizable setting. We illustrate this aspect of the theorem with a corollary for the realizable setting.

⁵ ω in our statement of the low-noise condition (10) corresponds to $1/\kappa$ in the results of Castro and Nowak [2008].

Corollary 3 (Realizable case). *Under the conditions of Theorem 2, suppose further that $\text{err}(h^*) = 0$. Then the expected number of label queries made by Algorithm 1 is at most $\theta \tilde{O}(\log(|\mathcal{H}|/\delta))$.*

In words, we attain a logarithmic label complexity in the realizable setting, so long as the disagreement coefficient is bounded. We contrast this with the label complexity of IWAL [Beygelzimer et al., 2010], which grows as $\theta\sqrt{n}$ independent of $\text{err}(h^*)$. This leads to an exponential difference in the label complexities of the two methods in low-noise problems. A much closer comparison is with respect to the Oracular CAL algorithm [Hsu, 2010], which does have a dependence on $\sqrt{n\text{err}(h^*)}$ in the second term, but has a worse dependence on the disagreement coefficient θ .

Just like Corollary 2, we can also obtain improved bounds on label complexity under the Tsybakov noise condition.

Corollary 4 (Tsybakov noise). *Under conditions of Theorem 2, suppose further that the disagreement coefficient θ is bounded and Tsybakov’s low-noise condition (10) is satisfied with some parameters ζ, ω , and $\varepsilon_0 = 1$. Then after m epochs, the expected number of label queries made by Algorithm 1 is at most $\tilde{O}\left(\frac{2(1-\omega)}{\tau_m^{2-\omega}} \log(|\mathcal{H}|/\delta)\right)$.*

The proof of this result is deferred to Appendix E. The label complexity obtained above is indeed optimal in terms of the dependence on n , the number of unlabeled examples, matching known information-theoretic rates of Castro and Nowak [2008] when the disagreement coefficient θ is bounded. This can be seen since the regret from Corollary 2 falls as a function of the number of queries at a rate of $\tilde{O}(q_m^{-\frac{1}{2(1-\omega)}} \log(|\mathcal{H}|/\delta))$ after m epochs, where q_m is the number of label queries. This is indeed optimal according to the lower bounds of Castro and Nowak [2008], after recalling that $\omega = 1/\kappa$ in their results. Once again, the corollary highlights our improvements on top of IWAL, which does not attain this optimal label complexity.

These results, while strong, still do not completely capture the performance of our method. Indeed the proofs of these results are entirely based on the fact that we do not query outside the disagreement region, a property shared by the previous Oracular CAL algorithm [Hsu, 2010]. Indeed we only improve upon that result as we use more refined error bounds to define the disagreement region. However, such analysis completely ignores the fact that we construct a rather non-trivial query probability function on the disagreement region, as opposed to using any constant probability of querying over this entire region. This gives our algorithm the ability to query much more rarely even over the disagreement region, if the queries do not provide much information regarding the optimal hypothesis h^* . The next section illustrates an example where this gain can be quantified.

4.2.2 Improved label complexity for a hard problem instance

We now present an example where the label complexity of Algorithm 1 is significantly smaller than both IWAL and Oracular CAL by virtue of rarely querying in the disagreement region. The example considers a distribution and a classifier space with the following structure: (i) for most examples a single good classifier predicts differently from the remaining classifiers (ii) on a few examples half the classifiers predict one way and half the other. In the first case, little advantage is gained from a label because it provides evidence against only a single classifier. ACTIVE COVER queries over the disagreement region with a probability close to P_{\min} in case (i) and probability 1 in case (ii), while others query with probability $\Omega(1)$ everywhere implying $\mathcal{O}(\sqrt{n})$ times more queries.

Concretely, we consider the following binary classification problem. Let \mathcal{H} denote the finite classifier space (defined later), and distinguish some $h^* \in \mathcal{H}$. Let $U\{-1, 1\}$ denote the uniform distribution on $\{-1, 1\}$. The data distribution $\mathcal{D}(\mathcal{X}, \mathcal{Y})$ and the classifiers are defined jointly:

- With probability ϵ ,

$$y = h^*(x), \quad h(x) \sim U\{-1, 1\}, \quad \forall h \neq h^*.$$

- With probability $1 - \epsilon$,

$$\begin{aligned} y &\sim U\{-1, 1\}, \quad h^*(x) \sim U\{-1, 1\}, \\ h_r(x) &= -h^*(x) \text{ for some } h_r \text{ drawn uniformly at random from } \mathcal{H} \setminus h^*, \\ h(x) &= h^*(x) \quad \forall h \neq h^* \wedge h \neq h_r. \end{aligned}$$

Indeed, h^* is the best classifier because $\text{err}(h^*) = \epsilon \cdot 0 + (1 - \epsilon)(1/2) = (1 - \epsilon)/2$, while $\text{err}(h) = 1/2 \forall h \neq h^*$. This problem is hard because only a small fraction of examples contain information about h^* . Ideally we want to focus label queries on those informative examples while skipping the uninformative ones. However, algorithms like IWAL, or more generally, active learning algorithms that determine label query probabilities based on error differences between a pair of classifiers, query frequently on the uninformative examples. Let $u(h, h') := \mathbb{1}(h(x) \neq y) - \mathbb{1}(h'(x) \neq y)$ denote the error difference between two different classifiers h and h' . Let C be a random variable such that $C = 1$ for the ϵ case and $C = 0$ for the $1 - \epsilon$ case. Then it is easy to see that

$$\begin{aligned} \mathbb{E}[u(h, h') \mid C = 1] &= \begin{cases} 0, & h \neq h^*, h' \neq h^*, \\ -1/2, & h = h^*, h' \neq h^*, \\ 1/2, & h \neq h^*, h' = h^*, \end{cases} \\ \mathbb{E}[u(h, h') \mid C = 0] &= 0, \forall h \neq h'. \end{aligned}$$

Therefore, IWAL queries all the time on uninformative examples ($C = 0$).

Now let us consider the label complexity of Algorithm 1 on this problem. Let us focus on the query probability inside the $1 - \epsilon$ region, and fix it to some constant p . Let us also allow a query probability of 1 on the ϵ region. Then the left hand side in the constraint (5) for any classifier h is at most $\epsilon + P(h(X) \neq h_m(X))/p \leq \epsilon + 2/(p(|\mathcal{H}| - 1))$, since h and h_m disagree only on those points in the $1 - \epsilon$ region where one of them is picked as the disagreeing classifier h_r in the random draw. On the other hand, the RHS of the constraints is at least $\xi\tau_{m-1}\Delta_{m-1}^2 \geq \xi\text{err}(h_m, \tilde{Z}_{m-1})$, which is at least $\xi/4$ as long as ϵ is small enough and τ_m is large enough for empirical error to be close to true error. Consequently, assuming that $\epsilon \leq \xi/8$, we find that any $p \geq 16/(\xi(|\mathcal{H}| - 1))$ satisfies the constraints. Of course we also have that $p \geq P_{\min, m}$, which is $\mathcal{O}(1/\sqrt{\tau_m})$ in this case since $\overline{\text{err}}_m(h^*)$ is a constant. Consequently, for $|\mathcal{H}|$ large enough $p = P_{\min, m}$ is feasible and hence optimal for the population (OP). Since we find an approximately optimal solution based on Theorem 4, the label complexity at epoch m is $\mathcal{O}(1/\sqrt{\tau_m})$. Summing things up, it can then be checked easily that we make $\mathcal{O}(\sqrt{n})$ queries over n examples, a factor of \sqrt{n} smaller than baselines such as IWAL and Oracular CAL on this example.

5 Efficient implementation

In Algorithm 1, the computation of h_m is an ERM operation, which can be performed efficiently whenever an efficient passive learner is available. However, several other hurdles remain. Testing for $x \in D_m$ in the algorithm, as well as finding a solution to (OP) are considerably more challenging. The epoch schedule helps, but (OP) is still solved $\mathcal{O}(\log n)$ times, necessitating an extremely efficient solver.

Starting with the first issue, we follow Dasgupta et al. [2007] who cleverly observed that $x \in D_m$ can be efficiently determined using a single call to an ERM oracle. Specifically, to apply their method, we use the oracle to find⁶ $h' = \arg \min\{\text{err}(h, \tilde{Z}_{m-1}) \mid h \in \mathcal{H}, h(x) \neq h_m(x)\}$. It can then be argued that $x \in D_m = \text{DIS}(A_m)$ if and only if the easily-measured regret of h' (that is, $\text{reg}(h', h_m, \tilde{Z}_{m-1})$) is at most $\gamma\Delta_{m-1}$.

Solving (OP) efficiently is a much bigger challenge because, as an optimization problem, it is enormous: There is one variable $P(x)$ for every point $x \in \mathcal{X}$, one constraint (5) for each classifier h and bound constraints (6) on $P(x)$ for every x . This leads to infinitely many variables and constraints, with an ERM oracle being the only computational primitive available. Another difficulty is that (OP) is defined in terms of the true expectation with respect to the example distribution $\mathbb{P}_{\mathcal{X}}$, which is unavailable.

In the following we first demonstrate how to efficiently solve (OP) assuming access to the true expectation $\mathbb{E}_{\mathcal{X}}[\cdot]$, and then discuss a relaxation that uses expectation over samples. For the ease of exposition, we recall the shorthand $\mathcal{I}_h^m(x) = \mathbb{1}(h(x) \neq h_m(x) \wedge x \in D_m)$ from earlier.

⁶We only have access to an *unconstrained* oracle. But that is adequate to solve with one constraint. See Appendix F of [Karampatziakis and Langford, 2011] for details.

Algorithm 2 Coordinate ascent algorithm to solve (OP)

input Accuracy parameter $\varepsilon > 0$. **initialize** $\lambda \leftarrow \mathbf{0}$.

- 1: **loop**
 - 2: Rescale: $\lambda \leftarrow s \cdot \lambda$ where $s = \arg \max_{s \in [0,1]} \mathcal{D}(s \cdot \lambda)$.
 - 3: Find $\bar{h} = \arg \max_{h \in \mathcal{H}} \mathbb{E}_X \left[\frac{\mathcal{I}_h^m(X)}{P_\lambda(X)} \right] - b_m(h)$.
 - 4: **if** $\mathbb{E}_X \left[\frac{\mathcal{I}_{\bar{h}}^m(X)}{P_\lambda(X)} \right] - b_m(\bar{h}) \leq \varepsilon$ **then**
 - 5: **return** λ
 - 6: **else**
 - 7: Update $\lambda_{\bar{h}}$ as $\lambda_{\bar{h}} \leftarrow \lambda_{\bar{h}} + 2 \frac{\mathbb{E}_X[\mathcal{I}_{\bar{h}}^m(X)/P_\lambda(X)] - b_m(\bar{h})}{\mathbb{E}_X[\mathcal{I}_{\bar{h}}^m(X)/q_\lambda(X)^3]}$.
 - 8: **end if**
 - 9: **end loop**
-

5.1 Solving (OP) with the true expectation

The main challenge here is that the optimization variable $P(x)$ is of infinite dimension. We deal with this difficulty using Lagrange duality, which leads to a dual representation of $P(x)$ in terms of a set of classifiers found through successive calls to an ERM oracle. As will become clear shortly, each of these classifiers corresponds to the most violated variance constraint (5) under some intermediate query probability function. Thus at a high level, our strategy is to expand the set of classifiers for representing $P(x)$ until the amount of constraint violation gets reduced to an acceptable level.

We start by eliminating the bound constraints using barrier functions. Notice that the objective $\mathbb{E}_X[1/(1 - P(x))]$ is already a barrier at $P(x) = 1$. To enforce the lower bound (6), we modify the objective to

$$\mathbb{E}_X \left[\frac{1}{1 - P(X)} \right] + \mu^2 \mathbb{E}_X \left[\frac{\mathbb{1}(X \in D_m)}{P(X)} \right], \quad (12)$$

where μ is a parameter chosen momentarily to ensure $P(x) \geq P_{\min, m}$ for all $x \in D_m$. Thus, the modified goal is to minimize (12) over non-negative P subject only to (5).

We solve the problem in the dual where we have a large but finite number of optimization variables, and efficiently maximize the dual using coordinate ascent with access to an ERM oracle over \mathcal{H} . Let $\lambda_h \geq 0$ denote the Lagrange multiplier for the constraint (5) for classifier h . Then for any λ , we can minimize the Lagrangian

$$\mathcal{L}(P, \lambda) := \mathbb{E}_X \left[\frac{1}{1 - P(X)} \right] + \mu^2 \mathbb{E}_X \left[\frac{\mathbb{1}(X \in D_m)}{P(X)} \right] - \sum_{h \in \mathcal{H}} \lambda_h \left(b_m(h) - \mathbb{E}_X \left[\frac{\mathbb{1}(h(X) \neq h_m(X) \wedge X \in D_m)}{P(X)} \right] \right) \quad (13)$$

over each primal variable $P(x) \in [0, 1]$ yielding the solution.

$$P_\lambda(x) = \frac{\mathbb{1}(x \in D_m) q_\lambda(x)}{1 + q_\lambda(x)}, \quad \text{where } q_\lambda(x) = \sqrt{\mu^2 + \sum_{h \in \mathcal{H}} \lambda_h \mathcal{I}_h^m(x)}. \quad (14)$$

To see this, pick any \tilde{P} satisfying $\tilde{P}(x) \in [0, 1]$ for all $x \in \mathcal{X}$ and consider the difference in the Lagrangians evaluated at \tilde{P} and P_λ :

$$\begin{aligned} \mathcal{L}(\tilde{P}, \lambda) - \mathcal{L}(P_\lambda, \lambda) &= \mathbb{E}_X \left[\mathbb{1}(X \notin D_m) \left(\frac{1}{1 - \tilde{P}(X)} - 1 \right) \right] \\ &\quad + \mathbb{E}_X \left[\mathbb{1}(X \in D_m) \left(\frac{1}{1 - \tilde{P}(X)} + \frac{\mu^2 + \sum_{h \in \mathcal{H}} \lambda_h \mathcal{I}_h^m(x)}{\tilde{P}(X)} - (1 + q_\lambda(X))^2 \right) \right]. \end{aligned}$$

The first term is non-negative because $\tilde{P}(x) \in [0, 1]$. For the second term, notice that

$$P_\lambda(x) = \arg \min_{0 \leq v \leq 1} \mathbb{1}(x \in D_m) \left(\frac{1}{1-v} + \frac{\mu^2 + \sum_{h \in \mathcal{H}} \lambda_h \mathcal{I}_h^m(x)}{v} \right)$$

and that the minimum function value is exactly $\mathbb{1}(x \in D_m)(1 + q_\lambda(x))^2$. Hence the second term is also non-negative.

Clearly, $\mu/(1 + \mu) \leq P_\lambda(x) \leq 1$ for all $x \in D_m$, so all the bound constraints (6) in (OP) are satisfied if we choose $\mu = 2P_{\min, m}$. Plugging the solution P_λ into the Lagrangian, we obtain the dual problem of maximizing the dual objective

$$\mathcal{D}(\lambda) = \mathbb{E}_X [\mathbb{1}(X \in D_m)(1 + q_\lambda(X))^2] - \sum_{h \in \mathcal{H}} \lambda_h b_m(h) + C_0 \quad (15)$$

over $\lambda \geq 0$. The constant C_0 is equal to $1 - \Pr(D_m)$ where $\Pr(D_m) = \Pr(X \in D_m)$. An algorithm to approximately solve this problem is presented in Algorithm 2. The algorithm takes a parameter $\varepsilon > 0$ specifying the degree to which all of the constraints (5) are to be approximated. Since \mathcal{D} is concave, the rescaling step can be solved using a straightforward numerical line search. The main implementation challenge is in finding the most violated constraint (Step 3). Fortunately, this step can be reduced to a single call to an ERM oracle. To see this, note that the constraint violation on classifier h can be written as

$$\begin{aligned} \mathbb{E}_X \left[\frac{\mathcal{I}_h^m(X)}{P(X)} \right] - b_m(h) &= \mathbb{E}_X \left[\mathbb{1}(X \in D_m) \left(\frac{1}{P(X)} - 2\alpha^2 \right) \mathbb{1}(h(X) \neq h_m(X)) \right] \\ &\quad - 2\beta^2 \gamma \tau_{m-1} \Delta_{m-1} (\text{err}(h, \tilde{Z}_{m-1}) - \text{err}(h_m, \tilde{Z}_{m-1})) - \xi \tau_{m-1} \Delta_{m-1}^2. \end{aligned}$$

The first term of the right-hand expression is the risk (classification error) of h in predicting samples labeled according to h_m with importance weights of $1/P(x) - 2\alpha^2$ if $x \in D_m$ and 0 otherwise; note that these weights may be positive or negative. The second term is simply the scaled risk of h with respect to the actual labels. The last two terms do not depend on h . Thus, given access to \mathbb{P}_X (or samples approximating it, discussed shortly), the most violated constraint can be found by solving an ERM problem defined on the labeled samples in \tilde{Z}_{m-1} and samples drawn from \mathbb{P}_X labeled by h_m , with appropriate importance weights detailed in Appendix F.1.

When all primal constraints are approximately satisfied, the algorithm stops. Consequently, we can execute each step of Algorithm 2 with one call to an appropriately defined ERM oracle, and approximate primal feasibility is guaranteed when the algorithm stops. More specifically, we can prove the following guarantee on the convergence of the algorithm.

Theorem 3. *When run on the m -th epoch, Algorithm 2 has the following guarantees.*

1. It halts in at most $\frac{\Pr(D_m)}{8P_{\min, m}^3 \varepsilon^2}$ iterations.
2. The solution $\hat{\lambda} \geq \mathbf{0}$ it outputs has bounded ℓ_1 norm: $\|\hat{\lambda}\|_1 \leq \Pr(D_m)/\varepsilon$.
3. The query probability function $P_{\hat{\lambda}}$ satisfies:

- The variance constraints (5) up to an additive factor of ε , i.e.,

$$\forall h \in \mathcal{H} \quad \mathbb{E}_X \left[\frac{\mathbb{1}(h(x) \neq h_m(x) \wedge x \in D_m)}{P_{\hat{\lambda}}(X)} \right] \leq b_m(h) + \varepsilon,$$

- The simple bound constraints (6) exactly,
- Approximate primal optimality:

$$\mathbb{E}_X \left[\frac{1}{1 - P_{\hat{\lambda}}(X)} \right] \leq f^* + 4P_{\min, m} \Pr(D_m), \quad (16)$$

where f^* denotes the optimal value of (OP), i.e.,

$$\begin{aligned} f^* &:= \inf_P \mathbb{E}_X \left[\frac{1}{1 - P(X)} \right] \\ &\text{s.t. } P \text{ satisfying (5) and (6)} \end{aligned} \quad (17)$$

That is, we find a solution with small constraint violation to ensure generalization, and a small objective value to be label efficient. If ε is set to $\xi\tau_{m-1}\Delta_{m-1}^2$, an amount of constraint violation tolerable in our analysis, the number of iterations in Theorem 3 varies between $\mathcal{O}(\tau_{m-1}^{3/2})$ and $\mathcal{O}(\tau_{m-1}^2)$ as the $\text{err}(h_m, \tilde{Z}_{m-1})$ varies between a constant and $\mathcal{O}(1/\tau_{m-1})$. The theorem is proved in Appendix F.2.

5.2 Solving (OP) with expectation over samples

So far we considered solving (OP) defined on the unlabeled data distribution $\mathbb{P}_{\mathcal{X}}$, which is not available in practice. A simple and natural substitute for $\mathbb{P}_{\mathcal{X}}$ is an i.i.d. sample drawn from it. Here we show that solving a properly-defined sample variant of (OP) leads to a solution to the original (OP) with similar guarantees as in Theorem 3.

More specifically, we define the following sample variant of (OP). Let S be a large sample drawn i.i.d. from $\mathbb{P}_{\mathcal{X}}$, and (OP_S) be the same as (OP) except with all population expectations replaced by empirical expectations taken with respect to S . Now for any $\varepsilon \geq 0$, define $(\text{OP}_{S,\varepsilon})$ to be the same as (OP_S) except that the variance constraints (5) are relaxed by an additive slack of ε .

Every time ACTIVE COVER needs to solve (OP) (Step 5 of Algorithm 1), it draws a fresh unlabeled i.i.d. sample S of size u from $\mathbb{P}_{\mathcal{X}}$, which can be done easily in a streaming setting by collecting the next u examples. It then applies Algorithm 2 to solve $(\text{OP}_{S,\varepsilon})$ with accuracy parameter ε . Note that this is different from solving (OP_S) with accuracy parameter 2ε . We establish the following convergence guarantees.

Theorem 4. *Let S be an i.i.d. sample of size u from $\mathbb{P}_{\mathcal{X}}$. When run on the m -th epoch for solving $(\text{OP}_{S,\varepsilon})$ with accuracy parameter ε , Algorithm 2 satisfies the following.*

1. *It halts in at most $\frac{\widehat{\text{Pr}}(D_m)}{8P_{\min,m}^3\varepsilon^2}$ iterations, where $\widehat{\text{Pr}}(D_m) := \sum_{X \in S} \mathbb{1}(X \in D_m)/u$.*
2. *The solution $\hat{\lambda} \geq \mathbf{0}$ it outputs has bounded ℓ_1 norm: $\|\hat{\lambda}\|_1 \leq \widehat{\text{Pr}}(D_m)/\varepsilon$.*
3. *If $u \geq \mathcal{O}((1/(P_{\min,m}\varepsilon)^4 + \alpha^4/\varepsilon^2) \log(|\mathcal{H}|/\delta))$, then with probability $\geq 1 - \delta$, the query probability function $P_{\hat{\lambda}}$ satisfies:*
 - *All constraints of (OP) except with an additive slack of 2.5ε in the variance constraints (5),*
 - *Approximate primal optimality:*

$$\mathbb{E}_X \left[\frac{1}{1 - P_{\hat{\lambda}}(X)} \right] \leq f^* + 8P_{\min,m}\text{Pr}(D_m) + (2 + 4P_{\min,m})\varepsilon,$$

where f^* is the optimal value of (OP) defined in (17).

The proof is in Appendix F.3. Intuitively, the optimal solution P^* to (OP) is also feasible in $(\text{OP}_{S,\varepsilon})$ since satisfying the population constraints leads to approximate satisfaction of sample constraints. Since our solution $P_{\hat{\lambda}}$ is approximately optimal for $(\text{OP}_{S,\varepsilon})$ (this is essentially due to Theorem 3), this means that the sample objective at $P_{\hat{\lambda}}$ is not much larger than P^* . We now use a concentration argument to show that this guarantee holds also for the population objective with slightly worse constants. The approximate constraint satisfaction in (OP) follows by a similar concentration argument. Our proofs use standard concentration inequalities along with Rademacher complexity to provide uniform guarantees for all vectors λ with bounded ℓ_1 norm.

The first two statements, finite convergence and boundedness of $\|\hat{\lambda}\|_1$, are identical to Theorem 3 except $\text{Pr}(D_m)$ is replaced by $\widehat{\text{Pr}}(D_m)$. When ε is set properly, i.e., to be $\xi^2\tau_{m-1}\Delta_{m-1}^2$, the number of unlabeled examples u in the third statement varies between $\mathcal{O}(\tau_{m-1}^2)$ and $\mathcal{O}(\tau_{m-1}^4)$ as the $\text{err}(h_m, \tilde{Z}_{m-1})$ varies between a constant and $\mathcal{O}(1/\tau_{m-1})$. The third statement shows that with enough unlabeled examples, we can get a query probability function almost as good as the solution to the population problem (OP).

Algorithm 3 ONLINE ACTIVE COVER

input: cover size l , parameters c_0, α and β_{scale} .

- 1: Initialize online importance weighted minimization oracles $\{O_t\}_{t=0}^l$, each controlling a classifier and some associated weights $\{(h_t, \lambda_t, \nu_t, \omega_t)\}_{t=1}^l$ with all weights initialized to 0.
- 2: For the first three examples $\{X_i\}_{i=1}^3$, query the labels $\{Y_i\}_{i=1}^3$.
- 3: Let $h := O_0(\{(X_i, Y_i, 1)\}_{i=1}^3)$.
- 4: Get error estimate e_2 from O_0 and compute $P_{\min,3}$.
- 5: Let $(X, Y^*, \tilde{Y}, W) := (X_3, Y_3, h(X_3), 1)$. Set $\beta := (\sqrt{\alpha/c_0})/\beta_{scale}$.
- 6: **for** $i = 4, \dots, n$, **do**
- 7: Update the ERM, the error estimate and the threshold

$$\begin{aligned} h &:= O_0((X, Y^*, W)), \\ e_{i-1} &:= \frac{(i-2)e_{i-2} + \mathbf{1}(\tilde{Y} \neq Y^*)W}{i-1}, \\ \hat{\Delta}_{i-1} &:= \sqrt{c_0 e_{i-1}/(i-1)} + \max(2\alpha, 4)c_0 \log(i-1)/(i-1). \end{aligned}$$

- 8: **for** $t = 1, \dots, l$ **do**
- 9: Compute $p_t := q_t/(1 + q_t)$, where $q_t := \sqrt{(2P_{\min,i-1})^2 + \sum_{t' < t} \lambda_{t'} \mathbf{1}(h_{t'}(X) \neq \tilde{Y})}$.
- 10: Set up the cost of predicting $y \in \{1, -1\}$, the target label and the importance weight:

$$\mathbf{c}_y := 2\beta^2(i-2)\hat{\Delta}_{i-2}\mathbf{1}(y \neq Y^*)W + \left(2\alpha^2 - \frac{1}{p_t}\right)\mathbf{1}(X \in D_{i-1} \wedge y \neq \tilde{Y}), \quad (18)$$

$$\begin{aligned} Y_t &:= \arg \min_y \mathbf{c}_y, \\ W_t &:= |\mathbf{c}_1 - \mathbf{c}_{-1}|. \end{aligned}$$

- 11: Update the t -th classifier in the cover and its associated weights:

$$\begin{aligned} h_t &:= O_t((X, Y_t, W_t)), \\ \nu_t &:= \max\left(\nu_t + 2(\mathbf{c}_{\tilde{Y}} - \mathbf{c}_{h_t(X)}), 0\right), \end{aligned} \quad (19)$$

$$\omega_t := \omega_t + \mathbf{1}(h_t(X) \neq \tilde{Y} \wedge X \in D_{i-1})/q_t^3, \quad (20)$$

$$\lambda_t := \frac{\nu_t}{\omega_t} \mathbf{1}((\nu_t, \omega_t) \neq (0, 0)). \quad (21)$$

- 12: **end for**
 - 13: Receive new data point X_i and let $\tilde{Y} := h(X_i)$.
 - 14: Compute $P_{\min,i} := \min((\sqrt{(i-1)e_{i-1}} + \log(i-1))^{-1}, 1/2)$.
 - 15: **if** $X_i \in D_i := \text{DIS}(A_i)$, **then**
 - 16: Compute $P_i := q/(1 + q)$, where $q := \sqrt{(2P_{\min,i})^2 + \sum_{t=1}^l \lambda_t \mathbf{1}(h_t(X_i) \neq \tilde{Y})}$.
 - 17: Draw $Q \sim \text{Bernoulli}(P)$.
 - 18: **if** $Q = 1$ **then**
 - 19: Query Y_i and set $(X, Y^*, W) := (X_i, Y_i, 1/P_i)$.
 - 20: **else**
 - 21: Set $(X, Y^*, W) := (X_i, 1, 0)$.
 - 22: **end if**
 - 23: **else**
 - 24: Set $(X, Y^*, W) := (X_i, h(X_i), 1)$.
 - 25: **end if**
 - 26: **end for**
-

6 Experiments with Agnostic Active Learning

While AC is efficient in the number of ERM oracle calls, it needs to store all past examples, resulting in large space complexity. As Theorem 3 suggests, the query probability function (14) may need as many as $\mathcal{O}(\tau_i^2)$ classifiers, further increasing storage demand. In Section 6.1 we discuss a scalable online approximation to ACTIVE COVER, ONLINE ACTIVE COVER (OAC), which we implemented and tested empirically with the setup in Section 6.2. Experimental results and discussions are in Section 6.3.

6.1 Online Active Cover (OAC)

Algorithm 3 gives the online approximation that we implemented, which uses an epoch schedule of $\tau_i = i$, assigning every new example to a new epoch.

To explain the connections between Algorithms 1 (AC) and 3 (OAC), we start with the update of the ERM classifier and thresholds, corresponding to Step 1 of AC and Step 7 of OAC. Instead of batch ERM oracles, OAC invokes online importance weighted ERM oracles that are stateful and process examples in a streaming fashion without the need to store them. The specific importance weighted oracle we use is a reduction to online importance-weighted logistic regression [Karampatziakis and Langford, 2011] implemented in Vowpal Wabbit (VW). Y^* denotes the actual label that is used to update the ERM classifier and, depending on the query decision (Steps 9 to 14), can be a queried label, a predicted label by the previous ERM classifier, or a dummy label of 1 associated with an importance weight of zero. The error variable e_{i-1} keeps track of the *progressive validation loss*, which is a better estimate of the true classification error than the training error [Blum et al., 1999, Cesa-Bianchi et al., 2004].

Instead of computing the query probability function by solving a batch optimization problem as in Step 5 of AC, OAC maintains a fixed number l of classifiers that are intended to be a cover of the set of good classifiers. On every new example, this cover undergoes a sequence of online, importance weighted updates (Steps 8 to 12 of OAC), which are meant to approximate the coordinate ascent steps in Algorithm 2. The importance structure (18) is derived from (67), accounting for the fact that the algorithm simply uses the incoming stream of examples to estimate $\mathbb{E}_X[\cdot]$ rather than a separate unlabeled sample. The same approximation is also present in the updates (19) and (20), which are online estimates of the numerator and the denominator of the additive coordinate update in Step 7 of Algorithm 2. Because (19) is an online estimate, we need to explicitly enforce non-negativity. Note that (19) has the following straightforward interpretation: if the prediction of h_t , the t -th classifier in the cover, is the same as that of the ERM, the weight associated with h_t will not change. Otherwise, the weight of h_t increases/decreases when its prediction has a smaller/larger cost than the prediction of the ERM.

To further clarify the effect of (18), we perform the following case analysis:

- If $X_{i-1} \notin D_{i-1}$, then for all $t \in \{1, \dots, l\}$,

$$(\mathbf{c}_{\tilde{Y}}, \mathbf{c}_{-\tilde{Y}}) = (0, 2\beta^2(i-2)\widehat{\Delta}_{i-2}),$$

so $Y_t = \tilde{Y}$. This means that all the classifiers in the cover are trained with the predicted label when the example is outside of the disagreement region.

- Otherwise, the costs for the t -th classifier in the cover are:

$$(\mathbf{c}_{\tilde{Y}}, \mathbf{c}_{-\tilde{Y}}) = \begin{cases} (0, 2\alpha^2 - 1/p_t), & Q = 0, \text{ i.e., the true label was not queried,} \\ (0, 2\alpha^2 - 1/p_t + 2\beta^2(i-2)\widehat{\Delta}_{i-2}/P_{i-1}), & Q = 1, \tilde{Y} = Y_{i-1}, \\ (2\beta^2(i-2)\widehat{\Delta}_{i-2}/P_{i-1}, 2\alpha^2 - 1/p_t), & Q = 1, \tilde{Y} \neq Y_{i-1}. \end{cases}$$

In the first case, if $p_t > 1/(2\alpha^2)$, i.e., the query probability based on the previous $t-1$ classifiers in the cover is large enough, then $\mathbf{c}_{-\tilde{Y}} > 0$ and the t -th classifier will be trained to agree with the predicted label. Otherwise, the t -th classifier will be trained to disagree with the predicted label, thereby increasing the query probability. In the second case, the true label Y_{i-1} was queried and found to be the same as the predicted label, so unless p_t is very small, the t -th classifier will not be trained to disagree with the ERM h . In the third case, the cost associated with the predicted label \tilde{Y} is always positive, so the true label Y_{i-1} will be preferred unless p_t or α is fairly large.

Finally, Steps 9 to 14 of AC and Steps 13 to 25 of OAC perform the querying of labels. As pointed out in Section 5, the test in Step 15 of OAC is done via an *online technique* detailed in Appendix F of Karampatziakis and Langford [2011].

6.2 Experiment Setting

We conduct an empirical comparison of OAC with the following active learning algorithms.

- IWAL_0 : Algorithm 1 of Beygelzimer et al. [2010], which performs importance-weighted sampling of labels and maintains an unbiased estimate of classification error. On every new example, it queries the true label with probability 1 if the error difference G_k (Step 2 in Algorithm 1 of Beygelzimer et al. [2010]) is smaller than the threshold

$$\sqrt{\frac{C_0 \log k}{k-1}} + \frac{C_0 \log k}{k-1}, \quad (22)$$

where C_0 is a hyper-parameter. Otherwise, the query probability is a decreasing function of G_k .

- IWAL_1 : A slight modification of IWAL_0 that uses a more aggressive, error-dependent threshold:

$$\sqrt{\frac{C_0 \log k}{k-1} e_{k-1}} + \frac{C_0 \log k}{k-1}, \quad (23)$$

where e_{k-1} is the importance-weighted error estimate after the algorithm processes $k-1$ examples.

- ORA-IWAL_0 : An Oracular-CAL [Hsu, 2010] style variant of IWAL_0 that queries the label of a new example with probability 1 if the error difference G_k (see IWAL_0 above) is smaller than the threshold (22). Otherwise, it uses the predicted label by the current ERM classifier.
- ORA-IWAL_1 : An Oracular-CAL [Hsu, 2010] style variant of IWAL_1 that resembles ORA-IWAL_0 except that it uses the error-dependent threshold (23). Note that the error estimate e_{k-1} now uses both the queried labels and predicted labels, and is no longer unbiased. We remark that a theoretical analysis of this algorithm has recently been given by Zhang [2015]. In fact, it is almost identical to an Oracular-CAL [Hsu, 2010] style variant of Algorithm 3 that uses a query probability P_i of 1 whenever the disagreement test in Step 15 of Algorithm 3 returns true, except that its threshold (23) is slightly different from the one used by Algorithm 3 (Step 7).
- PASSIVE : Passive learning using all the labels of incoming examples up to some label budget.

We implemented these algorithms in Vowpal Wabbit⁷ (VW), a fast learning system using online convex optimization, which fits nicely with the streaming active learning setting. We performed experiments on 22 binary classification datasets with varying sizes (10^3 to 10^6) and diverse feature characteristics. Details about the datasets are in Appendix G.1. Our goals are:

1. Investigating the maximal test error improvement per label query achievable by different algorithms;
2. Comparing different algorithms when each uses the best fixed hyper-parameter setting.

We thus consider the following experiment setting. To simulate the streaming setting, we randomly permuted the datasets, ran the active learning algorithms through the first 80% of data, and evaluated the learned classifiers on the remaining 20%. We repeated this process 9 times to reduce variance due to random permutation. For each active learning algorithm, we obtain the test error rates of classifiers trained at doubling numbers of label queries starting from 10 to 10240. Formally, let $\text{error}_{a,p}(d, j, q)$ denote the test error of the classifier returned by algorithm a using hyper-parameter setting p on the j -th permutation of dataset d under a label budget of $10 \cdot 2^{(q-1)}$, $1 \leq q \leq 11$, and $\text{query}_{a,p}(d, j, q)$ denote the actual number of label queries made. Note that under the same label budget, OAC and the Oracular-CAL variants may use more example-label pairs for learning than IWAL_0 and IWAL_1 because the former algorithms use predicted labels. Also note that $\text{query}_{a,p}(d, j, q) < 10 \cdot 2^{(q-1)}$ when algorithm a reaches the end of

⁷<http://hunch.net/~vw/>.

Table 1: Summary of performance metrics

	OAC	IWAL ₀	IWAL ₁	ORA-IWAL ₀	ORA-IWAL ₁	PASSIVE
AUC-GAIN*	0.1611	0.1466	0.1552	0.1586	0.1549	0.0950
AUC-GAIN	0.0722	0.0863	0.0755	0.0945	0.0807	0.0718

the training data before hitting the q -th label budget. To evaluate the overall performance of an algorithm, we consider the area under its curve of test error against log number of label queries:

$$\text{AUC}_{a,p}(d, j) = \frac{1}{2} \sum_{q=1}^{10} \left(\text{error}_{a,p}(d, j, q+1) + \text{error}_{a,p}(d, j, q) \right) \cdot \left(\log_2 \frac{\text{query}_{a,p}(d, j, q+1)}{\text{query}_{a,p}(d, j, q)} \right). \quad (24)$$

A good active learning algorithm has a small value of AUC, which indicates that the test error decreases quickly as the number of label queries increases. We use a logarithmic scale for the number of label queries to focus on the performance under few label queries where active learning is the most relevant. More details about hyper-parameters are in Appendix G.2.

For the first goal, we compare the performances of different algorithms optimized on a per dataset basis. More specifically, we measure of the performance of algorithm a by the following aggregated metric:

$$\text{AUC-GAIN}^*(a) := \text{mean}_d \max_p \text{median}_{1 \leq j \leq 9} \left\{ \frac{\text{AUC}_{base}(d, j) - \text{AUC}_{a,p}(d, j)}{\text{AUC}_{base}(d, j)} \right\}, \quad (25)$$

where AUC_{base} denotes the AUC of PASSIVE using a default hyper-parameter setting, corresponding to a learning rate of 0.4 (see Appendix G.2 for more details). In this metric, we first take the median of the relative test error improvements over the PASSIVE baseline, which gives a representative performance among the 9 random permutations, and then take the maximum of the medians over hyper-parameters, and finally average over datasets. This metric shows the maximal gain each algorithm achieves with the best hyper-parameter setting for each dataset.

In practice it is difficult to select active learning hyper-parameters on a per-dataset basis because labeled validation data are not available. With a variety of classification datasets, a reasonable alternative might be to look for the single hyper-parameter setting that performs the best on average across datasets, thereby reducing over-fitting to any individual dataset, and compare different algorithms under such fixed parameter settings. We thus consider the following metric:

$$\text{AUC-GAIN}(a) := \max_p \text{mean}_d \text{median}_{1 \leq j \leq 9} \left\{ \frac{\text{AUC}_{base}(d, j) - \text{AUC}_{a,p}(d, j)}{\text{AUC}_{base}(d, j)} \right\}, \quad (26)$$

which first averages the median improvements over datasets and then maximizes over hyper-parameter settings.

6.3 Results and Discussions

Table 1 gives a summary of the performances of different algorithms, measured by the two metrics AUC-GAIN* (25) and AUC-GAIN (26). When using hyper-parameters optimized on a per-dataset basis (top row in Table 1), OAC achieves the largest improvement over the PASSIVE baseline, with ORA-IWAL₀ achieving almost the same improvement and other active learning algorithms improving slightly less. When using the best fixed hyper-parameter setting across all datasets (bottom row in Table 1), all active learning algorithms achieve less improvement compared with PASSIVE, which achieves a 7% improvement with the best fixed learning rate. ORA-IWAL₀ performs the best, achieving a 9% improvement, while IWAL₀ and ORA-IWAL₁ achieve more than 8%. Both IWAL₁ and OAC achieve around 7.5% improvements, slightly better than PASSIVE. This suggests that careful tuning of hyper-parameters is critical for OAC and an important direction for future work.

To describe the behaviors of different algorithms in more details, we plot the relative improvement in test error against number of label queries. In Figure 1(a), for each algorithm a we identify the best fixed hyper-parameter setting

$$p^* := \arg \max_p \text{mean}_d \text{median}_{1 \leq j \leq 9} \left\{ \frac{\text{AUC}_{base}(d, j) - \text{AUC}_{a,p}(d, j)}{\text{AUC}_{base}(d, j)} \right\}, \quad (27)$$

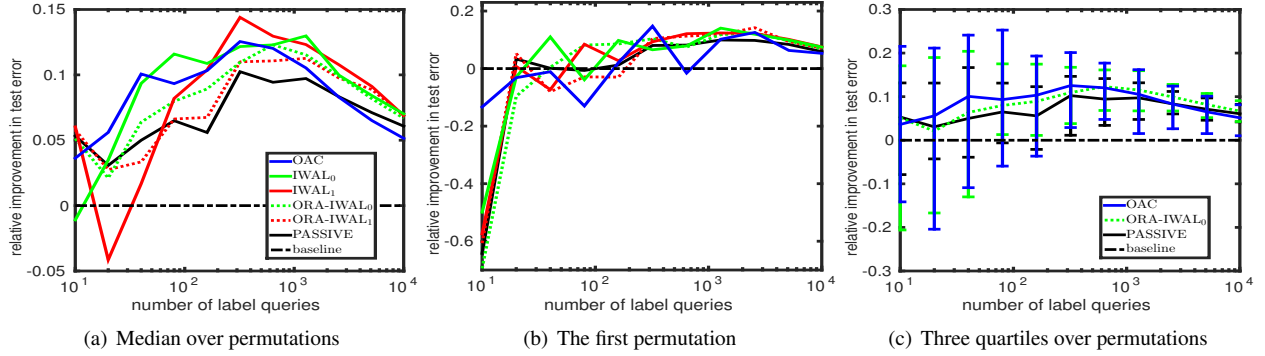


Figure 1: Relative improvement in test error v.s. number of label queries under the best fixed hyper-parameter setting across datasets. Results are averaged over all datasets.

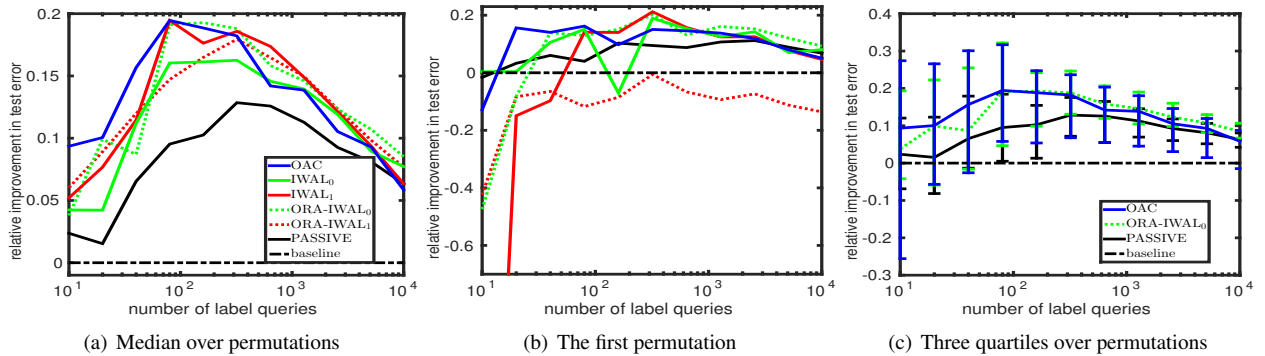


Figure 2: Relative improvement in test error v.s. number of label queries under the hyper-parameter settings optimized on a per dataset basis. Results are averaged over all datasets.

and plot the relative test error improvement by a using p^* averaged across all datasets at the 11 label budgets:

$$\left\{ \left(10 \cdot 2^{(q-1)}, \text{mean median}_{d, 1 \leq j \leq 9} \left\{ \frac{\text{error}_{base}(d, j, q) - \text{error}_{a, p^*}(d, j, q)}{\text{error}_{base}(d, j, 5)} \right\} \right) \right\}_{q=1}^{11}. \quad (28)$$

The two IWAL algorithms start off badly at small numbers of label queries, but outperform other algorithms after 100-or-so label queries. OAC performs better than the two Oracular-CAL algorithms until a few hundred label queries, but becomes worse afterwards.

To give a sense of the variation due to random permutation, we plot in Figure 1(b) average results on the first permutation of each dataset, i.e., instead of taking the median in (28), we simply took results from the first permutation. Figures 1 and 1(b) suggest that variation due to permuting the data is quite large, especially for the two Oracular-CAL algorithms and IWAL₁. Figure 1(c) gives another view that shows variation for OAC, ORA-IWAL₀, and PASSIVE: in addition to the median improvement, we also plot error bars corresponding to the first and the third quartiles of the relative improvement over random permutations, i.e., (28) with median replaced by the two quartiles, respectively.

In Figures 2(a) to 2(c), we plot results obtained by each algorithm a using the best hyper-parameter setting for each dataset d :

$$p_d^* := \arg \max_p \text{median}_{1 \leq j \leq 9} \left\{ \frac{\text{AUC}_{base}(d, j) - \text{AUC}_{a, p}(d, j)}{\text{AUC}_{base}(d, j)} \right\}. \quad (29)$$

As expected, all algorithms perform better by using the best hyper-parameter setting for each dataset. Note that OAC performs the best at small numbers of label queries, but after a few hundred label queries all active learning algorithms perform quite similarly.

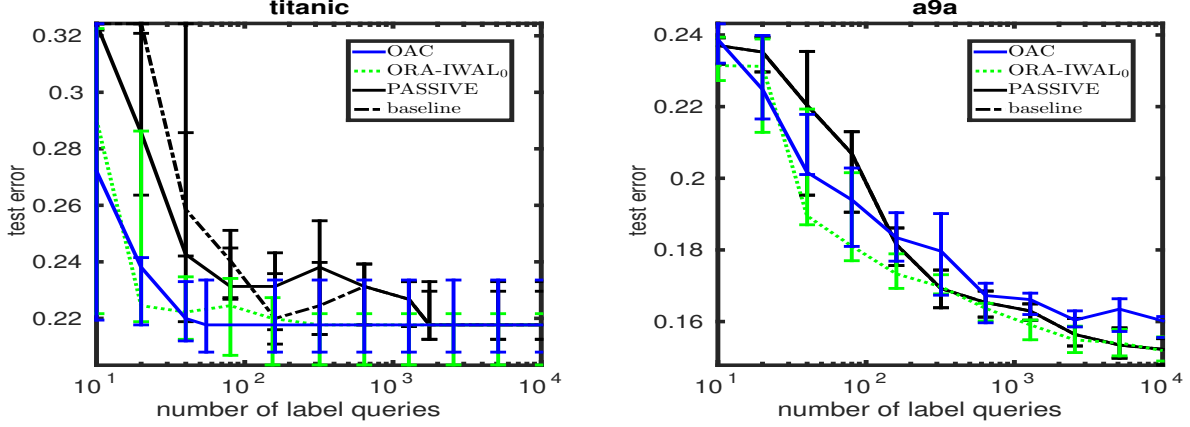


Figure 3: Test error under the best hyper-parameter setting for each dataset v.s. number of label queries

Finally in Figure 3, we show the test error rates obtained by OAC, ORA-IWAL₀, and PASSIVE against number of label queries for 2 of the 22 datasets, using the best hyper-parameter setting for each dataset. Results for all datasets and all algorithms are in Appendix G.3.

In sum, when using the best fixed hyper-parameter setting, ORA-IWAL₀ outperforms other active learning algorithms. When using the best hyper-parameter setting tuned for each dataset, OAC and ORA-IWAL₀ perform equally well and better than other algorithms.

7 Analysis of generalization ability

In this section we present the main framework and analysis for the results on the generalization properties of the ACTIVE COVER algorithm. Our analysis is broken up into several steps. We start by setting up some additional notation for the proofs. Our analysis relies on two deviation bounds for the empirical regret and the empirical error of the ERM classifier. These are obtained by appropriately applying Freedman-style concentration bounds for martingales. Both these bounds depend on the variance and range of our error and regret estimates for all classifiers $h \in \mathcal{H}$, and these quantities are controlled using the constraints (5) and (6) in the definition of the optimization problem (OP). Since our data consists of examples from different epochs, which use different query probabilities P_m , the above steps with appropriate manipulations yield bounds for the epoch m , in terms of various quantities involving the previous epochs. Theorem 1 and its corollaries are then obtained by setting up appropriate inductive claims. We make this intuition precise in the following sections.

7.1 Framework for generalization analysis

Before we can prove our main results, we recall some notations and introduce a few additional ones. We also prove some technical lemmas in this section which are used to prove our main results.

Recall the notation $\text{reg}(h, h') := \text{err}(h) - \text{err}(h')$, $h^* \in \arg \min_{h \in \mathcal{H}} \text{err}(h)$, $\text{reg}(h) := \text{reg}(h, h^*)$. Let Z_m denote the set of importance-weighted examples in \tilde{Z}_m , and the corresponding empirical error is denoted as:

$$\text{err}(h, Z_m) := \frac{1}{\tau_m} \sum_{j=1}^m \sum_{i=\tau_{j-1}+1}^{\tau_j} \left(\frac{Q_i \mathbb{1}(h(X_i) \neq Y_i \wedge X_i \in D_j)}{P_j(X_i)} \right). \quad (30)$$

Taking expectations, we define the following quantities with respect to the sequence of regions $\{D_m\}$:

$$\begin{aligned}
\text{err}_m(h) &:= \mathbb{E}_{X,Y}[\mathbb{1}(h(X) \neq Y \wedge X \in D_m)], \\
\overline{\text{err}}_m(h) &:= \frac{1}{\tau_m} \sum_{j=1}^m (\tau_j - \tau_{j-1}) \text{err}_j(h).
\end{aligned} \tag{31}$$

Intuitively, err_m captures the population error of h , restricted to only the examples in the disagreement region. This is also the expectation of the sample error restricted to the importance-weighted examples in epoch m . Averaging these quantities, we obtain $\overline{\text{err}}_m$ which is the expectation of the sample error over Z_m . Centering around the corresponding errors of h^* , we obtain the following regret terms:

$$\begin{aligned}
\text{reg}_m(h) &:= \text{err}_m(h) - \text{err}_m(h^*), \\
\overline{\text{reg}}_m(h) &:= \frac{1}{\tau_m} \sum_{j=1}^m (\tau_j - \tau_{j-1}) \text{reg}_j(h).
\end{aligned}$$

While the above quantities only concern the importance-weighted examples, it is also useful to measure error and regret terms over the entire biased sample. We define the empirical error and regret on \tilde{Z}_m as follows:

$$\begin{aligned}
\text{err}(h, \tilde{Z}_m) &:= \frac{1}{\tau_m} \sum_{j=1}^m \sum_{i=\tau_{j-1}+1}^{\tau_j} \left(\mathbb{1}(h(X_i) \neq h_j(X_i) \wedge X_i \notin D_j) + \frac{Q_i \mathbb{1}(h(X_i) \neq Y_i \wedge X_i \in D_j)}{P_j(X_i)} \right), \\
\text{reg}(h, h', \tilde{Z}_m) &:= \text{err}(h, \tilde{Z}_m) - \text{err}(h', \tilde{Z}_m),
\end{aligned}$$

and the associated expected regret:

$$\begin{aligned}
\text{reg}_m^\dagger(h, h') &:= \mathbb{E}_X[(\mathbb{1}(h(X) \neq h_m(X)) - \mathbb{1}(h'(X) \neq h_m(X)))\mathbb{1}(X \notin D_m)] + \\
&\quad \mathbb{E}_{X,Y}[(\mathbb{1}(h(X) \neq Y) - \mathbb{1}(h'(X) \neq Y))\mathbb{1}(X \in D_m)],
\end{aligned} \tag{32}$$

$$\widetilde{\text{reg}}_m(h, h') := \frac{1}{\tau_m} \sum_{j=1}^m (\tau_j - \tau_{j-1}) \text{reg}_j^\dagger(h, h'). \tag{33}$$

The quantity $\widetilde{\text{reg}}_m(h, h')$ will play quite a central role in our analysis as it is the expectation of the empirical regret of h relative to h' on our biased sample \tilde{Z}_m . We also recall the earlier notations

$$\begin{aligned}
\Delta_m &:= c_1 \sqrt{\epsilon_m \text{err}(h_{m+1}, \tilde{Z}_m)} + c_2 \epsilon_m \log \tau_m, \\
A_{m+1} &:= \{h \in \mathcal{H} \mid \text{err}(h, \tilde{Z}_m) - \text{err}(h_{m+1}, \tilde{Z}_m) \leq \gamma \Delta_m\}, \quad \text{and} \\
\Delta_m^* &:= \begin{cases} \left(c_1 \sqrt{\epsilon_m \overline{\text{err}}_m(h^*)} + c_2 \epsilon_m \log \tau_m \right), & m \geq 1. \\ \Delta_0, & m = 0. \end{cases}
\end{aligned}$$

Unless stated otherwise, we adopt the convention that in the quantities defined above, summations from 1 to m take the value of zero when $m = 0$. We use the shorthand $m(i)$ to denote the epoch containing example i . We also sometimes use the shorthand $\text{reg}(h, \tilde{Z}_m) := \text{reg}(h, h_{m+1}, \tilde{Z}_m)$, $\text{reg}_m^\dagger(h) := \text{reg}_m^\dagger(h, h^*)$, and $\widetilde{\text{reg}}_m(h) := \widetilde{\text{reg}}_m(h, h^*)$.

With the notations in place, we start with an extremely important lemma, which shows that the biased sample \tilde{Z} which we create introduces a bias in the favor of good hypotheses, overly penalizing the bad hypotheses while favorably evaluating the optimal h^* .

Lemma 1 (Favorable Bias). $\forall m \geq 1, \forall \bar{h} \in A_m, \forall h \in \mathcal{H}$, the following holds:

$$\text{reg}_m^\dagger(h, \bar{h}) \geq \text{reg}(h, \bar{h}).$$

The next key ingredient for our proofs is a deviation bound, which will be appropriately used to control the deviation of the empirical regret and error terms.

Lemma 2 (Deviation Bounds). *Pick $0 < \delta < 1/e$ such that $|\mathcal{H}|/\delta > \sqrt{192}$. With probability at least $1 - \delta$ the following holds. For all $(h, h') \in \mathcal{H}^2$ and $\forall m \geq 1$,*

$$\begin{aligned} & |\widetilde{\text{reg}}_m(h, h') - \text{reg}(h, h', \tilde{Z}_m)| \\ & \leq \sqrt{\frac{\epsilon_m}{\tau_m} \sum_{i=1}^m (\tau_i - \tau_{i-1}) \mathbb{E}_X \left[\left(\mathbb{1}(X \notin D_i) + \frac{\mathbb{1}(X \in D_i)}{P_i(X)} \right) \mathbb{1}(h(X) \neq h'(X)) \right]} \\ & \quad + \frac{\epsilon_m}{P_{\min, m}}, \end{aligned} \tag{34}$$

$$\begin{aligned} & |\text{err}(h, Z_m) - \overline{\text{err}}_m(h)| \\ & \leq \sqrt{\frac{\epsilon_m}{\tau_m} \sum_{i=1}^m (\tau_i - \tau_{i-1}) \mathbb{E}_{X, Y} \left[\frac{\mathbb{1}(X \in D_i \wedge h(X) \neq Y)}{P_i(X)} \right]} + \frac{\epsilon_m}{P_{\min, m}}, \end{aligned} \tag{35}$$

where

$$\epsilon_m := 32 \left(\frac{\log(|\mathcal{H}|/\delta) + \log \tau_m}{\tau_m} \right).$$

The lemma is obtained by applying a form of Freedman's inequality presented in Appendix A. Intuitively, the deviations are small so long as the average importance weights over the disagreement region and the minimum query probability over the disagreement region are well-behaved. This lemma also highlights why $\widetilde{\text{reg}}_m$ is a very natural quantity for our analysis, since the empirical regret on our biased sample \tilde{Z} concentrates around it.

To keep the handling of probabilities simple, we assume for the bulk of this section that the conclusions of Lemma 2 hold deterministically. The failure probability is handled once at the end to establish our main results. Let \mathcal{E} denote the event that the assertions of Lemma 2 hold deterministically, and we know that $\Pr(\mathcal{E}^C) \leq \delta$. Based on the above lemma, we obtain the following propositions for the concentration of empirical regret and error terms.

Proposition 1 (Regret concentration). *Fix an epoch $m \geq 1$. Suppose the event \mathcal{E} holds and assume that $h^* \in A_j$ for all epochs $j \leq m$.*

$$\begin{aligned} & |\text{reg}(h, h^*, \tilde{Z}_m) - \widetilde{\text{reg}}_m(h, h^*)| \\ & \leq \frac{1}{4} \widetilde{\text{reg}}_m(h) + 2\alpha \sqrt{\frac{\epsilon_m}{\tau_m} \sum_{i=1}^m (\tau_i - \tau_{i-1}) \text{reg}_i(h_i)} + 2\alpha \sqrt{3\overline{\text{err}}_m(h^*)\epsilon_m} \\ & \quad + \beta \sqrt{2\gamma\epsilon_m\Delta_m \sum_{i=1}^m (\tau_i - \tau_{i-1}) (\text{reg}(h, \tilde{Z}_{i-1}) + \text{reg}(h^*, \tilde{Z}_{i-1}))} + 4\Delta_m \end{aligned}$$

We need an analogous result for the empirical error of the ERM at each epoch.

Proposition 2 (Error concentration). *Fix an epoch $m \geq 1$. Suppose the event \mathcal{E} holds and assume that $h^* \in A_j$ for all epochs $j \leq m$.*

$$|\overline{\text{err}}_m(h^*) - \text{err}(h_{m+1}, \tilde{Z}_m)| \leq \frac{\overline{\text{err}}_m(h^*)}{2} + \frac{3\Delta_m}{2} + \text{reg}(h^*, h_{m+1}, \tilde{Z}_m).$$

We now present the proofs of our main results based on these propositions.

7.2 Proofs of main results

We prove a more general version of the theorem. Theorem 1 and its corollaries follow as consequences of this more general result.

Theorem 5. *For all epochs $m = 1, 2, \dots, M$ and all $h \in \mathcal{H}$, the following holds with probability at least $1 - \delta$:*

$$|\text{reg}(h, h^*, \tilde{Z}_m) - \widetilde{\text{reg}}_m(h, h^*)| \leq \frac{1}{2} \widetilde{\text{reg}}_m(h, h^*) + \frac{\eta}{4} \Delta_m, \quad (36)$$

$$\text{reg}(h^*, h_{m+1}, \tilde{Z}_m) \leq \frac{\eta \Delta_m}{4} \quad \text{and} \quad h^* \in A_i, \quad (37)$$

$$|\overline{\text{err}}_m(h^*) - \text{err}(h_{m+1}, \tilde{Z}_m)| \leq \frac{\overline{\text{err}}_m(h^*)}{2} + \frac{\eta}{2} \Delta_m. \quad (38)$$

The theorem is proved inductively. We first give the proof outline for this theorem, and then show how Theorem 1 and its corollaries follow.

7.2.1 Proof of Theorem 5

The theorem is proved via induction. Let us start with the base case for $m = 1$. Clearly, $A_1 = \mathcal{H} \ni h^*$, and

$$|\text{reg}(h, h^*, \tilde{Z}_1) - \widetilde{\text{reg}}_1(h, h^*)| \leq 1 \leq \eta \Delta_1 / 4,$$

since $P_{\min,1} = 1$. The conclusions for the second and third statements follow similarly. This establishes the base case. Let us now assume that the hypothesis holds for $i = 1, 2, \dots, m-1$ and we establish it for the epoch $i = m$. We start from the conclusion of Proposition 1, which yields

$$\begin{aligned} & |\text{reg}(h, h^*, \tilde{Z}_m) - \widetilde{\text{reg}}_m(h, h^*)| \\ & \leq \frac{1}{4} \widetilde{\text{reg}}_m(h) + 2\alpha \underbrace{\sqrt{\frac{\epsilon_m}{\tau_m} \sum_{i=1}^m (\tau_i - \tau_{i-1}) \text{reg}_i(h_i)}}_{\mathcal{T}_1} + \underbrace{2\alpha \sqrt{3\overline{\text{err}}_m(h^*) \epsilon_m}}_{\mathcal{T}_2} \\ & \quad + \beta \underbrace{\sqrt{2\gamma \epsilon_m \Delta_m \sum_{i=1}^m (\tau_i - \tau_{i-1}) (\text{reg}(h, \tilde{Z}_{i-1}) + \text{reg}(h^*, \tilde{Z}_{i-1})) + 4\Delta_m}}_{\mathcal{T}_3} \end{aligned}$$

We now control \mathcal{T}_1 , \mathcal{T}_2 and \mathcal{T}_3 in the sum using our inductive hypothesis and the propositions in a series of lemmas. To state the lemmas cleanly, let \mathcal{E}_m refer to the event where the bounds (36)-(38) hold at epoch m . Then we have the following lemmas. The first lemma gives a bound on \mathcal{T}_1 .

Lemma 3. *Suppose that the event \mathcal{E} holds and that the events \mathcal{E}_i hold for all epochs $i = 1, 2, \dots, m-1$. Then we have*

$$2\alpha \sqrt{\frac{\epsilon_m}{\tau_m} \sum_{i=1}^m (\tau_i - \tau_{i-1}) \text{reg}_i(h_i)} \leq \frac{\eta \Delta_m}{12} + 24\alpha^2 \epsilon_m \log \tau_m.$$

Intuitively, the lemma holds since Lemma 1 allows us to bound $\text{reg}_i(h_i)$ with $\widetilde{\text{reg}}_{i-1}(h_i)$. The latter is then controlled using the event \mathcal{E}_i . Some algebraic manipulations then yield the lemma, with a detailed proofs in Appendix C. We next present a lemma that helps us control \mathcal{T}_2 .

Lemma 4. *Suppose that the event \mathcal{E} holds and that the events \mathcal{E}_i hold for all epochs $i = 1, 2, \dots, m - 1$. Then we have*

$$2\alpha\sqrt{3\text{err}_m(h^*)\epsilon_m} \leq 2\alpha\sqrt{6\epsilon_m\text{err}(h_{m+1}, \tilde{Z}_m)} + \Delta_m + \frac{1}{4}\text{reg}(h^*, h_{m+1}, \tilde{Z}_m) + 33\alpha^2\epsilon_m.$$

The lemma follows more or less directly from Proposition 2 combined with some algebra. Finally, we present a lemma to bound \mathcal{T}_3 .

Lemma 5. *Suppose that the event \mathcal{E} holds and that the events \mathcal{E}_i hold for all epochs $i = 1, 2, \dots, m - 1$. Then we have*

$$\beta\sqrt{2\gamma\epsilon_m\Delta_m\sum_{i=1}^m(\tau_i - \tau_{i-1})(\text{reg}(h, \tilde{Z}_{i-1}) + \text{reg}(h^*, \tilde{Z}_{i-1}))} \leq \frac{1}{4}\widetilde{\text{reg}}_m(h, h^*) + \frac{7\eta\Delta_m}{72}.$$

The $\text{reg}(h^*, h_i, \tilde{Z}_{i-1})$ terms in the lemma are bounded directly due to the event \mathcal{E}_i . For the second term, we observe that the empirical regret of h relative to h_i is not too different from the empirical regret to h^* (since h^* has a small empirical regret by \mathcal{E}_i). Furthermore, the empirical regret to h^* is close to $\widetilde{\text{reg}}_{i-1}(h, h^*)$ by the event \mathcal{E}_i . These observations, along with some technical manipulations yield the lemma.

Given these lemmas, we can now prove the theorem in a relatively straightforward manner. Given our inductive hypothesis, the events \mathcal{E}_i indeed hold for all epochs $i = 1, 2, \dots, m - 1$ which allows us to invoke the lemmas. Substituting the above bounds on \mathcal{T}_1 from Lemma 3, \mathcal{T}_2 from Lemma 4 and \mathcal{T}_3 from 5 into Proposition 1 yields

$$\begin{aligned} & |\text{reg}(h, h^*, \tilde{Z}_m) - \widetilde{\text{reg}}_m(h, h^*)| \\ & \leq \frac{1}{4}\widetilde{\text{reg}}_m(h) + \frac{\eta\Delta_m}{12} + 24\alpha^2\epsilon_m \log \tau_m + 2\alpha\sqrt{6\epsilon_m\text{err}(h_{m+1}, \tilde{Z}_m)} + \Delta_m \\ & \quad + \frac{1}{4}\text{reg}(h^*, h_{m+1}, \tilde{Z}_m) + 33\alpha^2\epsilon_m + \frac{1}{4}\widetilde{\text{reg}}_m(h, h^*) + \frac{7\eta\Delta_m}{72} + 4\Delta_m \\ & \leq \frac{1}{2}\widetilde{\text{reg}}_m(h, h^*) + 57\alpha^2\epsilon_m \log \tau_m + \frac{13\eta}{72}\Delta_m + 2\alpha\sqrt{6\epsilon_m\text{err}(h_{m+1}, \tilde{Z}_m)} + 5\Delta_m \\ & \quad + \frac{1}{4}\text{reg}(h^*, h_{m+1}, \tilde{Z}_m) \end{aligned}$$

Further recalling that $c_1 \geq 2\alpha\sqrt{6}$ and $c_2 \geq 57\alpha^2$ by our assumptions on constants, we obtain

$$|\text{reg}(h, h^*, \tilde{Z}_m) - \widetilde{\text{reg}}_m(h, h^*)| \leq \frac{1}{2}\widetilde{\text{reg}}_m(h, h^*) + \frac{13\eta}{72}\Delta_m + 6\Delta_m + \frac{1}{4}\text{reg}(h^*, h_{m+1}, \tilde{Z}_m). \quad (39)$$

To complete the proof of the bound (36), we now substitute $h = h_{m+1}$ in the above bound, which yields

$$\frac{1}{2}\widetilde{\text{reg}}_m(h_{m+1}, h^*) - \frac{5}{4}\text{reg}(h, h^*, \tilde{Z}_m) \leq \frac{13\eta}{72}\Delta_m + 6\Delta_m.$$

Since $h^* \in A_i$ for all epochs $i \leq m$, we have $\widetilde{\text{reg}}_m(h, h^*) \geq \text{reg}(h, h^*) \geq 0$ for all classifiers $h \in \mathcal{H}$. Consequently, we see that

$$\text{reg}(h^*, h_{m+1}, \tilde{Z}_m) = -\text{reg}(h_{m+1}, h^*, \tilde{Z}_m) \leq \frac{52\eta}{360}\Delta_m + \frac{24}{5}\Delta_m \leq \frac{\eta}{4}\Delta_m, \quad (40)$$

where the last inequality uses the condition $38\eta \geq 1728$. We can now substitute this back into our earlier bound (39) and obtain

$$\begin{aligned} & |\text{reg}(h, h^*, \tilde{Z}_m) - \widetilde{\text{reg}}_m(h, h^*)| \\ & \leq \frac{1}{2} \widetilde{\text{reg}}_m(h, h^*) + \frac{13\eta}{72} \Delta_m + 6\Delta_m + \frac{\eta}{16} \Delta_m \leq \frac{1}{2} \widetilde{\text{reg}}_m(h, h^*) + \frac{\eta}{4} \Delta_m, \end{aligned}$$

where we use the condition $\eta/144 \geq 6$. This completes the proof of the first part of our inductive claim.

For the second part, this is almost a by product of the first part through Equation (40). Recalling that $\gamma \geq \eta/4$ by assumption, this ensures that $h^* \in A_{m+1}$.

We next establish the third part of the claim. This is obtained by combining our bound (40) with Proposition 2. We have

$$\begin{aligned} |\overline{\text{err}}_m(h^*) - \text{err}(h_{m+1}, \tilde{Z}_m)| & \leq \frac{\overline{\text{err}}_m(h^*)}{2} + \frac{3\Delta_m}{2} + \text{reg}(h^*, h_{m+1}, \tilde{Z}_m) \\ & \leq \frac{\overline{\text{err}}_m(h^*)}{2} + \frac{3\Delta_m}{2} + \frac{\eta\Delta_m}{4} \\ & \leq \frac{\overline{\text{err}}_m(h^*)}{2} + \frac{\eta\Delta_m}{2}, \end{aligned}$$

since $\eta \geq 6$. This completes the third part.

Finally, note that our analysis has been conditioned on the event \mathcal{E} so far. By Lemma 2, $\Pr(\mathcal{E}^C) \leq \delta$, which completes the proof of the theorem.

We now provide a proof for Theorem 1.

7.2.2 Proof of Theorem 1

We only prove the first part of the theorem. The second part is simply a restatement of the inequality (37) in Theorem 5. The first part is essentially a restatement of (36) in Theorem 5, except the bound uses Δ_m^* instead of Δ_m . In order to prove the theorem, pick any epoch $m \leq M$ and $h \in A_{m+1}$. Because $h^* \in A_j$, $1 \leq j \leq m+1$, we have by Lemma 1 that

$$\text{reg}(h) \leq \widetilde{\text{reg}}_m(h, h^*).$$

It then suffices to bound $\widetilde{\text{reg}}_m(h, h^*)$. By the deviation bound (36), we have

$$\begin{aligned} \widetilde{\text{reg}}_m(h, h^*) & \leq \text{reg}(h, h^*, \tilde{Z}_m) + \frac{1}{2} \widetilde{\text{reg}}_m(h, h^*) + \frac{\eta}{4} \Delta_m \\ & \leq \text{reg}(h, h_{m+1}, \tilde{Z}_m) + \frac{1}{2} \widetilde{\text{reg}}_m(h, h^*) + \frac{\eta}{4} \Delta_m \\ & \leq \frac{1}{2} \widetilde{\text{reg}}_m(h, h^*) + \left(\gamma + \frac{\eta}{4}\right) \Delta_m. \end{aligned}$$

Rearranging terms leads to

$$\widetilde{\text{reg}}_m(h, h^*) \leq 4\gamma\Delta_m$$

because $\gamma \geq \eta/4$. Now we show that $\Delta_m \leq 4\Delta_m^*$, which leads to the desired result. It is trivially true for $m = 1$ because $\Delta_1^* = \Delta_1$. For $m \geq 2$, by the deviation bound on the empirical error (38) we have

$$\begin{aligned}
\Delta_m &\leq c_1 \sqrt{\epsilon_m \left(\frac{3}{2} \overline{\text{err}}_m(h^*) + \frac{\eta}{2} \Delta_m \right)} + c_2 \epsilon_m \log \tau_m \\
&\leq 2c_1 \sqrt{\epsilon_m \overline{\text{err}}_m(h^*)} + \sqrt{\frac{c_1^2 \epsilon_m \eta}{2}} \Delta_m + c_2 \epsilon_m \log \tau_m \\
&\leq 2c_1 \sqrt{\epsilon_m \overline{\text{err}}_m(h^*)} + \frac{c_1^2 \epsilon_m \eta}{4} + \frac{\Delta_m}{2} + c_2 \epsilon_m \log \tau_m \\
&\leq 2\Delta_m^* + \frac{\Delta_m}{2},
\end{aligned}$$

where the last inequality uses our choice of constants $c_1^2 \eta/4 \leq c_2$. Rearranging terms completes the proof.

8 Conclusion

In this paper, we proposed a new algorithm for agnostic active learning in a streaming setting. The algorithm has strong theoretical guarantees, maintaining good generalization properties while attaining a low label complexity in favorable settings. Specifically, we show that the algorithm has an optimal performance in a disagreement-based analysis of label complexity, as well in special cases such as realizable problems and under Tsybakov’s low-noise condition. Additionally, we present an interesting example that highlights the structural difference between our algorithm and some predecessors in terms of label complexities. Indeed a key improvement of our algorithm is that we do not always need to query over the entire disagreement region—a limitation of most computationally efficient predecessors. This is achieved through a careful construction of an optimization problem defining good query probability functions, which relies on using refined data-dependent error estimates.

We complement our theoretical analysis with an extensive empirical evaluation of several approaches across a suite of 22 datasets. The experiments show both the pros and cons of our proposed method, which performs well when hyperparameter tuning is allowed, but suffers from lack of robustness when we fix these hyperparameters across datasets. Such a comprehensive empirical evaluation on a range of diverse datasets has not been previously done for agnostic active learning algorithms before to our knowledge, and is a key contribution of this work.

We believe that our work naturally leads to several interesting directions for future research. As the example in Section 4.2.2 reveals, the worst-case label complexity analysis in Theorem 2 is rather pessimistic. It would be interesting to obtain sharper characterization of the label complexity, by exploiting the structure of the query probability function over the disagreement region. This would likely involve understanding more fine-grained properties that make a problem easy or hard for active learning beyond the disagreement coefficient, and such a development might also lead to better algorithms. A limitation of the current theory is the somewhat poor dependence in Theorem 4 on the number of unlabeled examples needed to solve the optimization problem. Ideally, we would like to be able to use $\mathcal{O}(\tau_m)$ unlabeled examples to solve (OP) at epoch m , and improving this dependence is perhaps the most important direction for future work. Finally, while AC is extremely attractive from a theoretical standpoint, a direct implementation still seems somewhat impractical. Obtaining theory for an algorithm even closer to the practical variant OAC would be an important step in bringing the theory and implementation closer.

Acknowledgements

The authors would like to thank Kamalika Chaudhuri for helpful initial discussions.

References

Maria-Florina Balcan and Phil Long. Active and passive learning of linear separators under log-concave distributions. In *Conference on Learning Theory*, pages 288–316, 2013.

- Maria-Florina Balcan, Alina Beygelzimer, and John Langford. Agnostic active learning. In *Proceedings of the 23rd international conference on Machine learning*, pages 65–72. ACM, 2006.
- Maria-Florina Balcan, Andrei Broder, and Tong Zhang. Margin based active learning. In *Proceedings of the 20th annual conference on Learning theory*, pages 35–50. Springer-Verlag, 2007.
- P. Bartlett and S. Mendelson. Gaussian and Rademacher complexities: Risk bounds and structural results. *Journal of Machine Learning Research*, 3:463–482, 2002.
- A. Beygelzimer, S. Dasgupta, and J. Langford. Importance weighted active learning. In *ICML*, 2009.
- A. Beygelzimer, D. Hsu, J. Langford, and T. Zhang. Agnostic active learning without constraints. In *NIPS*, 2010.
- Avrim Blum, Adam Kalai, and John Langford. Beating the hold-out: Bounds for k-fold and progressive cross-validation. In *Proceedings of the twelfth annual conference on Computational learning theory*, pages 203–208. ACM, 1999.
- R.M. Castro and R.D. Nowak. Minimax bounds for active learning. *Information Theory, IEEE Transactions on*, 54(5):2339–2353, 2008.
- Nicolo Cesa-Bianchi, Alex Conconi, and Claudio Gentile. On the generalization ability of on-line learning algorithms. *Information Theory, IEEE Transactions on*, 50(9):2050–2057, 2004.
- D. Cohn, L. Atlas, and R. Ladner. Improving generalization with active learning. *Machine Learning*, 15:201–221, 1994.
- S. Dasgupta. Coarse sample complexity bounds for active learning. In *Advances in Neural Information Processing Systems 18*, 2005.
- S. Dasgupta, D. Hsu, and C. Monteleoni. A general agnostic active learning algorithm. In *NIPS*, 2007.
- D. A. Freedman. On tail probabilities for martingales. *The Annals of Probability*, 3(1):100–118, February 1975.
- S. Hanneke. *Theoretical Foundations of Active Learning*. PhD thesis, Carnegie Mellon University, 2009.
- Steve Hanneke. Theory of disagreement-based active learning. *Foundations and Trends in Machine Learning*, 7(2-3): 131–309, 2014.
- D. G. Horvitz and D. J. Thompson. A generalization of sampling without replacement from a finite universe. *J. Amer. Statist. Assoc.*, 47:663–685, 1952. ISSN 0162-1459.
- Daniel J. Hsu. *Algorithms for Active Learning*. PhD thesis, University of California at San Diego, 2010.
- S. M. Kakade and A. Tewari. On the generalization ability of online strongly convex programming algorithms. In *Advances in Neural Information Processing Systems 21*, 2009.
- Sham M Kakade, Karthik Sridharan, and Ambuj Tewari. On the complexity of linear prediction: Risk bounds, margin bounds, and regularization. In *Advances in neural information processing systems*, pages 793–800, 2009.
- Nikos Karampatziakis and John Langford. Online importance weight aware updates. In *UAI 2011, Proceedings of the Twenty-Seventh Conference on Uncertainty in Artificial Intelligence, Barcelona, Spain, July 14-17, 2011*, pages 392–399, 2011.
- Vladimir Koltchinskii. Rademacher complexities and bounding the excess risk in active learning. *J. Mach. Learn. Res.*, 11:2457–2485, December 2010.
- A. B. Tsybakov. Optimal aggregation of classifiers in statistical learning. *Ann. Statist.*, 32:135–166, 2004.
- Chicheng Zhang. A simplified treatment of oracular CAL. Personal communication, 2015.
- Chicheng Zhang and Kamalika Chaudhuri. Beyond disagreement-based agnostic active learning. In *Advances in Neural Information Processing Systems*, pages 442–450, 2014.

A Deviation bound

We use an adaptation of Freedman's inequality [Freedman, 1975] as the main concentration tool.

Lemma 6. *Let X_1, X_2, \dots, X_n be a martingale difference sequence adapted to the filtration \mathcal{F}_i . Suppose there exists a function b_n of X_1, \dots, X_n that satisfies*

$$\begin{aligned} \forall 1 \leq i \leq n, \quad |X_i| &\leq b_n, \\ 1 &\leq b_n \leq b_{\max}, \end{aligned}$$

where b_{\max} is a non-random quantity that may depend on n . Define

$$\begin{aligned} S_n &:= \sum_{i=1}^n X_i, \\ V_n &:= \sum_{i=1}^n \mathbb{E}[X_i^2 \mid \mathcal{F}_{i-1}]. \end{aligned}$$

Pick any $0 < \delta < 1/e^2$ and $n \geq 3$. We have

$$\Pr\left(S_n \geq 2\sqrt{V_n \log(1/\delta)} + 3b_n \log(1/\delta)\right) \leq 4\sqrt{\delta}(2 + \log_2 b_{\max}) \log n.$$

Proof. Define $r_j := 2^j$ for $-1 \leq j \leq m := \lceil \log_2 b_{\max} \rceil$. Then we have

$$\begin{aligned} &\Pr\left(S_n \geq 2\sqrt{V_n \log(1/\delta)} + 3b_n \log(1/\delta)\right) \\ &= \sum_{j=0}^m \Pr\left(S_n \geq 2\sqrt{V_n \log(1/\delta)} + 3b_n \log(1/\delta) \wedge r_{j-1} < b_n \leq r_j\right) \\ &\leq \sum_{j=0}^m \Pr\left(S_n \geq 2\sqrt{V_n \log(1/\delta)} + 3r_{j-1} \log(1/\delta) \wedge b_n \leq r_j\right) \\ &\leq \sum_{j=0}^m \Pr\left(S_n \geq 2\sqrt{V_n \frac{\log(1/\delta)}{2}} + 3r_j \frac{\log(1/\delta)}{2} \wedge b_n \leq r_j\right) \\ &\leq \sum_{j=0}^m 4(\log n)\sqrt{\delta} \\ &\leq 4\sqrt{\delta}(2 + \log_2 b_{\max}) \log n, \end{aligned} \tag{41}$$

where (41) is a direct consequence of Lemma 3 of Kakade and Tewari [2009]. Kakade and Tewari [2009] and the others result from simple algebra. \square

B Auxiliary results for Theorem 1

Before presenting our regret analysis, we first establish several useful results.

Lemma 7. *The threshold defined in (2) and the minimum probability $P_{\min, m}$ defined in (7) satisfy the following for all $m \geq 1$,*

$$\tau_{m-1} \Delta_{m-1} \leq \tau_m \Delta_m, \tag{42}$$

$$P_{\min, m} \geq P_{\min, m+1}, \tag{43}$$

$$\frac{\epsilon_m}{P_{\min, m}} \leq \Delta_m. \tag{44}$$

Proof. Notice that

$$\begin{aligned}
\tau_{m-1}\epsilon_{m-1} &= 32(\log(|\mathcal{H}|/\delta) + \log \tau_{m-1}) \\
&\leq 32(\log(|\mathcal{H}|/\delta) + \log \tau_m) \\
&= \tau_m\epsilon_m.
\end{aligned} \tag{45}$$

We first prove (42). It holds trivially for $m = 1$. For $m \geq 2$ we have

$$\begin{aligned}
&\tau_{m-1}\Delta_{m-1} \\
&= c_1\sqrt{\tau_{m-1}^2\epsilon_{m-1}\text{err}(h_m, \tilde{Z}_{m-1})} + c_2\tau_{m-1}\epsilon_{m-1}\log \tau_{m-1} \\
&\leq c_1\sqrt{(\tau_{m-1}\epsilon_{m-1})\tau_{m-1}\text{err}(h_{m+1}, \tilde{Z}_{m-1})} + c_2\tau_{m-1}\epsilon_{m-1}\log \tau_{m-1} \\
&\leq c_1\sqrt{(\tau_m\epsilon_m)\tau_m\text{err}(h_{m+1}, \tilde{Z}_m)} + c_2\tau_m\epsilon_m\log \tau_m \\
&= \tau_m\Delta_m,
\end{aligned}$$

where the first inequality is by the fact that h_m minimizes the empirical error on \tilde{Z}_{m-1} and the second inequality is by $\tau_{m-1}\epsilon_{m-1} \leq \tau_m\epsilon_m$. Then for (43), it is easy to see

$$\begin{aligned}
&\sqrt{\frac{\tau_{m-1}\text{err}(h_m, \tilde{Z}_{m-1})}{n\epsilon_M}} + \log \tau_{m-1} \\
&\leq \sqrt{\frac{\tau_{m-1}\text{err}(h_{m+1}, \tilde{Z}_{m-1})}{n\epsilon_M}} + \log \tau_{m-1} \\
&\leq \sqrt{\frac{\tau_m\text{err}(h_{m+1}, \tilde{Z}_m)}{n\epsilon_M}} + \log \tau_m,
\end{aligned}$$

for $m \geq 1$, implying $P_{\min, m} \geq P_{\min, m+1}$. Finally to prove (44), we have that

$$\begin{aligned}
\frac{\epsilon_m}{P_{\min, m}} &\leq \frac{\epsilon_m}{P_{\min, m+1}} \\
&= \max\left(\frac{\sqrt{\tau_m\epsilon_m^2\text{err}(h_{m+1}, \tilde{Z}_m)/(n\epsilon_M)} + \epsilon_m\log \tau_m}{c_3}, 2\epsilon_m\right) \\
&\leq \max\left(\frac{\sqrt{\epsilon_m\text{err}(h_{m+1}, \tilde{Z}_m)} + \epsilon_m\log \tau_m}{c_3}, 2\epsilon_m\right) \\
&\leq \Delta_m,
\end{aligned}$$

where the second inequality is by $\tau_m\epsilon_m \leq n\epsilon_M$, and the third inequality is by our choices of c_1, c_2 and c_3 . \square

We also need a lemma regarding the epoch schedule.

Lemma 8. *Let $\tau_{m-1} < \tau_m \leq 2\tau_{m-1}$ for all $m > 1$. Then we have for all $m \geq 1$,*

$$\begin{aligned}
\sum_{i=1}^m \frac{\tau_{i+1} - \tau_i}{\tau_i} &\leq 4\log \tau_{m+1}, \\
\sum_{i=1}^m (\tau_i - \tau_{i-1})\Delta_{i-1} &\leq 4\tau_m\Delta_m\log \tau_m.
\end{aligned}$$

Proof. Note that we can rewrite the summation in question as

$$\begin{aligned} \sum_{i=1}^m \frac{\tau_{i+1} - \tau_i}{\tau_i} &= \sum_{i=1}^m \sum_{j=\tau_i+1}^{\tau_{i+1}} \frac{1}{\tau_i} \\ &\leq \sum_{i=1}^m \sum_{j=\tau_i+1}^{\tau_{i+1}} \frac{2}{\tau_{i+1}}, \end{aligned}$$

where the second inequality uses our assumption on epoch lengths. The summation can then be further bounded as

$$\begin{aligned} \sum_{i=1}^m \frac{\tau_{i+1} - \tau_i}{\tau_i} &\leq \sum_{i=1}^m \sum_{j=\tau_i+1}^{\tau_{i+1}} \frac{2}{j} \leq \sum_{i=1}^{\tau_{m+1}} \frac{2}{i} \\ &\leq 2(1 + \log \tau_{m+1}) \\ &\leq 4 \log \tau_{m+1}, \end{aligned} \tag{46}$$

where the third inequality is by the bound $\sum_{i=1}^n 1/i \leq 1 + \log n$, and the final inequality is by $1 \leq \log \tau_m, m \geq 1$. To prove the second bound in the lemma, we write

$$\begin{aligned} \sum_{i=1}^m (\tau_i - \tau_{i-1}) \Delta_{i-1} &= \tau_1 \Delta_0 + \sum_{i=1}^{m-1} (\tau_{i+1} - \tau_i) \Delta_i \\ &= \tau_1 \Delta_0 + \sum_{i=1}^{m-1} \frac{\tau_{i+1} - \tau_i}{\tau_i} \tau_i \Delta_i \\ &\leq \tau_1 \Delta_0 + (2 + 2 \log \tau_m) \tau_m \Delta_m \\ &\leq (2 \log \tau_1 - 2) \tau_1 \Delta_1 + (2 + 2 \log \tau_m) \tau_m \Delta_m \\ &\leq (2 \log \tau_m - 2) \tau_m \Delta_m + (2 + 2 \log \tau_m) \tau_m \Delta_m \\ &= 4 \tau_m \Delta_m \log \tau_m, \end{aligned}$$

where the first inequality is by (46) and $\tau_i \Delta_i \leq \tau_m \Delta_m$ (Lemma 7), the second inequality is by our choice of Δ_0 and the fact that $\tau_1 \Delta_1 \leq 1$, and the third inequality again uses $\tau_i \Delta_i \leq \tau_m \Delta_m$. \square

C Proofs omitted from Section 7.2

We now provide the proofs of the lemmas and propositions from Section 7.2 that were used in proving Theorem 1. We start with proofs of Lemmas 1 and 2.

Proof of Lemma 1

Pick any $m \geq 1, h \in \mathcal{H}$ and $\bar{h} \in A_m$. Note that the definitions of $\text{reg}_m^\dagger(h, \bar{h})$ and $\text{reg}(h, \bar{h})$ only differ on $X \notin D_m := \text{DIS}(A_m)$, and $\forall X \notin D_m, \bar{h}(X) = h_m(X)$. We thus have

$$\begin{aligned} &\text{reg}_m^\dagger(h, \bar{h}) - \text{reg}(h, \bar{h}) \\ &= \mathbb{E}_{X,Y} \left[\mathbf{1}(X \notin D_m) \left((\mathbf{1}(h(X) \neq h_m(X)) - \mathbf{1}(\bar{h}(X) \neq h_m(X))) \right. \right. \\ &\quad \left. \left. - (\mathbf{1}(h(X) \neq Y) - \mathbf{1}(\bar{h}(X) \neq Y)) \right) \right] \\ &= \mathbb{E}_{X,Y} [\mathbf{1}(X \notin D_m) (\mathbf{1}(h(X) \neq h_m(X)) - (\mathbf{1}(h(X) \neq Y) - \mathbf{1}(h_m(X) \neq Y)))]. \end{aligned}$$

The desired result then follows from the inequality that

$$\mathbf{1}(h(X) \neq Y) - \mathbf{1}(h_m(X) \neq Y) \leq \mathbf{1}(h(X) \neq h_m(X)).$$

□

Proof of Lemma 2

Our proof strategy is to apply Lemma 6 to establish concentration of properly defined martingale difference sequences for fixed classifiers h, h' and some epoch m , and then use a union bound to get the desired statement. First we look at the concentration of the empirical regret on \tilde{Z}_m . To avoid clutter, we overload our notation so that $D_i = D_{m(i)}$, $h_i = h_{m(i)}$ and $P_i = P_{m(i)}$ when i is the index of an example rather than a round.

For any pair of classifiers h and h' , we define the random variables for the instantaneous regrets:

$$\begin{aligned} \tilde{R}_i &:= \mathbf{1}(X_i \notin D_i)(\mathbf{1}(h(X_i) \neq h_i(X_i)) - \mathbf{1}(h'(X_i) \neq h_i(X_i))) + \\ &\quad \mathbf{1}(X_i \in D_i)(\mathbf{1}(h(X_i) \neq Y_i) - \mathbf{1}(h'(X_i) \neq Y_i))Q_i/P_i(X_i) \end{aligned}$$

and the associated σ -fields $\mathcal{F}_i := \sigma(\{X_j, Y_j, Q_j\}_{j=1}^i)$. We have that \tilde{R}_i is measurable with respect to \mathcal{F}_i . Therefore $\tilde{R}_i - \mathbb{E}[\tilde{R}_i | \mathcal{F}_{i-1}]$ forms a martingale difference sequence adapted to the filtrations $\mathcal{F}_i, i \geq 1$, and

$$\mathbb{E}[\tilde{R}_i | \mathcal{F}_{i-1}] = \text{reg}_{m(i)}^\dagger(h, h')$$

according to (32) and the fact that X_i, Y_i, Q_i are independent from the past. To use Lemma 6, we first identify an upper bound on elements in the sequence:

$$\begin{aligned} |\tilde{R}_i - \mathbb{E}[\tilde{R}_i | \mathcal{F}_{i-1}]| &= |\tilde{R}_i - \text{reg}_{m(i)}^\dagger(h, h')| \leq \max(\tilde{R}_i, \text{reg}_{m(i)}^\dagger(h, h')) \\ &\leq \frac{1}{P_{\min, m(i)}} \leq \frac{1}{P_{\min, m}}, \end{aligned} \tag{47}$$

for all i such that $m(i) \leq m$, where the last inequality is by Lemma 7. The definition of $P_{\min, m}$ implies that

$$\frac{1}{P_{\min, m}} \leq \max(\sqrt{\tau_{m-1}/(n\epsilon_M)} + \log \tau_{m-1}, 2) \leq 2\sqrt{\tau_{m-1} + 1} \tag{48}$$

because $n\epsilon_M \geq 1$. Then we consider the conditional second moment. Using the fact that

$$(\mathbf{1}(h(X_i) \neq Y_i) - \mathbf{1}(h'(X_i) \neq Y_i))^2 \leq \mathbf{1}(h(X_i) \neq h'(X_i)), \tag{49}$$

we get

$$\begin{aligned} &\mathbb{E}[(\tilde{R}_i - \mathbb{E}[\tilde{R}_i | \mathcal{F}_{i-1}])^2 | \mathcal{F}_{i-1}] \\ &= \mathbb{E}[(\tilde{R}_i - \text{reg}_{m(i)}^\dagger(h, h'))^2 | \mathcal{F}_{i-1}] \leq \mathbb{E}[\tilde{R}_i^2 | \mathcal{F}_{i-1}] \\ &\leq \mathbb{E} \left[\left(\mathbf{1}(X_i \notin D_i) + \frac{\mathbf{1}(X_i \in D_i)Q_i}{P_i(X_i)} \right)^2 \mathbf{1}(h(X_i) \neq h'(X_i)) | \mathcal{F}_{i-1} \right] \\ &= \mathbb{E} \left[\left(\mathbf{1}(X_i \notin D_i) + \frac{\mathbf{1}(X_i \in D_i)Q_i}{P_i(X_i)^2} \right) \mathbf{1}(h(X_i) \neq h'(X_i)) | \mathcal{F}_{i-1} \right] \\ &= \mathbb{E} \left[\left(\mathbf{1}(X_i \notin D_i) + \frac{\mathbf{1}(X_i \in D_i)}{P_i(X_i)} \right) \mathbf{1}(h(X_i) \neq h'(X_i)) | \mathcal{F}_{i-1} \right] \\ &= \mathbb{E}_X \left[\left(\mathbf{1}(X \notin D_i) + \frac{\mathbf{1}(X \in D_i)}{P_i(X)} \right) \mathbf{1}(h(X) \neq h'(X)) \right] \\ &= \mathbb{E}_X \left[\left(\mathbf{1}(X \notin D_{m(i)}) + \frac{\mathbf{1}(X \in D_{m(i)})}{P_{m(i)}(X)} \right) \mathbf{1}(h(X) \neq h'(X)) \right] \end{aligned} \tag{50}$$

where the last two equalities are from the fact that X_i is independent from the past and replacing our overloaded notation respectively. Lemma 6 with (47), (48), and (50) then implies for any $0 < \delta_m < 1/e^2$ and $m \geq 1$, the following holds with probability at most $8\sqrt{\delta_m}(2 + \log_2(2\sqrt{\tau_{m-1}} + 1)) \log \tau_m$:

$$\begin{aligned} & |\text{reg}(h, h', \tilde{Z}_m) - \widetilde{\text{reg}}_m(h, h')| \\ & \geq \sqrt{\frac{4 \log(1/\delta_m)}{\tau_m^2} \sum_{i=1}^m (\tau_i - \tau_{i-1}) \mathbb{E}_X \left[\left(\mathbb{1}(X \notin D_i) + \frac{\mathbb{1}(X \in D_i)}{P_i(X)} \right) \mathbb{1}(h(X) \neq h'(X)) \right]} \\ & \quad + \frac{4 \log(1/\delta_m)}{nP_{\min, m}}. \end{aligned} \tag{51}$$

Then we consider the concentration of the empirical error on the importance-weighted examples. Define the random examples for the empirical errors:

$$E_i := \frac{Q_i \mathbb{1}(h(X_i) \neq Y_i \wedge X_i \in D_i)}{P_i(X_i)}$$

and the associated σ -fields $\mathcal{F}_i := \sigma(\{X_j, Y_j, Q_j\}_{j=1}^i)$. By the same analysis of the sequence of instantaneous regrets, we have $E_i - \mathbb{E}[E_i | \mathcal{F}_{i-1}]$ is a martingale difference sequence adapted to the filtrations $\mathcal{F}_i, i \geq 1$, with the following properties:

$$\begin{aligned} \mathbb{E}[E_i | \mathcal{F}_{i-1}] &= \mathbb{E}[\mathbb{1}(X_i \in D_i \wedge h(X_i) \neq Y_i) | \mathcal{F}_{i-1}] = \text{err}_{m(i)}(h), \\ |E_i - \mathbb{E}[E_i | \mathcal{F}_{i-1}]| &\leq \frac{1}{P_{\min, m(i)}} \leq \frac{1}{P_{\min, m}} \leq 2\sqrt{\tau_{m-1}} + 1, \end{aligned}$$

for all i such that $m(i) \leq m$. Furthermore,

$$\begin{aligned} \mathbb{E}[(E_i - \mathbb{E}[E_i | \mathcal{F}_{i-1}])^2 | \mathcal{F}_{i-1}] &\leq \mathbb{E} \left[\frac{\mathbb{1}(X_i \in D_i \wedge h(X_i) \neq Y_i)}{P_i(X_i)} \middle| \mathcal{F}_{i-1} \right] \\ &= \mathbb{E}_{X, Y} \left[\frac{\mathbb{1}(X \in D_i \wedge h(X) \neq Y)}{P_i(X)} \right]. \end{aligned}$$

With these properties, Lemma 6 then implies for any $0 < \delta_m < 1/e^2$ and $m \geq 1$, the following holds with probability at most $8\sqrt{\delta_m}(2 + \log_2(2\sqrt{\tau_{m-1}} + 1)) \log \tau_m$:

$$\begin{aligned} |\text{err}(h, Z_m) - \overline{\text{err}}_m(h)| &\geq \sqrt{\frac{4 \log(1/\delta_m)}{\tau_m^2} \sum_{i=1}^m (\tau_i - \tau_{i-1}) \mathbb{E}_{X, Y} \left[\frac{\mathbb{1}(X \in D_i \wedge h(X) \neq Y)}{P_i(X)} \right]} \\ &\quad + \frac{4 \log(1/\delta_m)}{nP_{\min, m}}. \end{aligned} \tag{52}$$

Setting

$$\delta_m = \left(\frac{\delta}{192|\mathcal{H}|^2 \tau_m^2 (\log \tau_m)^2} \right)^2$$

ensures that the probability of the union of the bad events (51), and (52) over all pairs of classifiers h, h' and $m \geq 1$ is bounded by $\delta > 0$. Choosing $\delta \leq |\mathcal{H}|/\sqrt{192}$, we have

$$\begin{aligned} \log(1/\delta_m) &= 2 \log \left(\frac{192|\mathcal{H}|^2 \tau_m^2 (\log \tau_m)^2}{\delta} \right) \\ &\leq 2(2 \log(|\mathcal{H}|/\delta) + 4 \log \tau_m + \log 192) \\ &\leq 8(\log(|\mathcal{H}|/\delta) + \log \tau_m), \end{aligned}$$

leading to the desired statement. \square

We then provide the proofs of Propositions 1 and 2.

Proof of Proposition 1 By the inequality (34) of Lemma 2, we have

$$\begin{aligned}
& |\text{reg}(h, h^*, \tilde{Z}_m) - \widetilde{\text{reg}}_m(h, h^*)| \\
& \leq \sqrt{\frac{\epsilon_m}{\tau_m} \sum_{i=1}^m (\tau_i - \tau_{i-1}) \mathbb{E}_X \left[\underbrace{\left(\mathbb{1}(X \notin D_i) + \frac{\mathbb{1}(X \in D_i)}{P_i(X)} \right) \mathbb{1}(h(X) \neq h^*(X))}_{\text{dev}_m(h)} \right]} + \frac{\epsilon_m}{P_{\min, m}} \quad (53)
\end{aligned}$$

We now control the term $\text{dev}_m(h)$ in order to establish the proposition. We have

$$\begin{aligned}
& \frac{\tau_m}{\epsilon_m} \text{dev}_m(h) \\
& = \sum_{i=1}^m (\tau_i - \tau_{i-1}) \mathbb{E}_X \left[\left(\frac{\mathbb{1}(X \in D_i)}{P_i(X)} + \mathbb{1}(X \notin D_i) \right) \mathbb{1}(h(X) \neq h^*(X)) \right] \\
& \leq \sum_{i=1}^m (\tau_i - \tau_{i-1}) \mathbb{E}_X \left[\frac{\mathbb{1}(X \in D_i)}{P_i(X)} \left(\mathbb{1}(h(X) \neq h_i(X)) + \mathbb{1}(h^*(X) \neq h_i(X)) \right) \right. \\
& \quad \left. + \mathbb{1}(X \notin D_i) \mathbb{1}(h(X) \neq h^*(X)) \right] \\
& \leq \sum_{i=1}^m (\tau_i - \tau_{i-1}) \mathbb{E}_X \left[2\alpha^2 \mathbb{1}(X \in D_i) \left(\mathbb{1}(h(X) \neq h_i(X)) + \mathbb{1}(h^*(X) \neq h_i(X)) \right) \right. \\
& \quad + 2\beta^2 \gamma \tau_{i-1} \Delta_{i-1} (\text{reg}(h, \tilde{Z}_{i-1}) + \text{reg}(h^*, \tilde{Z}_{i-1})) + 2\xi \tau_{i-1} \Delta_{i-1}^2 \\
& \quad \left. + \mathbb{1}(h(X) \neq h^*(X) \wedge X \notin D_i) \right],
\end{aligned}$$

where the second inequality uses our variance constraints in defining the distribution P_i for classifiers h and h^* . Note that

$$\begin{aligned}
\mathbb{1}(h(X) \neq h^*(X)) & \leq \mathbb{1}(h(X) \neq Y) + \mathbb{1}(h^*(X) \neq Y) \\
& = (\mathbb{1}(h(X) \neq Y) - \mathbb{1}(h^*(X) \neq Y)) + 2\mathbb{1}(h^*(X) \neq Y),
\end{aligned}$$

so that the final inequality can be rewritten as

$$\begin{aligned}
& \frac{\tau_m}{\epsilon_m} \text{dev}_m(h) \\
& \leq \sum_{i=1}^m (\tau_i - \tau_{i-1}) \left[2\alpha^2 (\text{reg}_i(h) + 2\text{reg}_i(h_i)) + 12\alpha^2 \text{err}_i(h^*) + 2\beta^2 \gamma \tau_{i-1} \Delta_{i-1} (\text{reg}(h, \tilde{Z}_{i-1}) \right. \\
& \quad \left. + \text{reg}(h^*, \tilde{Z}_{i-1})) + 2\xi \tau_{i-1} \Delta_{i-1}^2 + \mathbb{E}_X [\mathbb{1}(h(X) \neq h^*(X) \wedge X \notin D_i)] \right].
\end{aligned}$$

With the assumptions $\alpha \geq 1$ and $h^* \in A_i$ for all epochs $i \leq m$, the first term $\text{reg}_i(h)$ can be combined with the last disagreement term and bounded by $2\alpha^2 \text{reg}_i^\ddagger(h)$. Further noting that $\tau_{i-1} \Delta_{i-1} \leq \tau_m \Delta_m$ by Lemma 7, we can further

simplify the inequality to

$$\begin{aligned}
\frac{\tau_m}{\epsilon_m} \text{dev}_m(h) &\leq 2\alpha^2 \sum_{i=1}^m (\tau_i - \tau_{i-1}) \text{reg}_i^\dagger(h) + 4\alpha^2 \sum_{i=1}^m (\tau_i - \tau_{i-1}) \text{reg}_i(h_i) + 12\tau_m \alpha^2 \overline{\text{err}}_m(h^*) \\
&+ 2\beta^2 \gamma \tau_m \Delta_m \sum_{i=1}^m (\tau_i - \tau_{i-1}) (\text{reg}(h, \tilde{Z}_{i-1}) \\
&+ \text{reg}(h^*, \tilde{Z}_{i-1})) + 2\xi \sum_{i=1}^m (\tau_i - \tau_{i-1}) \tau_{i-1} \Delta_{i-1}^2.
\end{aligned}$$

The first summand is simply $2\alpha^2 \tau_m \widetilde{\text{reg}}_m(h)$ by definition. The final summand above can be bounded using Lemmas 7 and 8 since

$$\begin{aligned}
\sum_{i=1}^m (\tau_i - \tau_{i-1}) \tau_{i-1} \Delta_{i-1}^2 &= \sum_{i=1}^{m-1} (\tau_{i+1} - \tau_i) \tau_i \Delta_i^2 \leq \tau_m \Delta_m \sum_{i=1}^{m-1} (\tau_{i+1} - \tau_i) \Delta_i \\
&\leq 4\tau_m^2 \Delta_m^2 \log \tau_m.
\end{aligned}$$

Substituting the above inequalities back, we obtain

$$\begin{aligned}
\frac{\tau_m}{\epsilon_m} \text{dev}_m(h) &\leq 2\alpha^2 \tau_m \widetilde{\text{reg}}_m(h) + 4\alpha^2 \sum_{i=1}^m (\tau_i - \tau_{i-1}) \text{reg}_i(h_i) + 12\tau_m \alpha^2 \overline{\text{err}}_m(h^*) \\
&+ 2\beta^2 \gamma \tau_m \Delta_m \sum_{i=1}^m (\tau_i - \tau_{i-1}) (\text{reg}(h, \tilde{Z}_{i-1}) + \text{reg}(h^*, \tilde{Z}_{i-1})) + 8\xi \tau_m^2 \Delta_m^2 \log \tau_m.
\end{aligned}$$

Since $\sqrt{a+b} \leq \sqrt{a} + \sqrt{b}$, we can further bound

$$\begin{aligned}
\sqrt{\text{dev}_m(h)} &\leq \sqrt{2\alpha^2 \epsilon_m \widetilde{\text{reg}}_m(h)} + 2\alpha \sqrt{\frac{\epsilon_m}{\tau_m} \sum_{i=1}^m (\tau_i - \tau_{i-1}) \text{reg}_i(h_i)} + 2\alpha \sqrt{3\overline{\text{err}}_m(h^*) \epsilon_m} \\
&+ \beta \sqrt{2\gamma \epsilon_m \Delta_m \sum_{i=1}^m (\tau_i - \tau_{i-1}) (\text{reg}(h, \tilde{Z}_{i-1}) + \text{reg}(h^*, \tilde{Z}_{i-1}))} \\
&+ 2\Delta_m \sqrt{2\xi \tau_m \epsilon_m \log \tau_m}.
\end{aligned}$$

Substituting this inequality back into our deviation bound (53), we obtain

$$\begin{aligned}
&|\text{reg}(h, h^*, \tilde{Z}_m) - \widetilde{\text{reg}}_m(h, h^*)| \\
&\leq \frac{\epsilon_m}{P_{\min, m}} + \sqrt{2\alpha^2 \epsilon_m \widetilde{\text{reg}}_m(h)} + 2\alpha \sqrt{\frac{\epsilon_m}{\tau_m} \sum_{i=1}^m (\tau_i - \tau_{i-1}) \text{reg}_i(h_i)} + 2\alpha \sqrt{3\overline{\text{err}}_m(h^*) \epsilon_m} \\
&+ \beta \sqrt{2\gamma \epsilon_m \Delta_m \sum_{i=1}^m (\tau_i - \tau_{i-1}) (\text{reg}(h, \tilde{Z}_{i-1}) + \text{reg}(h^*, \tilde{Z}_{i-1}))} + 2\Delta_m \sqrt{2\xi \tau_m \epsilon_m \log \tau_m}.
\end{aligned}$$

We can further use Cauchy-Schwarz inequality to obtain the bound

$$\begin{aligned}
& |\text{reg}(h, h^*, \tilde{Z}_m) - \widetilde{\text{reg}}_m(h, h^*)| \\
& \leq \frac{1}{4} \widetilde{\text{reg}}_m(h) + 2\alpha^2 \epsilon_m + 2\alpha \sqrt{\frac{\epsilon_m}{\tau_m} \sum_{i=1}^m (\tau_i - \tau_{i-1}) \text{reg}_i(h_i) + 2\alpha \sqrt{3\overline{\text{err}}_m(h^*)} \epsilon_m} \\
& + \beta \sqrt{2\gamma \epsilon_m \Delta_m \sum_{i=1}^m (\tau_i - \tau_{i-1}) (\text{reg}(h, \tilde{Z}_{i-1}) + \text{reg}(h^*, \tilde{Z}_{i-1})) + 2\Delta_m \sqrt{2\xi \tau_m \epsilon_m \log \tau_m}} \\
& + \frac{\epsilon_m}{P_{\min, m}} \\
& \leq \frac{1}{4} \widetilde{\text{reg}}_m(h) + 2\alpha^2 \epsilon_m + 2\alpha \sqrt{\frac{\epsilon_m}{\tau_m} \sum_{i=1}^m (\tau_i - \tau_{i-1}) \text{reg}_i(h_i) + 2\alpha \sqrt{3\overline{\text{err}}_m(h^*)} \epsilon_m} \\
& + \beta \sqrt{2\gamma \epsilon_m \Delta_m \sum_{i=1}^m (\tau_i - \tau_{i-1}) (\text{reg}(h, \tilde{Z}_{i-1}) + \text{reg}(h^*, \tilde{Z}_{i-1})) + \Delta_m} + \frac{\epsilon_m}{P_{\min, m}} \\
& \leq \frac{1}{4} \widetilde{\text{reg}}_m(h) + 2\alpha \sqrt{\frac{\epsilon_m}{\tau_m} \sum_{i=1}^m (\tau_i - \tau_{i-1}) \text{reg}_i(h_i) + 2\alpha \sqrt{3\overline{\text{err}}_m(h^*)} \epsilon_m} \\
& + \beta \sqrt{2\gamma \epsilon_m \Delta_m \sum_{i=1}^m (\tau_i - \tau_{i-1}) (\text{reg}(h, \tilde{Z}_{i-1}) + \text{reg}(h^*, \tilde{Z}_{i-1})) + 4\Delta_m}
\end{aligned}$$

where the last two inequalities use our assumptions on ξ and α respectively. \square

Proof of Proposition 2 We start by observing that

$$|\overline{\text{err}}_m(h^*) - \text{err}(h_{m+1}, \tilde{Z}_m)| \leq |\overline{\text{err}}_m(h^*) - \text{err}(h^*, \tilde{Z}_m)| + \text{reg}(h^*, h_{m+1}, \tilde{Z}_m).$$

Since $h^* \in A_i$ for all epochs $i \leq m$, we know that h^* agrees with all the predicted labels. Consequently, $\text{err}(h^*, \tilde{Z}_m) = \text{err}(h^*, Z_m)$, where we recall that Z_m is the set of all examples where we queried labels up to epoch m . This allows us to rewrite

$$|\overline{\text{err}}_m(h^*) - \text{err}(h^*, \tilde{Z}_m)| = |\overline{\text{err}}_m(h^*) - \text{err}(h^*, Z_m)|.$$

Under the event \mathcal{E} , the above deviation is bounded, according to Lemma 2, by

$$\sqrt{\frac{\epsilon_m}{\tau_m} \sum_{i=1}^m (\tau_i - \tau_{i-1}) \mathbb{E}_{X, Y} \frac{\mathbb{1}(h^*(X) \neq Y, X \in D_i)}{P_i(X)}} + \frac{\epsilon_m}{P_{\min, m}} \leq \sqrt{\epsilon_m \frac{\overline{\text{err}}_m(h^*)}{P_{\min, m}}} + \frac{\epsilon_m}{P_{\min, m}},$$

where the inequality uses the bound $P_i(X) \geq P_{\min, i}$ for all $X \in D_i$ and $P_{\min, i} \geq P_{\min, m}$ for all epochs $i \leq m$ by Lemma 7. A further application of Cauchy-Schwarz inequality yields the bound

$$\begin{aligned}
|\overline{\text{err}}_m(h^*) - \text{err}(h^*, \tilde{Z}_m)| & \leq \frac{\overline{\text{err}}_m(h^*)}{2} + \frac{3\epsilon_m}{2P_{\min, m}} \\
& \leq \frac{\overline{\text{err}}_m(h^*)}{2} + \frac{3\Delta_m}{2}.
\end{aligned}$$

Combining the bounds yields

$$|\overline{\text{err}}_m(h^*) - \text{err}(h_{m+1}, \tilde{Z}_m)| \leq \frac{\overline{\text{err}}_m(h^*)}{2} + \frac{3\Delta_m}{2} + \text{reg}(h^*, h_{m+1}, \tilde{Z}_m),$$

which completes the proof of the proposition. \square

Finally, we prove Lemmas 3 to 5 used in the proof of Theorem 1.

Proof of Lemma 3 We first bound the $\text{reg}_i(h_i)$ terms. For $i = 1$, we have

$$\text{reg}_1(h_1) = \text{reg}(h_1) \leq 1 \leq \frac{\eta\Delta_0}{2}$$

by $P_{\min,1} = 1$ and our choices of η and Δ_0 . For $2 \leq i < m$, we have

$$\text{reg}_i(h_i) = \mathbb{E}_{X,Y} [\mathbf{1}(h_i(X) \neq Y, X \in D_i) - \mathbf{1}(h^*(X) \neq Y, X \in D_i)] = \text{reg}(h_i) \leq \widetilde{\text{reg}}_{i-1}(h_i, h^*),$$

where the second equality uses the fact that $h^* \in A_i$ for all $i \leq m$ by inductive hypothesis (9) and the inequality uses Lemma 1. Consequently, we can bound $\widetilde{\text{reg}}_{i-1}(h_i)$ using the event \mathcal{E}_i , since $\text{reg}(h_i, h^*, \tilde{Z}_{i-1}) = 0$. The event \mathcal{E}_i now further implies that

$$\text{reg}_i(h_i) \leq \widetilde{\text{reg}}_{i-1}(h_i, h^*) \leq 2\text{reg}(h_i, h^*, \tilde{Z}_{i-1}) + \frac{\eta\Delta_{i-1}}{2} \leq \frac{\eta\Delta_{i-1}}{2}.$$

Using this, we can simplify \mathcal{T}_1 as

$$\mathcal{T}_1 = 2\alpha \sqrt{\frac{\epsilon_m}{\tau_m} \sum_{i=1}^m (\tau_i - \tau_{i-1}) \text{reg}_i(h_i)} \leq 2\alpha \sqrt{\frac{\epsilon_m}{\tau_m} \sum_{i=1}^m (\tau_i - \tau_{i-1}) \frac{\eta\Delta_{i-1}}{2}} \quad (54)$$

$$\begin{aligned} &\leq 2\alpha \sqrt{2\eta\epsilon_m \Delta_m \log \tau_m} \\ &\leq \frac{\eta\Delta_m}{12} + 24\alpha^2 \epsilon_m \log \tau_m. \end{aligned} \quad (55)$$

here the second inequality is by Lemma 8 and the third inequality is by Cauchy-Schwarz. \square

Proof of Lemma 4 We first invoke Proposition 2, whose assumptions now hold due to the claim $h^* \in A_i$ in \mathcal{E}_i for all $i \leq m$, and obtain

$$\overline{\text{err}}_m(h^*) = 2\text{err}(h_{m+1}, \tilde{Z}_m) + 3\Delta_m + 2\text{reg}(h^*, h_{m+1}, \tilde{Z}_m).$$

The above inequality allows us to simplify \mathcal{T}_2 as

$$\begin{aligned} \mathcal{T}_2 &= 2\alpha \sqrt{3\epsilon_m \overline{\text{err}}_m(h^*)} \leq 2\alpha \sqrt{3\epsilon_m \left(2\text{err}(h_{m+1}, \tilde{Z}_m) + 3\Delta_m + 2\text{reg}(h^*, h_{m+1}, \tilde{Z}_m) \right)} \\ &\leq 2\alpha \sqrt{6\epsilon_m \text{err}(h_{m+1}, \tilde{Z}_m)} + 2\alpha \sqrt{9\epsilon_m \Delta_m} + 2\alpha \sqrt{6\epsilon_m \text{reg}(h^*, h_{m+1}, \tilde{Z}_m)} \\ &\leq 2\alpha \sqrt{6\epsilon_m \text{err}(h_{m+1}, \tilde{Z}_m)} + \Delta_m + \frac{1}{4} \text{reg}(h^*, h_{m+1}, \tilde{Z}_m) + 33\alpha^2 \epsilon_m, \end{aligned} \quad (56)$$

where the last inequality uses the Cauchy-Schwarz inequality. \square

Proof of Lemma 5

Observe that the event \mathcal{E}_i gives a direct bound of $\eta\Delta_{i-1}/4$ on the $\text{reg}(h^*, h_i, \tilde{Z}_{i-1})$ terms. For the other term, recall by the same event that for all $h \in \mathcal{H}$ and for all $i = 1, 2, \dots, m-1$,

$$\text{reg}(h, h^*, \tilde{Z}_i) \leq \frac{3}{2} \widetilde{\text{reg}}_i(h, h^*) + \frac{\eta}{4} \Delta_i.$$

Combining with the empirical regret bound for h^* , this implies that

$$\text{reg}(h, \tilde{Z}_i) \leq \frac{3}{2} \widetilde{\text{reg}}_i(h, h^*) + \frac{\eta}{2} \Delta_i.$$

Consequently we have the bound

$$\mathcal{T}_3^2 \leq \beta^2 \gamma \Delta_m \epsilon_m \sum_{i=1}^m (\tau_i - \tau_{i-1}) \left(3 \widetilde{\text{reg}}_{i-1}(h, h^*) + \frac{3\eta}{2} \Delta_{i-1} \right)$$

To simplify further, note that by the definition of $\widetilde{\text{reg}}_i(h, h^*)$ and our earlier definition of $\text{reg}_i^\dagger(h, h^*)$, we have

$$\begin{aligned} \sum_{i=1}^m (\tau_i - \tau_{i-1}) \widetilde{\text{reg}}_{i-1}(h, h^*) &= \sum_{i=1}^{m-1} \frac{\tau_{i+1} - \tau_i}{\tau_i} \sum_{j=1}^i (\tau_j - \tau_{j-1}) \text{reg}_j^\dagger(h, h^*) \\ &= \sum_{j=1}^{m-1} (\tau_j - \tau_{j-1}) \text{reg}_j^\dagger(h, h^*) \sum_{i=j}^{m-1} \frac{\tau_{i+1} - \tau_i}{\tau_i} \\ &\leq 4 \log \tau_m \sum_{j=1}^{m-1} (\tau_j - \tau_{j-1}) \text{reg}_j^\dagger(h, h^*) \\ &\leq 4 \tau_m \log \tau_m \widetilde{\text{reg}}_m(h, h^*), \end{aligned}$$

where the first equality uses our convention $\widetilde{\text{reg}}_0(h, h^*) = 0$ and proper index shifting, and the first inequality uses Lemma 8. We also have

$$\sum_{i=1}^m (\tau_i - \tau_{i-1}) \Delta_{i-1} \leq 4 \tau_m \Delta_m \log \tau_m.$$

by Lemma 8. Consequently, we can rewrite

$$\begin{aligned} \mathcal{T}_3^2 &\leq \beta^2 \gamma \Delta_m \epsilon_m (12 \tau_m \log \tau_m \widetilde{\text{reg}}_m(h, h^*) + 6 \tau_m \eta \log \tau_m \Delta_m) \\ &= \beta^2 \gamma \tau_m \epsilon_m \log \tau_m \Delta_m (12 \widetilde{\text{reg}}_m(h, h^*) + 6 \eta \Delta_m) \\ &\leq \frac{\eta \Delta_m \widetilde{\text{reg}}_m(h, h^*)}{72} + \frac{\eta^2 \Delta_m^2}{144}, \end{aligned}$$

where the last inequality is by our choice of β such that $\beta^2 \gamma \eta \epsilon_n \log n \leq \eta/864$. Taking square roots, we obtain

$$\begin{aligned} \mathcal{T}_3 &\leq \sqrt{\frac{\eta \Delta_m \widetilde{\text{reg}}_m(h, h^*)}{72} + \frac{\eta^2 \Delta_m^2}{144}} \\ &\leq \frac{1}{4} \widetilde{\text{reg}}_m(h, h^*) + \frac{7\eta \Delta_m}{72} \end{aligned} \tag{57}$$

□

D Label Complexity

Here we prove Theorem 2. We start with the following simple bound on the total number of label queries:

$$\sum_{i=1}^n Q_i \leq \max \left(3, \sum_{i=1}^n \mathbb{1}(X_i \in D_{m(i)}) \right) \tag{58}$$

by the fact that Algorithm 1 queries only the labels of points in the disagreement region. The random variable $\mathbb{1}(X_i \in D_{m(i)})$ is measurable with respect to the σ -field $\mathcal{F}_i := \sigma(\{X_j, Y_j, Q_j\}_{j=1}^i)$, so

$$R_i := \mathbb{1}(X_i \in D_{m(i)}) - \mathbb{E}_i[\mathbb{1}(X_i \in D_{m(i)})]$$

forms a martingale difference sequence adapted to the filtrations $\mathcal{F}_i, i \geq 1$, where $\mathbb{E}_i[\cdot] := \mathbb{E}[\cdot | \mathcal{F}_{i-1}]$. Moreover, we have $|R_i| \leq 1$ and

$$\mathbb{E}_i[R_i^2] \leq \mathbb{E}_i[\mathbb{1}(X_i \in D_{m(i)})].$$

Applying Lemma 3 of Kakade and Tewari [2009] with the above bounds and Cauchy-Schwarz, we get that with probability at least $1 - \delta$,

$$\forall n \geq 3, \quad \sum_{i=1}^n \mathbb{1}(X_i \in D_{m(i)}) \leq 2 \sum_{i=1}^n \mathbb{E}_i[\mathbb{1}(X_i \in D_{m(i)})] + 4 \log(4(\log n)/\delta). \quad (59)$$

We next bound the sum of the conditional expectations. Pick some i and consider the case $X_i \in D_{m(i)}$. Let $m := m(i)$ for the ease of notation. Define

$$\bar{h} := \begin{cases} h_m, & h_m(X_i) \neq h^*(X_i), \\ h', & h'(X_i) \neq h^*(X_i), \end{cases}$$

where

$$h_m := \arg \min_{h \in \mathcal{H}} \text{err}(h, \tilde{Z}_{m-1}), \quad (60)$$

$$h' := \arg \min_{h \in \mathcal{H} \wedge h(X_i) \neq h_m(X_i)} \text{err}(h, \tilde{Z}_{m-1}). \quad (61)$$

Because $X_i \in D_m := \text{DIS}(A_m)$, we have $h' \in A_m$, implying $\bar{h} \in A_m$. Conditioned on the high probability event in Theorem 5, we have $h^* \in A_m$ and hence

$$\begin{aligned} \Pr_X(\bar{h}(X) \neq h^*(X)) &= \Pr_X(\bar{h}(X) \neq h^*(X) \wedge X \in D_m) \\ &\leq \text{reg}_m(\bar{h}) + 2\text{err}_m(h^*) \\ &\leq 16\gamma\Delta_{m-1}^* + 2\text{err}_m(h^*), \end{aligned}$$

where the last inequality is by Theorem 1. This implies that

$$X_i \in \text{DIS}(\{h \mid \Pr_X(h(X) \neq h^*(X)) \leq 16\gamma\Delta_{m-1}^* + 2\text{err}_m(h^*)\}).$$

We thus have

$$\begin{aligned} \mathbb{E}_i[\mathbb{1}(X_i \in \text{DIS}(A_m))] &\leq \mathbb{E}_i[\mathbb{1}(X_i \in \text{DIS}(\{h \mid \Pr_X(h(X) \neq h^*(X)) \leq 16\gamma\Delta_{m-1}^* + 2\text{err}_m(h^*)\}) \\ &\leq \theta(16\gamma\Delta_{m-1}^* + 2\text{err}_m(h^*)), \end{aligned} \quad (62)$$

where the last inequality uses the definition of the disagreement coefficient

$$\theta(h^*) := \sup_{r>0} \frac{\Pr_X(\{X \mid \exists h \in \mathcal{H} \text{ s.t. } \Pr_X(h(X) \neq h^*(X)) \leq r, h^*(X) \neq h(X)\})}{r}.$$

Summing (62) over $i \in \{1, \dots, n\}$ and noting that the high probability event in Theorem 5 holds over all epochs, we get that with probability at least $1 - \delta$,

$$\begin{aligned} \forall n \geq 3, \quad \sum_{i=1}^n \mathbb{E}_i[\mathbb{1}(X_i \in D_{m(i)})] &\leq 3 + \sum_{j=2}^M (\tau_j - \tau_{j-1}) \theta(16\gamma\Delta_{j-1}^* + 2\text{err}_j(h^*)) \\ &\leq 3 + 2n\theta_{\text{err}_M}(h^*) + 16\gamma\theta \sum_{j=2}^M (\tau_j - \tau_{j-1}) \Delta_{j-1}^* \\ &= 3 + 2n\theta_{\text{err}_M}(h^*) + 16\gamma\theta \sum_{j=2}^M \frac{(\tau_j - \tau_{j-1})}{\tau_{j-1}} \tau_{j-1} \Delta_{j-1}^*. \end{aligned}$$

A similar argument as Lemma 7 shows that $\tau_j \Delta_j^*$ is increasing in j , so we have by a further invocation of Lemma 8

$$\begin{aligned} \sum_{i=1}^n \mathbb{E}_i[\mathbb{1}(X_i \in D_{m(i)})] &\leq 3 + 2n\theta \overline{\text{err}}_M(h^*) + 128\gamma\theta(n-1)\Delta_{M-1}^* \log(n-1) \\ &= 3 + 2n\theta \overline{\text{err}}_M(h^*) \\ &\quad + \theta \mathcal{O}\left(\sqrt{n \overline{\text{err}}_M(h^*)} \left(\log\left(\frac{|\mathcal{H}|}{\delta}\right) \log^2 n + \log^3 n\right) + \log\left(\frac{|\mathcal{H}|}{\delta}\right) \log^2 n + \log^3 n\right). \end{aligned}$$

Combining this and (59) via a union bound leads to the desired result.

E Proofs for Tsybakov's low-noise condition

We begin with a lemma that captures the behavior of the Δ_m^* terms, $\overline{\text{err}}_m(h^*)$ and the probability of disagreement region under the Tsybakov noise condition (10). The proofs of Corollaries 2 and 4 are immediate given the lemma.

Lemma 9. *Under the conditions of Theorem 1, suppose further that the low-noise condition (10) holds. Then we have for all epochs $m = 1, 2, \dots, M$*

$$\text{err}_m(h^*) \leq c\epsilon_m \log \tau_m \tau_m^{\frac{2(1-\omega)}{2-\omega}}, \quad \text{and} \quad \overline{\text{err}}_m(h^*) \leq 5c\epsilon_m \log^2 \tau_m \tau_m^{\frac{2(1-\omega)}{2-\omega}}. \quad (63)$$

Proof. We will establish the lemma inductively. We make the following inductive hypothesis. There exists a constant $c > 0$ (dependent on the distributional parameters) such that for all epochs $j \geq 1$, the bounds (63) in the statement of the Lemma hold. The base case for $j = 1$ trivially follows since $\text{err}_1(h^*) = \overline{\text{err}}_1(h^*) = \text{err}(h^*) \leq 1 \leq c\epsilon_1 \log \tau_1 \tau_1^{\frac{2(1-\omega)}{2-\omega}}$, which is clearly true for an appropriately large value of c . Suppose now that the claim is true for epochs $j = 1, 2, \dots, m-1$. We will establish the claim at epoch m . To see this, first note that we have

$$\text{err}_m(h^*) = \Pr(\mathbb{1}(h^*(X) \neq Y, X \in D_m)) \leq \Pr(X \in D_m).$$

Under the noise condition, we can further upper bound the probability of the disagreement region, since by Theorem 1 we obtain

$$\begin{aligned} \Pr(X \in D_m) &= \Pr(X \in \text{DIS}(A_m)) \leq \Pr(X \in \text{DIS}(\{h \in \mathcal{H} : \text{reg}(h) \leq 16\gamma\Delta_{m-1}^*\})) \\ &\leq \Pr(X \in \text{DIS}(h \in \mathcal{H} : \Pr(h(X) \neq h^*(X)) \leq \zeta(16\gamma\Delta_{m-1}^*)^\omega)), \end{aligned}$$

where the first inequality follows from Theorem 1 and the second one is a consequence of Tsybakov's noise condition (10). Recalling the definition of disagreement coefficient (11), this can be further upper bounded by

$$\Pr(X \in D_m) \leq \theta \zeta(16\gamma\Delta_{m-1}^*)^\omega. \quad (64)$$

Hence, we have obtained the bound

$$\text{err}_m(h^*) \leq \theta \zeta(16\gamma\Delta_{m-1}^*)^\omega.$$

Note that $\Delta_{m-1}^* = c_1 \sqrt{\epsilon_{m-1} \overline{\text{err}}_{m-1}(h^*)} + c_2 \epsilon_{m-1} \log \tau_{m-1}$. Our inductive hypothesis (63) allows us to upper bound the $\overline{\text{err}}_{m-1}$ in this expression for Δ_{m-1}^* and hence we obtain

$$\begin{aligned}
\Delta_{m-1}^* &\leq c_1 \sqrt{\epsilon_{m-1} 5c \epsilon_{m-1} \log^2 \tau_{m-1} \tau_{m-1}^{\frac{2(1-\omega)}{2-\omega}}} + c_2 \epsilon_{m-1} \log \tau_{m-1} \\
&\leq c_1 \epsilon_{m-1} \log \tau_m \tau_m^{\frac{1-\omega}{2-\omega}} \sqrt{5c} + c_2 \epsilon_{m-1} \log \tau_{m-1} \\
&\leq \frac{\epsilon_m \tau_m}{\tau_{m-1}} \log \tau_m \left(c_1 \sqrt{5c} \tau_m^{\frac{1-\omega}{2-\omega}} + c_2 \right) \\
&\leq 2\epsilon_m \log \tau_m \left(c_1 \sqrt{5c} \tau_m^{\frac{1-\omega}{2-\omega}} + c_2 \right).
\end{aligned}$$

Since $\tau_m \geq 3$ and $0 < \omega \leq 1$, we can further write

$$\Delta_{m-1}^* \leq 2\epsilon_m \log \tau_m \tau_m^{\frac{1-\omega}{2-\omega}} \left(c_1 \sqrt{5c} + c_2 \right). \quad (65)$$

Substituting this inequality in our earlier bound on $\text{err}_m(h^*)$ yields

$$\text{err}_m(h^*) \leq \theta \zeta \left(32\gamma \epsilon_m \log \tau_m \tau_m^{\frac{1-\omega}{2-\omega}} \left(c_1 \sqrt{5c} + c_2 \right) \right)^\omega.$$

Since $\epsilon_m \tau_m \log \tau_m \geq 1$ and $0 < \omega \leq 1$, we can further bound

$$\begin{aligned}
\text{err}_m(h^*) &\leq \theta \zeta \epsilon_m \tau_m \log \tau_m \left(32\gamma \tau_m^{\frac{-1}{2-\omega}} \left(c_1 \sqrt{5c} + c_2 \right) \right)^\omega \\
&= \theta \zeta \epsilon_m \tau_m \log \tau_m \left(32\gamma \left(c_1 \sqrt{5c} + c_2 \right) \right)^\omega \tau_m^{\frac{-\omega}{2-\omega}} \\
&= \theta \zeta \epsilon_m \tau_m^{\frac{2(1-\omega)}{2-\omega}} \log \tau_m \left(32\gamma \left(c_1 \sqrt{5c} + c_2 \right) \right)^\omega \\
&\leq c \epsilon_m \log \tau_m \tau_m^{\frac{2(1-\omega)}{2-\omega}}.
\end{aligned}$$

Here the last bound follows for any choice of c such that

$$c \geq \theta \zeta \left(32\gamma \left(c_1 \sqrt{5c} + c_2 \right) \right)^\omega.$$

The above inequality has a solution since the LHS is smaller than the RHS at $c = 0$, while for c large enough, the LHS grows linearly in c , while the RHS grows as $c^{\omega/2}$, and hence is asymptotically smaller than the LHS.

We now verify the second part of our induction hypothesis for epoch m . Note that we have

$$\begin{aligned}
\overline{\text{err}}_m(h^*) &= \frac{1}{\tau_m} \sum_{j=1}^m (\tau_j - \tau_{j-1}) \text{err}_j(h^*) \\
&\leq \frac{1}{\tau_m} \sum_{j=1}^m (\tau_j - \tau_{j-1}) c \epsilon_j \log \tau_j \tau_j^{\frac{2(1-\omega)}{2-\omega}} \\
&= \frac{1}{\tau_m} \sum_{j=1}^m \frac{(\tau_j - \tau_{j-1})}{\tau_j} c \epsilon_j \tau_j \log \tau_j \tau_j^{\frac{2(1-\omega)}{2-\omega}}.
\end{aligned}$$

We now observe that τ_j is clearly increasing in j , and so is $\tau_j \epsilon_j$ by definition. Consequently, we can further upper bound this inequality by

$$\begin{aligned}
\overline{\text{err}}_m(h^*) &\leq \frac{1}{\tau_m} \epsilon_m \tau_m \log \tau_m \sum_{j=1}^m \frac{(\tau_j - \tau_{j-1})}{\tau_j} c \tau_j^{\frac{2(1-\omega)}{2-\omega}} \\
&\stackrel{(a)}{\leq} c \epsilon_m \log \tau_m \tau_m^{\frac{2(1-\omega)}{2-\omega}} \left(1 + \sum_{j=2}^m \frac{(\tau_j - \tau_{j-1})}{\tau_j} \right) \\
&= c \epsilon_m \log \tau_m \tau_m^{\frac{2(1-\omega)}{2-\omega}} \left(1 + \sum_{j=1}^{m-1} \frac{(\tau_{j+1} - \tau_j)}{\tau_{j+1}} \right) \\
&\leq c \epsilon_m \log \tau_m \tau_m^{\frac{2(1-\omega)}{2-\omega}} \left(1 + \sum_{j=1}^{m-1} \frac{(\tau_{j+1} - \tau_j)}{\tau_j} \right)
\end{aligned}$$

where the inequality (a) holds since τ_j is increasing in j and $\omega \in (0, 1]$ so that the exponent on τ_j is non-negative, and the final inequality follows since $\tau_j \leq \tau_{j+1}$. Invoking Lemma 8, we obtain

$$\begin{aligned}
\overline{\text{err}}_m(h^*) &\leq \epsilon_m \log \tau_m (1 + 4c \log \tau_m) \tau_m^{\frac{2(1-\omega)}{2-\omega}} \\
&\leq 5c \epsilon_m \log^2 \tau_m \tau_m^{\frac{2(1-\omega)}{2-\omega}},
\end{aligned}$$

where we used the fact that $1 \leq \log \tau_m$. Therefore, we have established the second part of the inductive claim, finishing the proof of the lemma. \square

Using the lemma, we now prove the corollaries.

Proof of Corollary 2 Based on the proof of Lemma 9, we see that Δ_m^* satisfies the bound (65). Plugging this into the statement of Theorem 1 immediately yields the lemma. \square

Proof of Corollary 4 Based on the proof of Lemma 9, we see that the probability of the disagreement region follows the bound (64). Substituting the bound (65) yields the stated result. \square

F Analysis of the Optimization Algorithm

We begin by showing how to find the most violated constraint (Step 3) by calling an importance-weighted ERM oracle. Then we prove Theorem 3, followed by the framework and proof for Theorem 4.

F.1 Finding the Most Violated Constraint

Recall our earlier notation $\mathcal{I}_h^m(x) = \mathbb{1}(h(x) \neq h_m(x) \wedge x \in D_m)$. Consider solving (OP) using an unlabeled sample S of size u . Note that Step 3 is equivalent to

$$\begin{aligned}
& \arg \min_{h \in \mathcal{H}} b_m(h) - \widehat{\mathbb{E}}_X \left[\frac{\mathcal{I}_h^m(X)}{P_\lambda(X)} \right] \tag{66} \\
&= \arg \min_{h \in \mathcal{H}} 2\gamma\beta^2(\tau_m - 1)\Delta_{m-1}\text{err}(h, \tilde{Z}_{m-1}) + \widehat{\mathbb{E}}_X \left[\left(2\alpha^2 - \frac{1}{P_\lambda(X)} \right) \mathcal{I}_h^m(X) \right] \\
&= \arg \min_{h \in \mathcal{H}} 2\gamma\beta^2(\tau_m - 1)\Delta_{m-1}\text{err}(h, \tilde{Z}_{m-1}) \\
&\quad + \widehat{\mathbb{E}}_X \left[\left(2\alpha^2 - \frac{1}{P_\lambda(X)} \right) \mathcal{I}_h^m(X) + \max \left(\frac{1}{P_\lambda(X)} - 2\alpha^2, 0 \right) \mathbb{1}(X \in D_m) \right] \\
&= \arg \min_{h \in \mathcal{H}} 2\gamma\beta^2(\tau_m - 1)\Delta_{m-1}\text{err}(h, \tilde{Z}_{m-1}) \\
&\quad + \widehat{\mathbb{E}}_X \left[\max \left(2\alpha^2 - \frac{1}{P_\lambda(X)}, 0 \right) \mathbb{1}(X \in D_m) \mathbb{1}(h(X) \neq h_m(X)) \right] \\
&\quad + \widehat{\mathbb{E}}_X \left[\max \left(\frac{1}{P_\lambda(X)} - 2\alpha^2, 0 \right) \mathbb{1}(X \in D_m) \mathbb{1}(h(X) \neq -h_m(X)) \right] \\
&= \arg \min_{h \in \mathcal{H}} 2\gamma\beta^2(\tau_m - 1)\Delta_{m-1}\text{err}(h, \tilde{Z}_{m-1}) \\
&\quad + \widehat{\mathbb{E}}_X [|s_\lambda(X)| \mathbb{1}(X \in D_m) \mathbb{1}(h(X) \neq \text{sign}(s_\lambda(X))h_m(X))],
\end{aligned}$$

where $s_\lambda(X) := 2\alpha^2 - 1/P_\lambda(X)$. In the above derivation, the second equality is by the fact that the extra term added to the objective is independent of h and hence does not change the minimizer. The third equality uses a case analysis on the sign of $s_\lambda(X)$ and the identity $1 - \mathbb{1}(h(X) \neq h_m(X)) = \mathbb{1}(h(X) \neq -h_m(X))$. The last expression suggests that an importance-weighted error minimization oracle can find the desired classifier on examples $\{(X, Y^*, W)\}$ with labels and importance weights defined as:

$$\begin{aligned}
Y^* &:= \arg \min_Y c(X, Y), \\
W &:= |c(X, 1) - c(X, -1)|,
\end{aligned}$$

where

$$c(X, Y) := \begin{cases} 2\gamma\beta^2\Delta_{m-1} \left(\frac{\mathbb{1}(X_i \in D_{m(i)} \wedge Y \neq Y_i) Q_i}{P_{m(i)}(X_i)} + \mathbb{1}(X_i \notin D_{m(i)} \wedge Y \neq h_{m(i)}(X_i)) \right), & X = X_i \in \tilde{Z}_{m-1}, \\ \frac{1}{u} |s_\lambda(X)| \mathbb{1}(X \in D_m) \mathbb{1}(Y \neq \text{sign}(s_\lambda(X))h_m(X)), & X \in S. \end{cases} \tag{67}$$

F.2 Proof of Theorem 3

Where clear from context, we drop the subscript m .

We first show that each coordinate ascent step causes sufficient increase in the dual objective. Pick any h and λ . Let λ' be identical to λ except that $\lambda'_h = \lambda_h + \delta$ for some $\delta > 0$. Then the increase in the dual objective \mathcal{D} can be computed directly:

$$\begin{aligned}
& \mathcal{D}(\lambda') - \mathcal{D}(\lambda) \\
&= \delta \mathbb{E}_X [\mathcal{I}_h^m(X)] + 2\mathbb{E}_X [\mathbb{1}(X \in D_m) (\sqrt{\mathbf{q}_\lambda(X)^2 + \delta \mathcal{I}_h^m(X)} - \mathbf{q}_\lambda(X))] - \delta b(h) \\
&\geq \delta \mathbb{E}_X [\mathcal{I}_h^m(X)] + 2\mathbb{E}_X \left[\mathbf{q}_\lambda(X) \left(\frac{\delta \mathcal{I}_h^m(X)}{2\mathbf{q}_\lambda(X)^2} - \frac{\delta^2 \mathcal{I}_h^m(X)^2}{8\mathbf{q}_\lambda(X)^4} \right) \right] - \delta b(h) \tag{68}
\end{aligned}$$

$$\begin{aligned}
&= \delta \mathbb{E}_X \left[\left(1 + \frac{1}{\mathbf{q}_\lambda(X)} \right) \mathcal{I}_h^m(X) - b(h) \right] - \delta^2 \mathbb{E} \left[\frac{\mathcal{I}_h^m(X)^2}{4\mathbf{q}_\lambda(X)^3} \right] \\
&= \delta \left(\mathbb{E}_X \left[\frac{\mathcal{I}_h^m(X)}{P_\lambda(X)} \right] - b(h) \right) - \frac{\delta^2}{4} \mathbb{E} \left[\frac{\mathcal{I}_h^m(X)^2}{\mathbf{q}_\lambda(X)^3} \right]. \tag{69}
\end{aligned}$$

The inequality (68) uses the fact that $\sqrt{1+z} \geq 1 + z/2 - z^2/8$ for all $z \geq 0$ (provable, for instance, using Taylor's theorem). The lower bound (69) on the increase in the objective value is maximized exactly at

$$\delta = 2 \frac{\mathbb{E}[\mathcal{I}_h^m(X)/P_\lambda(X) - b(h)]}{\mathbb{E}_X[\mathcal{I}_h^m(X)^2/\mathbf{q}_\lambda(X)^3]}, \quad (70)$$

as in Step (7). Plugging into (69), it follows that if h is chosen on some iteration of Algorithm 2 prior to halting then the dual objective \mathcal{D} increases by at least

$$\frac{\mathbb{E}_X[\mathcal{I}_h^m(X)/P_\lambda(X) - b(h)]^2}{\mathbb{E}_X[\mathcal{I}_h^m(X)^2/\mathbf{q}_\lambda(X)^3]} \geq \varepsilon^2 \mu^3 \quad (71)$$

since $\mathbf{q}_\lambda(x) \geq \mu$, and since $\mathbb{E}_X[\mathcal{I}_h^m(X)/P_\lambda(X) - b(h)] \geq \varepsilon$.

The initial dual objective is $\mathcal{D}(\mathbf{0}) = (1 + \mu)^2 \Pr(D_m)$. Further, by duality and the fact that $P(X) = 1/2$ is a feasible solution to the primal problem, we have $\mathcal{D}(\lambda) \leq 2(1 + \mu^2) \Pr(D_m)$. And of course, rescaling can never cause the dual objective to decrease. Combining, it follows that the coordinate ascent algorithm halts in at most $\Pr(D_m)(2(1 + \mu^2) - (1 + \mu)^2)/(\varepsilon^2 \mu^3) \leq \Pr(D_m)/(\varepsilon^2 \mu^3)$ rounds proving the bound given in the theorem.

By this same reasoning, the left hand side of (71) is equal to $\delta \cdot \mathbb{E}_X[\mathcal{I}_h^m(X)/P_\lambda(X) - b(h)]$, which is at least $\delta \varepsilon$. That is, the change on each round in the dual objective \mathcal{D} is at least ε times the change in one of the coordinates λ_h . Furthermore, the rescaling step can never cause the weights λ_h to increase. Therefore, $\varepsilon \|\hat{\lambda}\|_1$ is upper bounded by the total change in the dual objective, which we bounded above. This proves the bound on $\|\hat{\lambda}\|_1$ given in the theorem.

To see (16), consider first the function $g(s) = \mathcal{D}(s \cdot \lambda)$ for λ as in the algorithm *after* the rescaling step has been executed. At this point, it is necessarily the case that $s = 1$ maximizes g over $s \in [0, 1]$ (since λ has already been rescaled). This implies that $g'(1) \geq 0$ where g' is the derivative of g ; that is,

$$0 \leq g'(1) = \mathbb{E} \left[\frac{\sum_h \lambda_h \mathcal{I}_h^m(X)}{P_{s \cdot \lambda}(X)} \right] - \sum_h \lambda_h b(h). \quad (72)$$

Now let $F(P)$ denote the modified primal objective function in (12) and let F^* denote the optimal objective value

$$F^* := \inf_P \mathbb{E}_X \left[\frac{1}{1 - P(X)} \right] + \mu^2 \mathbb{E}_X \left[\frac{\mathbb{1}(X \in D_m)}{P(X)} \right] \quad (73)$$

s.t. P satisfying (5) and $\forall x \in \mathcal{X} \ 0 \leq P(x) \leq 1$.

Then we have

$$F(P_{\hat{\lambda}}) \leq F(P_{\hat{\lambda}}) + \sum_h \hat{\lambda}_h \left(\mathbb{E}_X \left[\frac{\mathcal{I}_h^m(X)}{P_{\hat{\lambda}}(X)} \right] - b(h) \right) \quad (74)$$

$$= \inf_{0 \leq P(x) \leq 1} \mathcal{L}(P, \hat{\lambda}) \quad (75)$$

$$\leq \sup_{\lambda \geq 0} \inf_{0 \leq P(x) \leq 1} \mathcal{L}(P, \lambda) \leq F^*. \quad (76)$$

Here, (74) follows from (72); (75) by the definition of $P_\lambda(X)$ as the minimizer of the Lagrangian. To establish (76), first notice that the following holds for all feasible \tilde{P} and all non-negative λ :

$$\inf_{0 \leq P(x) \leq 1} \mathcal{L}(P, \lambda) \leq \mathcal{L}(\tilde{P}, \lambda) \leq F(\tilde{P})$$

by the definition of the Lagrangian (13). This implies

$$\inf_{0 \leq P(x) \leq 1} \mathcal{L}(P, \lambda) \leq F^*$$

for all non-negative λ , leading to (76). Then we have

$$\mathbb{E} \left[\frac{1}{1 - P_{\hat{\lambda}}(X)} \right] \leq F(P_{\hat{\lambda}}) \leq F^* \leq f^* + \mu \Pr(D_m).$$

F.3 Proof of Theorem 4

For $\varepsilon > 0$, define $\Lambda_\varepsilon := \{\boldsymbol{\lambda} \in \mathbb{R}^{\mathcal{H}} : \boldsymbol{\lambda} \geq \mathbf{0}, \|\boldsymbol{\lambda}\|_1 \leq 1/\varepsilon\}$. We begin with a simple lemma.

Lemma 10. *Suppose $\phi: \mathbb{R} \times \mathcal{X} \rightarrow \mathbb{R}$ be L -Lipschitz with respect to its first argument, and $\phi(\sum_{h \in \mathcal{H}} \lambda_h \mathcal{I}_h^m(x), x) \leq R$ for all $\boldsymbol{\lambda} \in \Lambda_\varepsilon$ and $x \in \mathcal{X}$. Let $\widehat{\mathbb{E}}_X[\cdot]$ denote the empirical expectation with respect to an i.i.d. sample from $\mathbb{P}_{\mathcal{X}}$. For any $\delta \in (0, 1)$, with probability at least $1 - \delta$, every $\boldsymbol{\lambda} \in \Lambda_\varepsilon$ satisfies*

$$\begin{aligned} & \left| \widehat{\mathbb{E}}_X \left[\phi \left(\sum_{h \in \mathcal{H}} \lambda_h \mathcal{I}_h^m(X), X \right) \right] - \mathbb{E}_X \left[\phi \left(\sum_{h \in \mathcal{H}} \lambda_h \mathcal{I}_h^m(X), X \right) \right] \right| \\ & \leq \frac{2L}{\varepsilon} \cdot \sqrt{\frac{2 \ln |\mathcal{H}|}{u}} + R \cdot \sqrt{\frac{\ln(1/\delta)}{u}}. \end{aligned}$$

Proof. Let $\mathbf{x} \in \{0, 1\}^{\mathcal{H}}$ denote the vector with $x_h = \mathbb{1}(h(x) \neq h_m(x))$, and define the linear function class

$$\mathcal{F} := \{x \mapsto \langle \boldsymbol{\lambda}, \mathbf{x} \rangle : \boldsymbol{\lambda} \in \Lambda_\varepsilon\}.$$

By a simple variant of the argument by Bartlett and Mendelson [2002], with probability at least $1 - \delta$,

$$\left| \widehat{\mathbb{E}}_X \left[\phi \left(\sum_{h \in \mathcal{H}} \lambda_h \mathcal{I}_h^m(X), X \right) \right] - \mathbb{E}_X \left[\phi \left(\sum_{h \in \mathcal{H}} \lambda_h \mathcal{I}_h^m(X), X \right) \right] \right| \leq 2L \cdot \mathcal{R}_u(\mathcal{F}) + R \cdot \sqrt{\frac{\ln(1/\delta)}{u}}$$

for all $\boldsymbol{\lambda} \in \Lambda_\varepsilon$, where $\mathcal{R}_u(\mathcal{F})$ is the expected Rademacher average for the linear function class \mathcal{F} for an i.i.d. sample of size n . By Kakade et al. [2009], this Rademacher complexity satisfies

$$\mathcal{R}_u(\mathcal{F}) \leq \frac{1}{\varepsilon} \sqrt{\frac{2 \ln |\mathcal{H}|}{u}}.$$

This completes the proof. \square

Lemma 11. *Pick any $\delta \in (0, 1)$. Let $\widehat{\mathbb{E}}_X[\cdot]$ denote the empirical expectation with respect to an i.i.d. sample from $\mathbb{P}_{\mathcal{X}}$. With probability at least $1 - \delta$, every $\boldsymbol{\lambda} \in \Lambda_\varepsilon$ satisfies*

$$\left| \mathbb{E}_X \left[\frac{1}{1 - P_\lambda(X)} \right] - \widehat{\mathbb{E}}_X \left[\frac{1}{1 - P_\lambda(X)} \right] \right| \leq \sqrt{\frac{2 \ln |\mathcal{H}|}{\mu^2 \varepsilon^2 u}} + \sqrt{\frac{(\mu^2 + 1/\varepsilon) \ln(3/\delta)}{u}}$$

and for all $h \in \mathcal{H}$,

$$\left| \mathbb{E}_X \left[\frac{\mathcal{I}_h^m(X)}{P_\lambda(X)} \right] - \widehat{\mathbb{E}}_X \left[\frac{\mathcal{I}_h^m(X)}{P_\lambda(X)} \right] \right| \leq \sqrt{\frac{2 \ln |\mathcal{H}|}{\mu^4 \varepsilon^2 u}} + \sqrt{\frac{\ln(3|\mathcal{H}|/\delta)}{\mu^2 u}} + \sqrt{\frac{\ln(6|\mathcal{H}|/\delta)}{2u}}$$

and

$$\left| \mathbb{E}_X[\mathcal{I}_h^m(X)] - \widehat{\mathbb{E}}_X[\mathcal{I}_h^m(X)] \right| \leq \sqrt{\frac{\ln(6|\mathcal{H}|/\delta)}{2u}}.$$

Proof. Observe that $1/(1 - P_\lambda(x)) = 1 + q_\lambda(x)$ for all $\boldsymbol{\lambda} \in \Lambda_\varepsilon$ and $x \in \mathcal{X}$. Now we apply Lemma 10 to the function $\phi_1(z, x) := \sqrt{\mu^2 + z}$, which is $(2\mu)^{-1}$ -Lipschitz with respect to its first argument. Since $q_\lambda(x) = f_1(\sum_{h \in \mathcal{H}} \lambda_h \mathcal{I}_h^m(x), x) \leq \sqrt{\mu^2 + 1/\varepsilon}$ for all $\boldsymbol{\lambda} \in \Lambda_\varepsilon$ and $x \in \mathcal{X}$, Lemma 10 implies that, with probability at least $1 - \delta/3$,

$$\left| \mathbb{E}_X \left[\frac{1}{1 - P_\lambda(X)} \right] - \widehat{\mathbb{E}}_X \left[\frac{1}{1 - P_\lambda(X)} \right] \right| \leq \frac{1}{\mu \varepsilon} \sqrt{\frac{2 \ln |\mathcal{H}|}{u}} + \sqrt{\frac{(\mu^2 + 1/\varepsilon) \ln(3/\delta)}{u}}, \quad \forall \boldsymbol{\lambda} \in \Lambda_\varepsilon. \quad (77)$$

Next, observe that for every $h \in \mathcal{H}$ and $x \in \mathcal{X}$,

$$\frac{\mathcal{I}_h^m(x)}{P_\lambda(x)} = \mathcal{I}_h^m(x) + \frac{\mathcal{I}_h^m(x)}{q_\lambda(x)}.$$

By Hoeffding's inequality and a union bound, we have with probability at least $1 - \delta/3$,

$$\left| \mathbb{E}_X[\mathcal{I}_h^m(X)] - \widehat{\mathbb{E}}_X[\mathcal{I}_h^m(X)] \right| \leq \sqrt{\frac{\ln(6|\mathcal{H}|/\delta)}{2u}}, \quad \forall h \in \mathcal{H}. \quad (78)$$

Now we apply Lemma 10 to the functions $\phi_h(z, x) := \mathcal{I}_h^m(x)/\sqrt{\mu^2 + z}$ for each $h \in \mathcal{H}$; each function ϕ_h is $(2\mu^2)^{-1}$ -Lipschitz with respect to its first argument. Furthermore, since $\phi_h(\sum_{h \in \mathcal{H}} \lambda_h \mathcal{I}_h^m(x), x) = \mathcal{I}_h^m(x)/q_\lambda(x) \leq 1/\mu$ for all $\lambda \in \Lambda_\varepsilon$ and $x \in \mathcal{X}$, Lemma 10 and a union bound over all $h \in \mathcal{H}$ implies that, with probability at least $1 - \delta/3$

$$\left| \mathbb{E}_X \left[\frac{\mathcal{I}_h^m(X)}{q_\lambda(X)} \right] - \widehat{\mathbb{E}}_X \left[\frac{\mathcal{I}_h^m(X)}{q_\lambda(X)} \right] \right| \leq \sqrt{\frac{2 \ln |\mathcal{H}|}{\mu^4 \varepsilon^2 u}} + \sqrt{\frac{\ln(3|\mathcal{H}|/\delta)}{\mu^2 u}}, \quad \forall \lambda \in \Lambda_\varepsilon, h \in \mathcal{H}. \quad (79)$$

Finally, by a union bound, all of (77), (78), and (79) hold simultaneously with probability at least $1 - \delta$. \square

We can now prove Theorem 4. We first state a slightly more explicit version of the theorem, which is then proved.

Theorem 6. *Let S be an i.i.d. sample of size u from the \mathbb{P}_X . Suppose Algorithm 2 is run on the m -th epoch for solving $(\text{OP}_{S,\varepsilon})$ up to slack ε in the variance constraints. Then the following holds:*

1. Algorithm 2 halts in at most $\frac{\widehat{\text{Pr}}(D_m)}{8P_{\min,m}^3 \varepsilon^2}$ iterations, where $\widehat{\text{Pr}}(D_m) := \sum_{X \in S} \mathbf{1}(X \in D_m)/u$.
2. The solution $\widehat{\lambda} \geq \mathbf{0}$ it outputs has bounded ℓ_1 norm:

$$\|\widehat{\lambda}\|_1 \leq \widehat{\text{Pr}}(D_m)/\varepsilon.$$

3. There exists an absolute constant $C > 0$ such that the following holds. If

$$u \geq C \cdot \left(\left(\frac{1}{P_{\min,m}^4 \varepsilon^2} + \alpha^4 \right) \cdot \frac{\log |\mathcal{H}|}{\varepsilon^2} + \left(\frac{1}{P_{\min,m}^2} + \frac{1}{\varepsilon} + \alpha^4 \right) \cdot \frac{\log(1/\delta)}{\varepsilon^2} \right),$$

then with probability at least $1 - \delta$, the query probability function $P_{\widehat{\lambda}}(x)$ satisfies

- All constraints of (OP) except with slack 2.5ε in constraints (5),
- Approximate primal optimality:

$$\mathbb{E}_X \left[\frac{1}{1 - P_{\widehat{\lambda}}(X)} \right] \leq f^* + 8P_{\min,m} \text{Pr}(D_m) + (2 + 4P_{\min,m})\varepsilon,$$

where f^* is the optimal value of (OP) defined in (17).

Theorem 4 is just a result of some simplifications in the $\mathcal{O}(\cdot)$ notation in the above result. We now prove the theorem.

Proof of Theorem 6 The first two statements, finite convergence and boundedness of the solution's ℓ_1 norm, can be proved with the techniques in Appendix F.2 that establish the same for Theorem 3. We thus focus on proving the third statement here.

Let $\widehat{\mathbb{E}}_X[\cdot]$ denote empirical expectation with respect to S . Hoeffding's inequality implies that with probability at least $1 - \delta/2$,

$$\widehat{\mathbb{E}}_X[\mathbf{1}(X \in D_m)] \leq \mathbb{E}_X[\mathbf{1}(X \in D_m)] + \varepsilon. \quad (80)$$

Also, Lemma 11 implies that with probability at least $1 - \delta/2$,

$$\left| \widehat{\mathbb{E}}_X \left[\frac{1}{1 - P_{\lambda}(X)} \right] - \mathbb{E}_X \left[\frac{1}{1 - P_{\lambda}(X)} \right] \right| \leq \varepsilon, \quad \forall \lambda \in \Lambda_{\varepsilon/2}; \quad (81)$$

$$\left| \mathbb{E}_X [\mathcal{I}_h^m(X)] - \widehat{\mathbb{E}}_X [\mathcal{I}_h^m(X)] \right| \leq \varepsilon/(8\alpha^2), \quad \forall h \in \mathcal{H}; \quad (82)$$

$$\left| \mathbb{E}_X \left[\frac{\mathcal{I}_h^m(X)}{P_{\lambda}(X)} \right] - \widehat{\mathbb{E}}_X \left[\frac{\mathcal{I}_h^m(X)}{P_{\lambda}(X)} \right] \right| \leq \varepsilon/4, \quad \forall \lambda \in \Lambda_{\varepsilon/2}, h \in \mathcal{H}. \quad (83)$$

Therefore, by a union bound, there is an event of probability mass at least $1 - \delta$ on which Eqs. (80), (81), (82), (83) hold simultaneously. We henceforth condition on this event.

By Theorem 3, $\hat{\lambda}$ satisfies $\|\hat{\lambda}\|_1 \leq 1/\varepsilon$, the bound constraints in (6), as well as

$$\widehat{\mathbb{E}}_X \left[\frac{\mathcal{I}_h^m(X)}{P_{\hat{\lambda}}(X)} \right] \leq b_m(h) + 2\varepsilon, \quad \forall h \in \mathcal{H}, \quad (84)$$

and

$$\widehat{\mathbb{E}}_X \left[\frac{1}{1 - P_{\hat{\lambda}}(X)} \right] \leq \widehat{\mathbb{E}}_X \left[\frac{1}{1 - \widehat{P}_{\varepsilon}^*(X)} \right] + 4P_{\min,m} \widehat{\mathbb{E}}_X [\mathbb{1}(X \in D_m)] \quad (85)$$

where $\widehat{P}_{\varepsilon}^*$ is the optimal solution⁸ to $(\text{OP}_{S,\varepsilon})$. We use this to show that $P_{\hat{\lambda}}$ is a feasible solution for $(\text{OP}_{2.5\varepsilon})$, and compare its objective value to the optimal objective value for (OP).

Applying (82) and (83) to (84) gives

$$\mathbb{E}_X \left[\frac{\mathcal{I}_h^m(X)}{P_{\hat{\lambda}}(X)} \right] \leq b_m(h) + 2.5\varepsilon, \quad \forall h \in \mathcal{H}.$$

Since $P_{\hat{\lambda}}$ also satisfies the bound constraints in (6), it follows that $P_{\hat{\lambda}}$ is feasible for $(\text{OP}_{2.5\varepsilon})$.

Now we turn to the objective value. Applying (80) and (81) to (85) gives

$$\mathbb{E}_X \left[\frac{1}{1 - P_{\hat{\lambda}}(X)} \right] \leq \widehat{\mathbb{E}}_X \left[\frac{1}{1 - \widehat{P}_{\varepsilon}^*(X)} \right] + 4P_{\min,m} \mathbb{E}_X [\mathbb{1}(X \in D_m)] + (1 + 4P_{\min,m})\varepsilon. \quad (86)$$

We need to relate the first term on the right-hand side to the optimal objective value for (OP).

Let λ^* be the output of running Algorithm 2 for solving (OP) up to slack $\varepsilon/2$. By Theorem 3, λ^* satisfies $\|\lambda^*\|_1 \leq 2/\varepsilon$, the bound constraints in (6), as well as

$$\mathbb{E}_X \left[\frac{\mathcal{I}_h^m(X)}{P_{\lambda^*}(X)} \right] \leq b_m(h) + \varepsilon/2, \quad \forall h \in \mathcal{H},$$

and

$$\mathbb{E}_X \left[\frac{1}{1 - P_{\lambda^*}(X)} \right] \leq f^* + 4P_{\min,m} \mathbb{E}_X [\mathbb{1}(X \in D_m)]. \quad (87)$$

Applying (81) to (87), we have

$$\widehat{\mathbb{E}}_X \left[\frac{1}{1 - P_{\lambda^*}(X)} \right] \leq f^* + 4P_{\min,m} \mathbb{E}_X [\mathbb{1}(X \in D_m)] + \varepsilon. \quad (88)$$

And applying (82) and (83) to (87) gives

$$\widehat{\mathbb{E}}_X \left[\frac{\mathcal{I}_h^m(X)}{P_{\lambda^*}(X)} \right] \leq b_m(h) + \varepsilon, \quad \forall h \in \mathcal{H}. \quad (89)$$

⁸Note that on a finite sample S , the primal optimization variables $P(x)$ are in a compact and convex subset of $\mathbb{R}^{|S|}$, and therefore an optimal solution can always be attained.

Table 2: Binary classification datasets used in experiments

Dataset	n	s	d	r
titanic	2201	3	8	0.323
abalone	4176	8	8	0.498
mushroom	8124	22	117	0.482
eeg-eye-state	14980	13.9901	14	0.449
20news	18845	93.8854	101631	0.479
magic04	19020	9.98728	10	0.352
letter	20000	15.5807	16	0.233
ijcnn1	24995	13	22	0.099
nomao	34465	82.3306	174	0.286
shuttle	43500	7.04984	9	0.216
bank	45210	13.9519	44	0.117
a9a	48841	13.8676	123	0.239
adult	48842	11.9967	105	0.239
w8a	49749	11.6502	300	0.030
bio	145750	73.4184	74	0.009
maptaskcoref	158546	40.4558	5944	0.438
activity	165632	18.5489	20	0.306
skin	245057	2.948	3	0.208
vehv2binary	299254	48.5652	105	0.438
census	299284	32.0072	401	0.062
covtype	581011	11.8789	54	0.488
rcv1	781265	75.7171	43001	0.474

This establishes that λ^* is a feasible solution for $(\text{OP}_{S,\varepsilon})$. In particular,

$$\begin{aligned} \widehat{\mathbb{E}}_X \left[\frac{1}{1 - \widehat{P}_\varepsilon^*(X)} \right] &\leq \widehat{\mathbb{E}}_X \left[\frac{1}{1 - P_{\lambda^*}(X)} \right] \\ &\leq f^* + 4P_{\min,m} \mathbb{E}_X[\mathbb{1}(X \in D_m)] + \varepsilon \end{aligned}$$

where the second inequality follows from (88). We now combine this with (86) to obtain

$$\mathbb{E}_X \left[\frac{1}{1 - P_{\widehat{\lambda}}(X)} \right] \leq f^* + 8P_{\min,m} \mathbb{E}_X[\mathbb{1}(X \in D_m)] + (2 + 4P_{\min,m})\varepsilon.$$

□

G Experimental Details

Here we provide more details about the experiments.

G.1 Datasets

Table 2 gives details about the 22 binary classification datasets used in our experiments, where n is the number of examples, d is the number of features, s is the average number of non-zero features per example, and r is the proportion of the minority class.

G.2 Hyper-parameter Settings

We start with the actual hyper-parameters used by OAC. Going back to Algorithm 1, we note that the tuning parameters get used in mostly the following three quantities: $\gamma\Delta_{i-1}$, α and β . We use this fact to reduce the number of input parameters. Let $c_0 := \gamma^2 c_1 32(\log(|\mathcal{H}|/\delta) + \log(i-1))$ (treating $\log(i-1)$ as a constant) and set $\eta = 864$, $\gamma = \eta/4$ and $c_2 = \eta c_1^2/4$ according to our theory. Then we have

$$\begin{aligned}\gamma\Delta_{i-1} &= \sqrt{\gamma^2 c_1 \epsilon_{i-1} \text{err}(h_i, \tilde{Z}_{i-1})} + \gamma c_2 \epsilon_{i-1} \log(i-1) \\ &= \sqrt{\frac{c_0 \text{err}(h_i, \tilde{Z}_{i-1})}{i-1}} + c_0 \frac{c_2 \log(i-1)}{\gamma c_1 i-1},\end{aligned}$$

where $\frac{c_2}{\gamma c_1} = c_1 = \mathcal{O}(\alpha)$. Based on this, we use

$$\hat{\Delta}_{i-1} := \sqrt{\frac{c_0 \text{err}(h_i, \tilde{Z}_{i-1})}{i-1}} + \max(2\alpha, 4) c_0 \frac{\log(i-1)}{i-1} \quad (90)$$

in Algorithm 3 in place of $\gamma\Delta_{i-1}$. Next we consider

$$\begin{aligned}\beta^2 &\leq \frac{1}{216n\epsilon_n \log n} \\ &\approx \frac{\gamma^2 c_1}{216c_0 \log n} \quad \because n\epsilon_n \approx c_0/(\gamma^2 c_1) \text{ by treating } \log n \text{ as a constant} \\ &= \mathcal{O}\left(\frac{\alpha}{c_0}\right) \quad \text{by again treating } \log n \text{ as a constant and } c_1 = \mathcal{O}(\alpha).\end{aligned}$$

Based on the last expression, we set $\beta := \frac{\sqrt{\alpha/c_0}}{\beta_{scale}}$, where $\beta_{scale} > 0$ is a tuning parameter that controls the influence of the regret term in the variance constraints. In sum, the actual input parameters boil down to the cover size l , $\alpha \geq 1$, c_0 and β_{scale} , and we use them to set

$$\gamma\Delta_{i-1} := \sqrt{\frac{c_0 \text{err}(h_i, \tilde{Z}_{i-1})}{i-1}} + \max(2\alpha, 4) c_0 \frac{\log(i-1)}{i-1}, \quad \beta = \frac{\sqrt{\alpha/c_0}}{\beta_{scale}}.$$

Finally, we use the following setting for the minimum query probability:

$$P_{\min,i} = \min \left(\frac{1}{\sqrt{(i-1)\text{err}(h_i, \tilde{Z}_{i-1}) + \log(i-1)}}, \frac{1}{2} \right).$$

Next we describe hyper-parameter settings for different algorithms. A common hyper-parameter is the learning rate of the underlying online oracle, which is a reduction to importance-weighted logistic regression. For all active learning algorithm, we try the following 11 learning rates: $10^{-1} \cdot \{2^{-2}, 2^{-1}, \dots, 2^8\}$. Active learning hyper-parameter settings are given in the following table:

algorithm	parameter settings	total number of settings
OAC	$(c_0, l, \beta_{scale}, \alpha) \in \{0.1 \cdot \{2^{-10}, \dots, 2^{-1}\}, 0.1, 0.3, \dots, 0.9, 2^0, \dots, 2^4\} \times \{3, 6, 12, 24, 48\} \times \{\sqrt{10}\} \times \{1\}$	100
IWAL ₀	$C_0 \in \{0.1 \cdot \{2^{-17}, 2^{-16}, \dots, 2^0\}, 2^0, 2^1, \dots, 2^4\}$	23
ORA-IWAL ₀	$C_0 \in \{2^{-17}, \dots, 2^5\}$	23
IWAL ₁	C_0 the same as IWAL ₀	23
ORA-IWAL ₁	C_0 the same as ORA-IWAL ₀	23

Good hyper-parameters of the algorithms often lie in the interior of these value ranges.

G.3 More Experimental Results

We provide detailed per-dataset results in Figures 4 to 7. Figures 4 and 5 show test error rates obtained by each algorithm using the best fixed hyper-parameter setting against number of label queries for small (fewer than 10^5 examples) and large (more than 10^5 examples) datasets. Figures 6 and 7 show results obtained by each algorithm using the best hyper-parameter setting for each dataset.

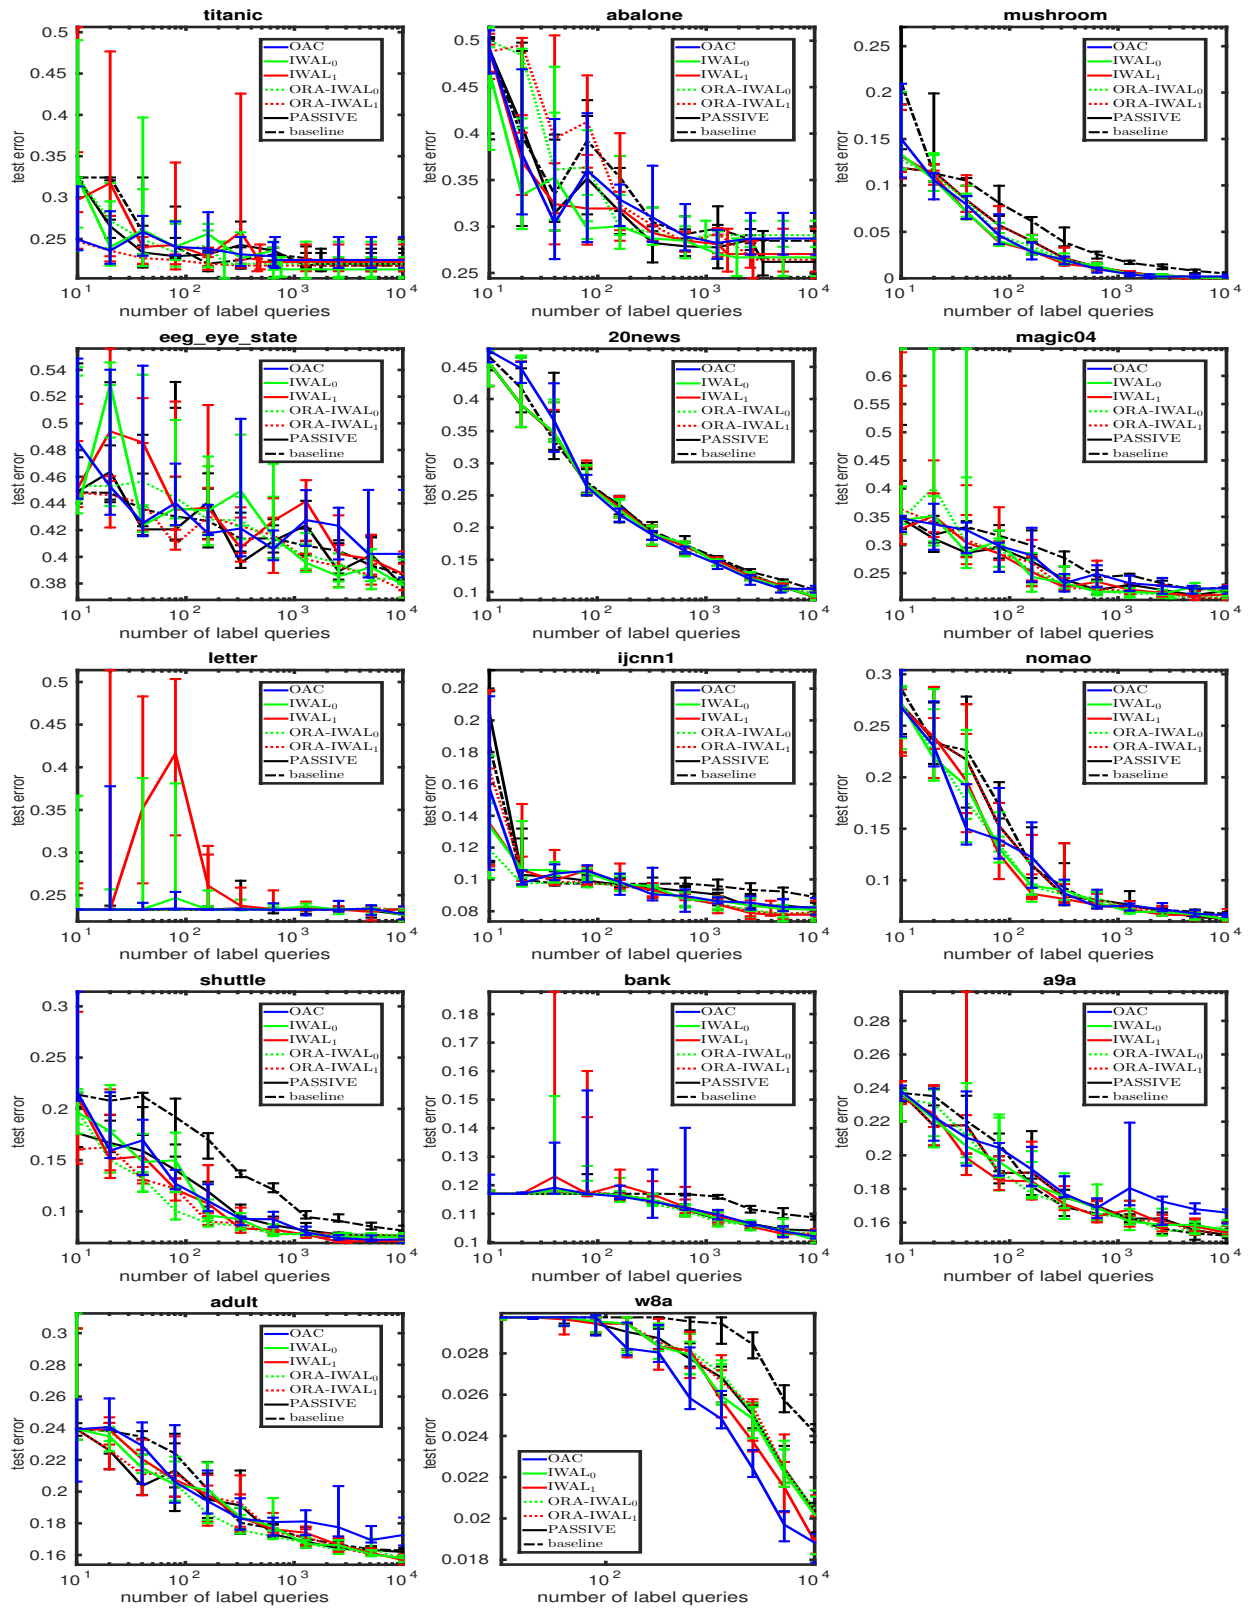


Figure 4: Test error under the best fixed hyper-parameter setting vs. number of label queries for datasets with fewer than 10^5 examples

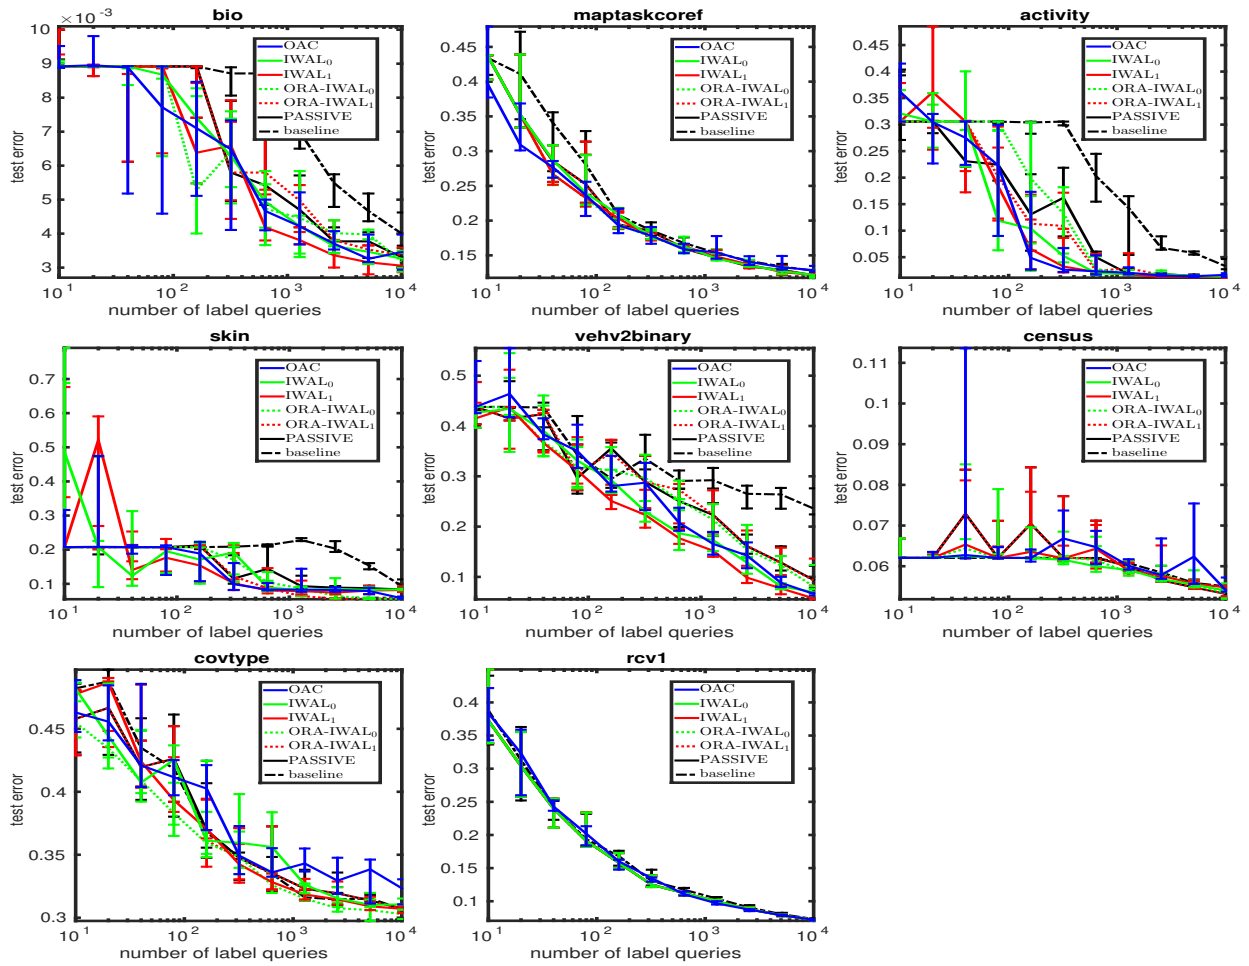


Figure 5: Test error under the best fixed hyper-parameter setting vs. number of label queries for datasets with more than 10^5 examples

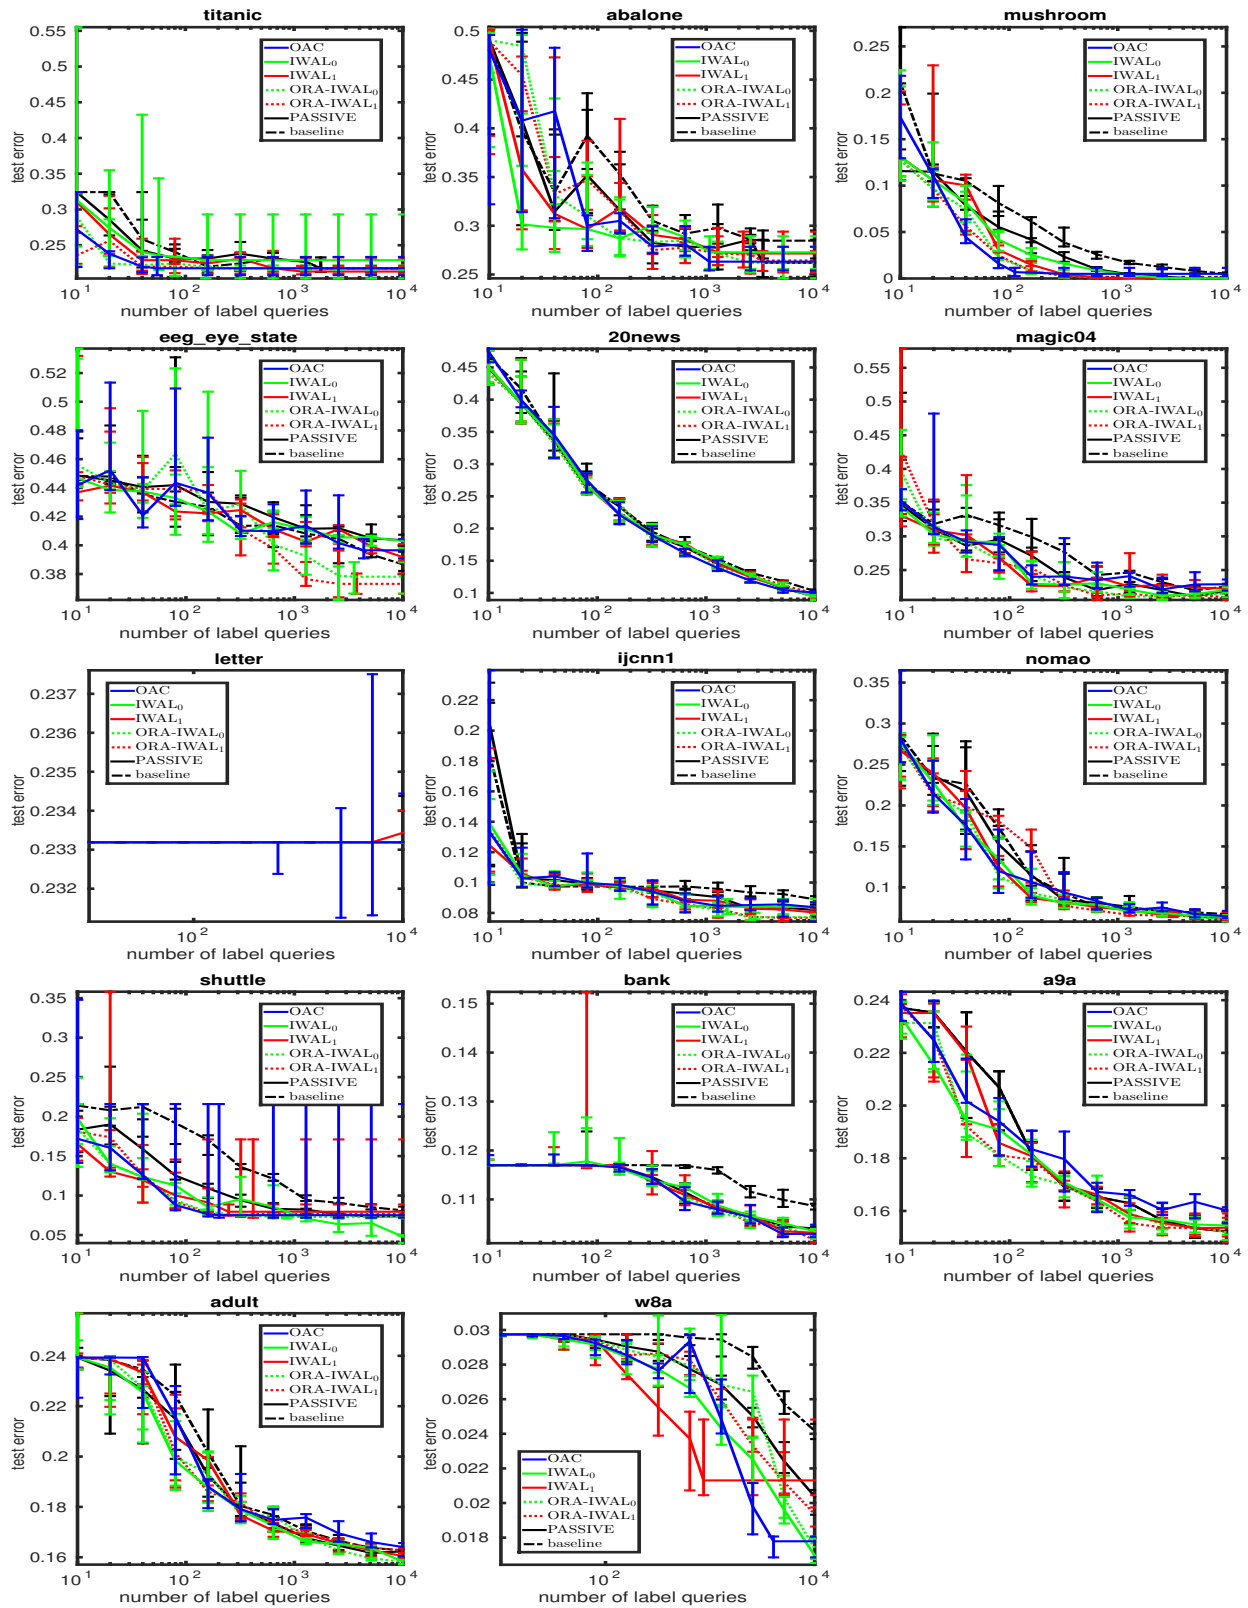


Figure 6: Test error under the best hyper-parameter setting for each dataset vs. number of label queries for datasets with fewer than 10^5 examples

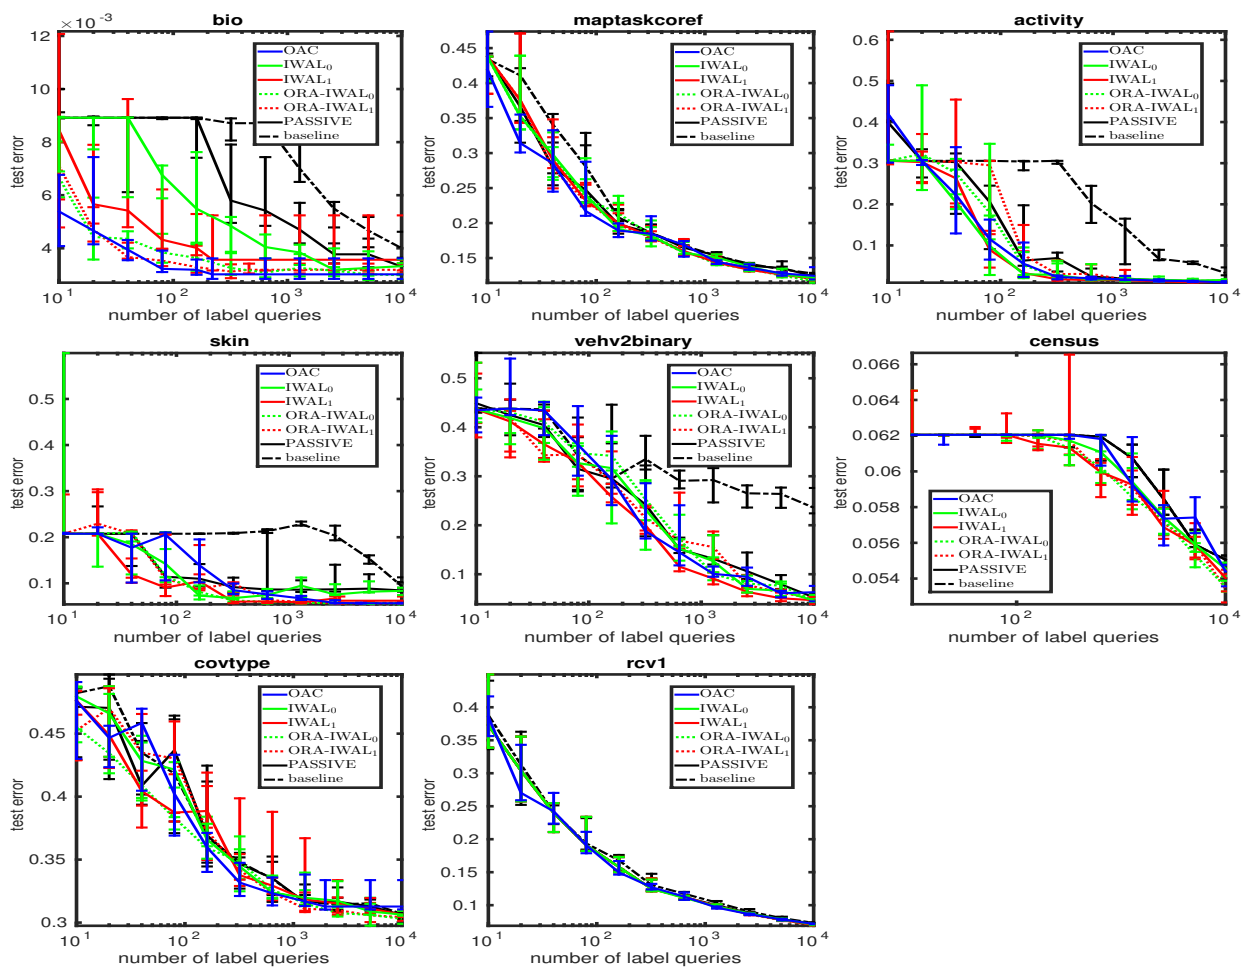


Figure 7: Test error under the best hyper-parameter setting for each dataset vs. number of label queries for datasets with more than 10^5 examples