


Browser Security Model


*original slides by prof. John Mitchell

Sampling of 2014 security incidents by attack type, time and impact

conjecture of relative breach impact is based on publicly disclosed information regarding leaked records and financial losses

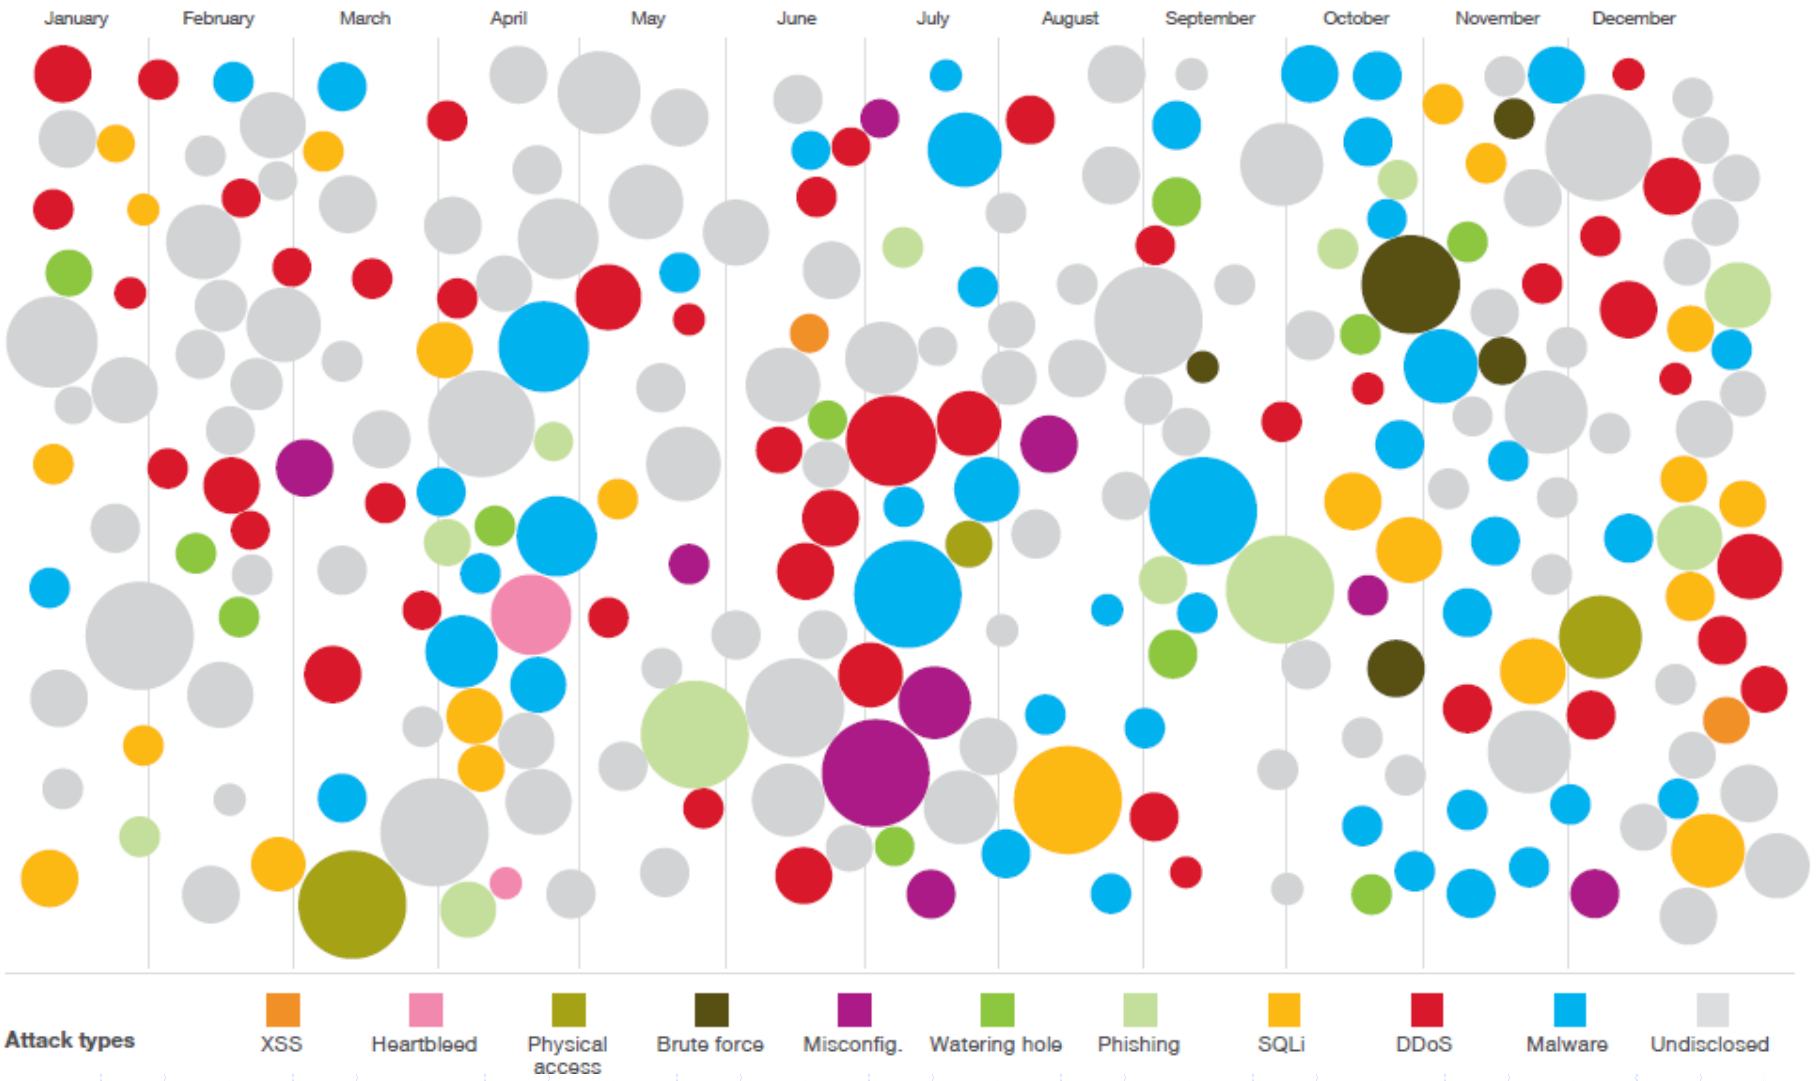

Web vs System vulnerabilities

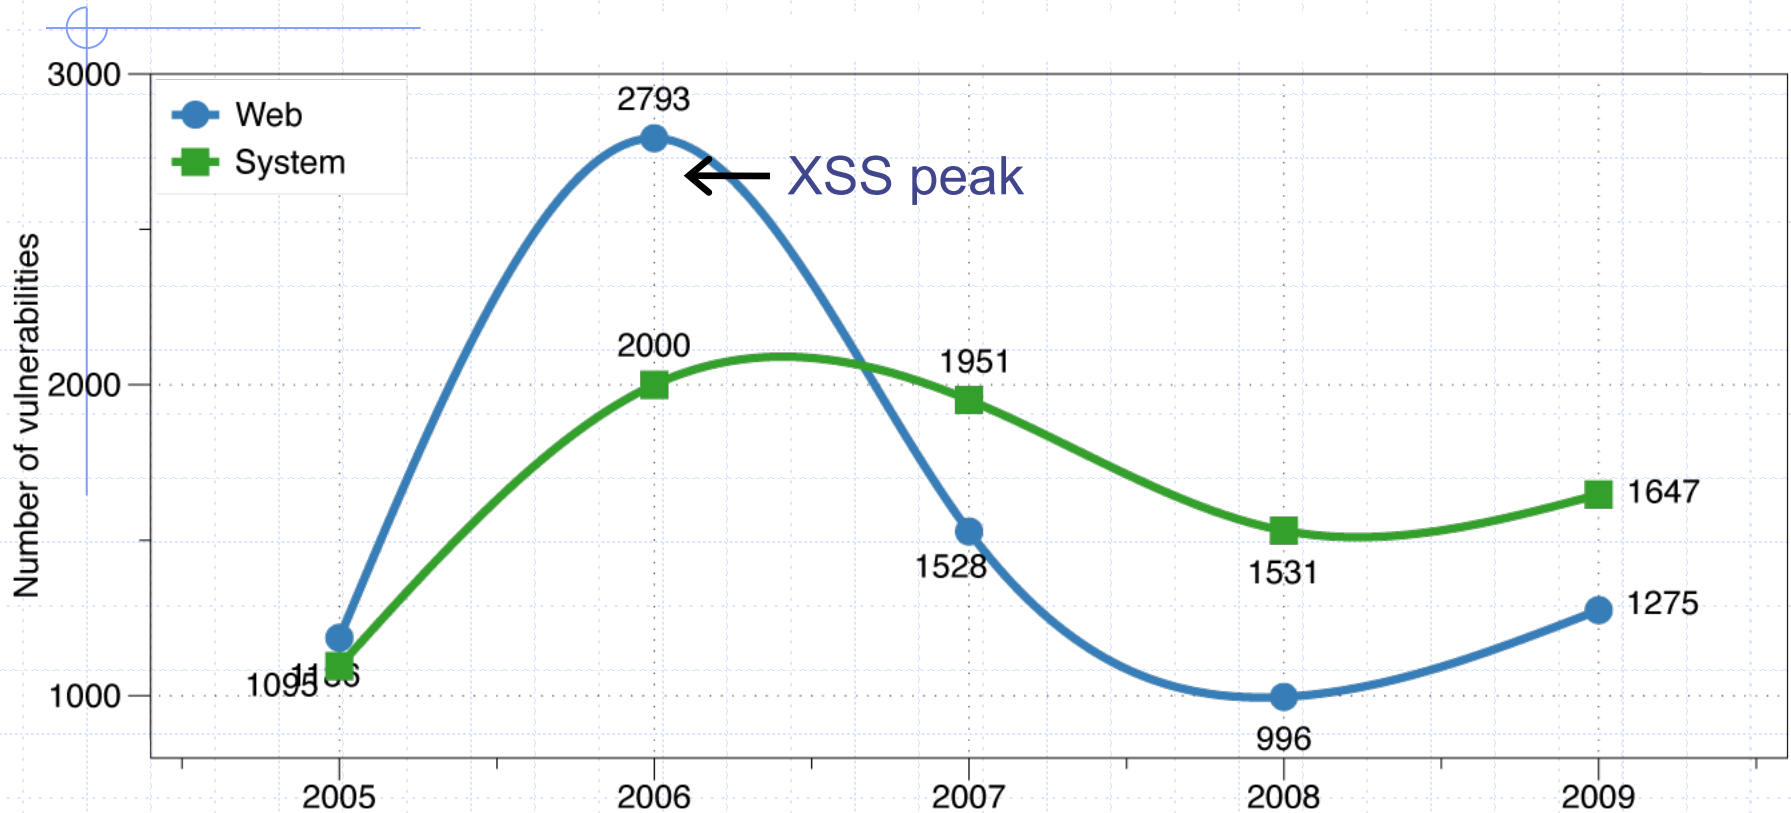


◆ Decline in % web vulns since 2009

- 49% in 2010 -> 37% in 2011.
- Big decline in SQL Injection vulnerabilities

Reported Web Vulnerabilities "In the Wild"


Evolution of the web vulnerabilities over the years by types

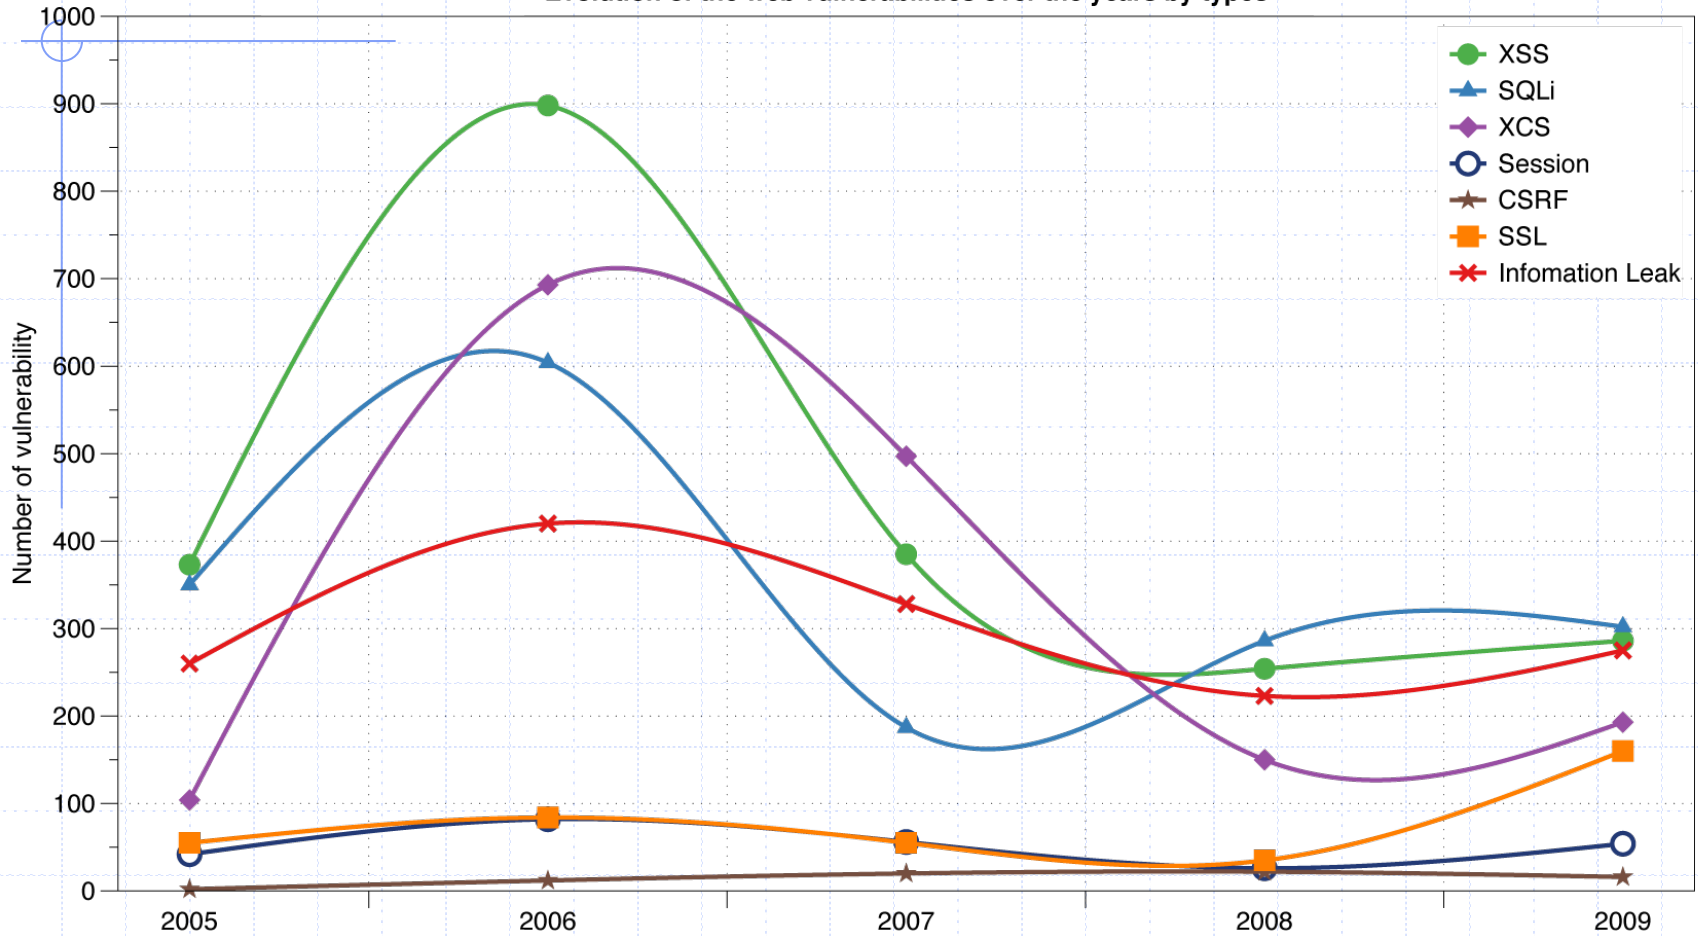

Data from aggregator and validator of NVD-reported vulnerabilities

Web Application Vulnerabilities by Attack Technique


2009-2013 H1

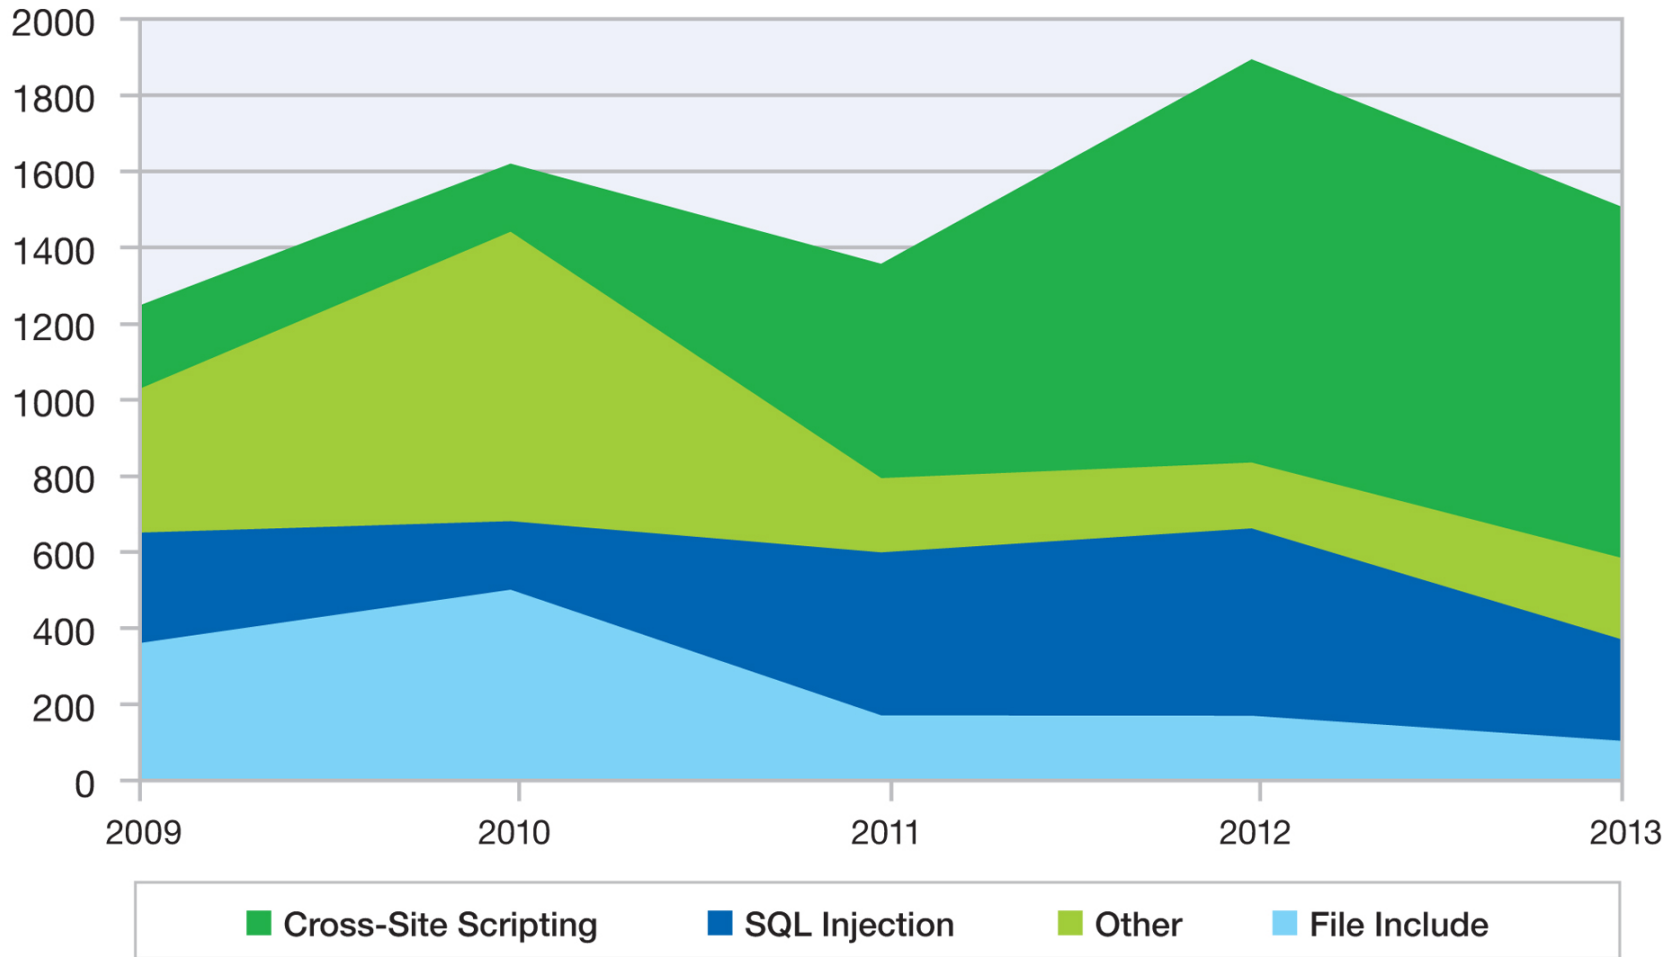


Source: IBM X-Force® Research and Development

Web application vulnerabilities

Web Application Vulnerabilities
as a Percentage of All Disclosures in 2010

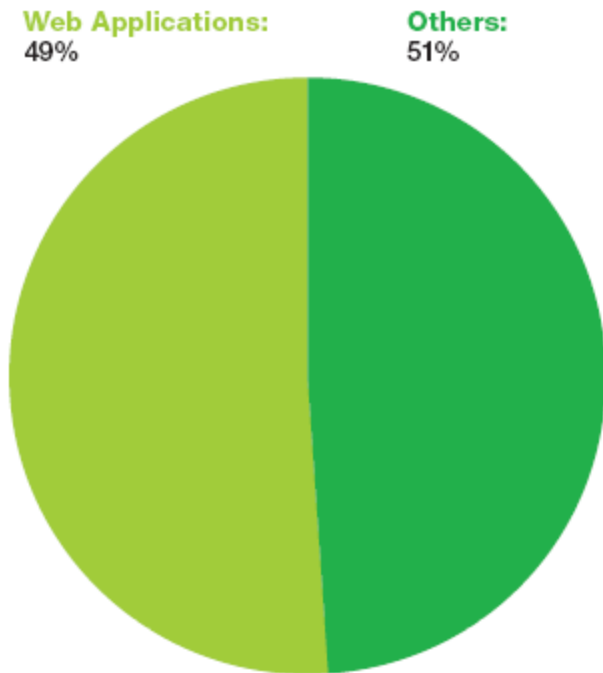

Web Application Vulnerabilities
as a Percentage of All Disclosures in 2011 H1

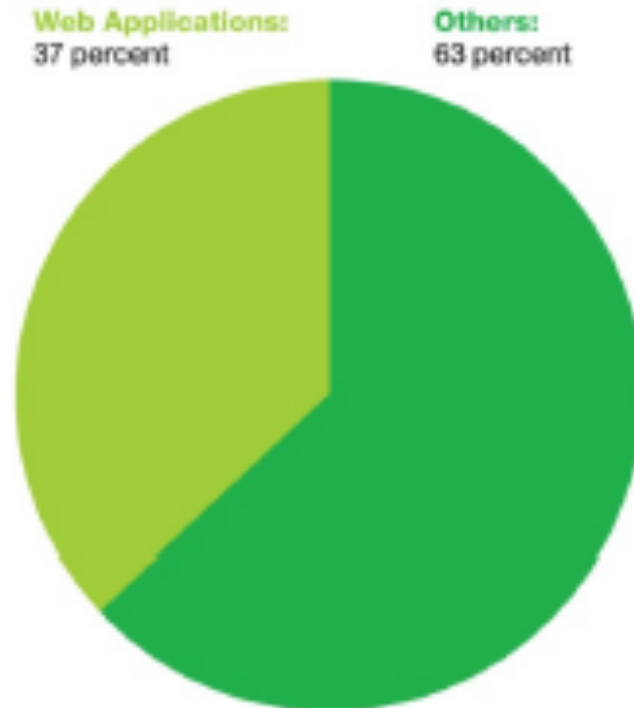

Five lectures on Web security

- ◆ Browser security model
 - The browser as an OS and execution platform
 - Protocols, isolation, communication, ...
- ◆ Web application security
 - Application pitfalls and defenses
- ◆ Content security policies
 - Additional mechanisms for sandboxing and security
- ◆ Authentication and session management
 - How users authenticate to web sites
 - Browser-server mechanisms for managing state
- ◆ HTTPS: goals and pitfalls
 - Network issues and browser protocol handling

Goals of web security


◆ Safely browse the web

- Users should be able to visit a variety of web sites, without incurring harm:
 - ◆ No stolen information
 - ◆ Site A cannot compromise session at Site B


◆ Support secure web applications

- Applications delivered over the web should be able to achieve the same security properties as stand-alone applications

Web security threat model


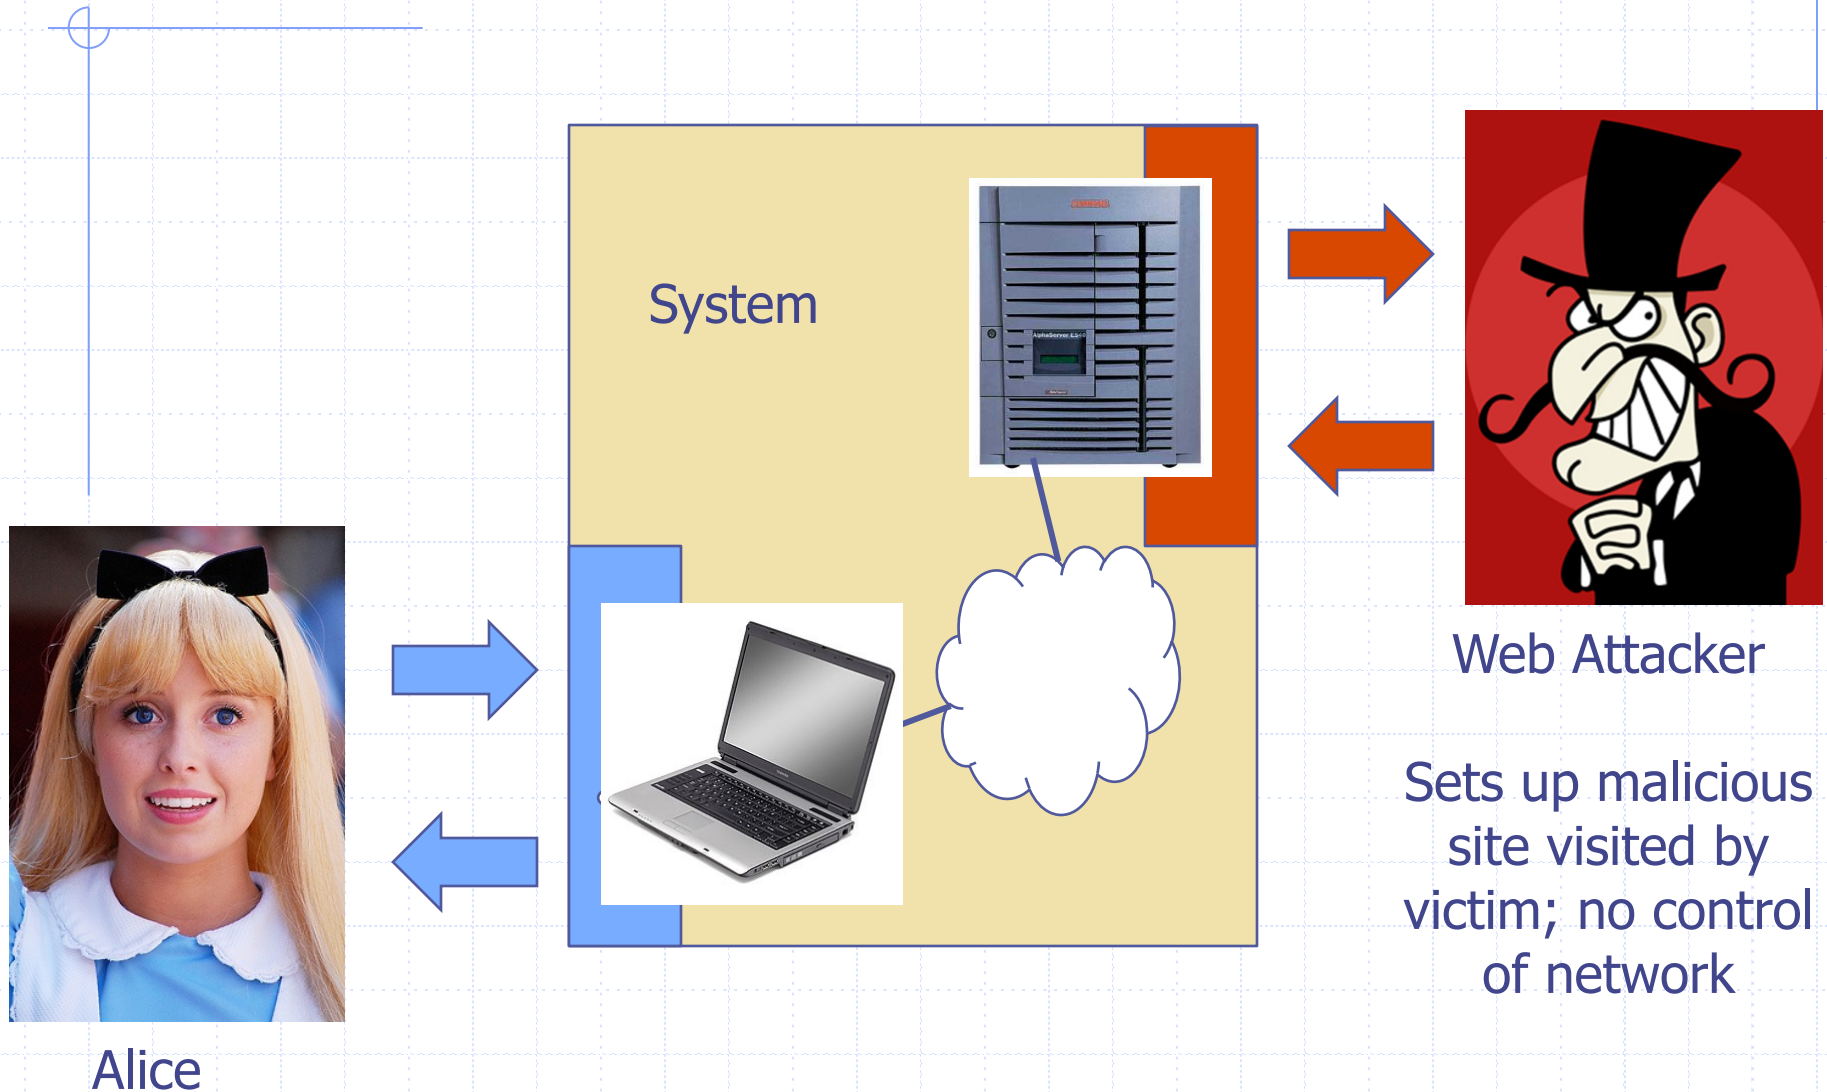


Network security threat model

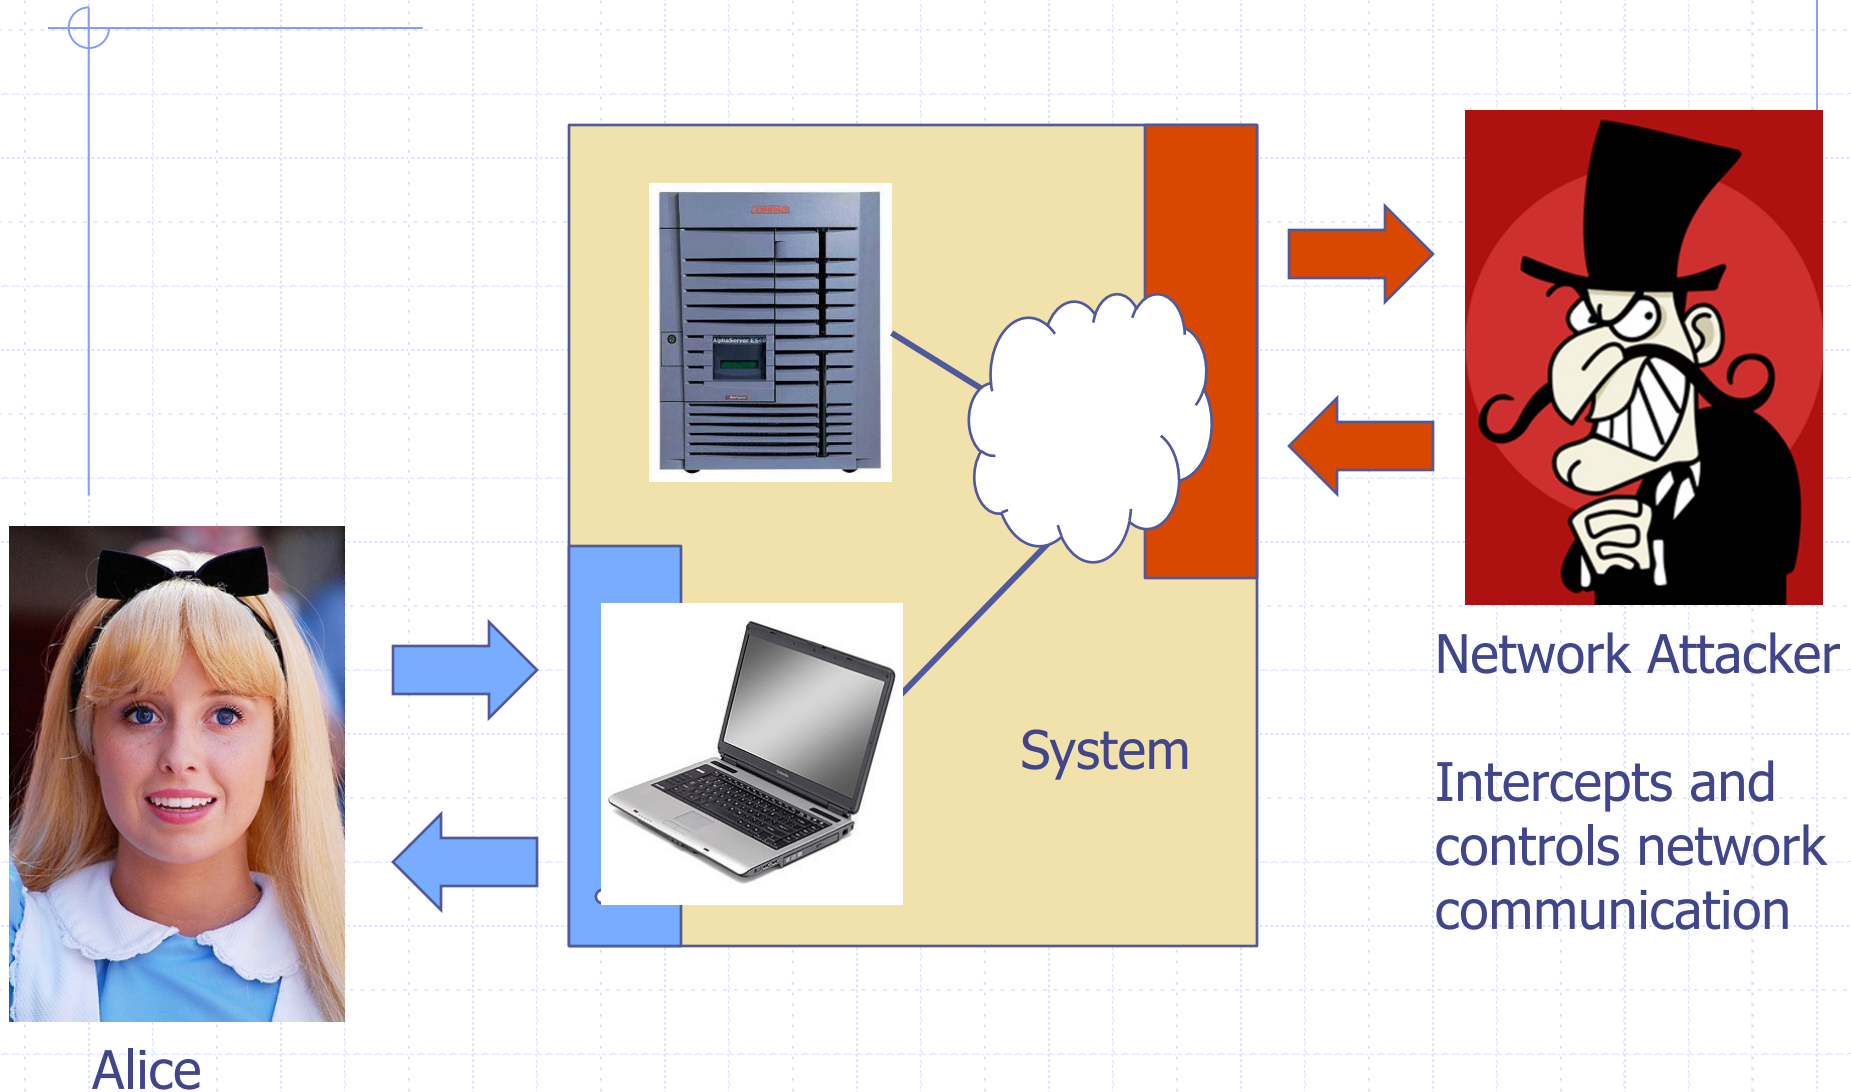




Alice

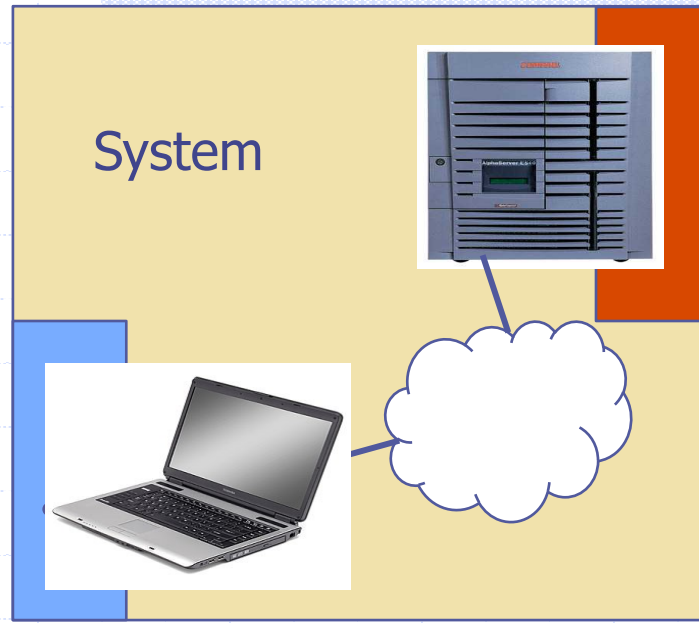



System

Web Attacker

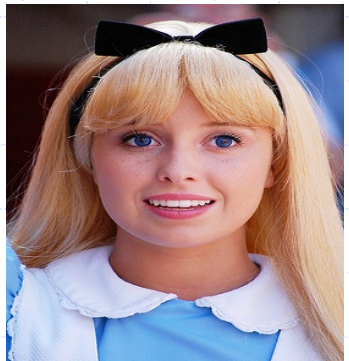

Alice

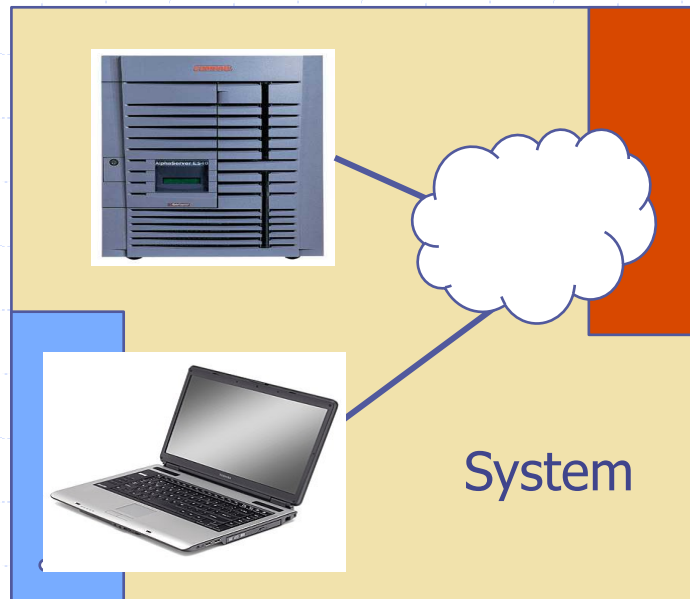

System

Network Attacker

Web Threat Models

◆ Web attacker

- Control attacker.com
- Can obtain SSL/TLS certificate for attacker.com
- User visits attacker.com
 - ◆ Or: runs attacker's Facebook app, etc.

◆ Network attacker

- Passive: Wireless eavesdropper
- Active: Evil router, DNS poisoning

◆ Malware attacker

- Attacker escapes browser isolation mechanisms and run separately under control of OS

Malware attacker


- ◆ Browsers may contain exploitable bugs
 - Often enable remote code execution by web sites
 - Google study: [the ghost in the browser 2007]
 - ◆ Found Trojans on 300,000 web pages (URLs)
 - ◆ Found adware on 18,000 web pages (URLs)

NOT OUR FOCUS IN THIS PART OF COURSE

- ◆ Even if browsers were bug-free, still lots of vulnerabilities on the web
 - *All* of the vulnerabilities on previous graph: XSS, SQLi, CSRF, ...

Outline

- ◆ Http
- ◆ Rendering content
- ◆ Isolation
- ◆ Communication
- ◆ Navigation
- ◆ Security User Interface
- ◆ Cookies
- ◆ Frames and frame busting

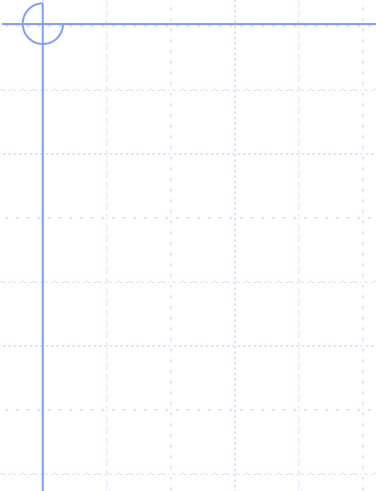


HTTP

URLs

◆ Global identifiers of network-retrievable documents

◆ **Example:**

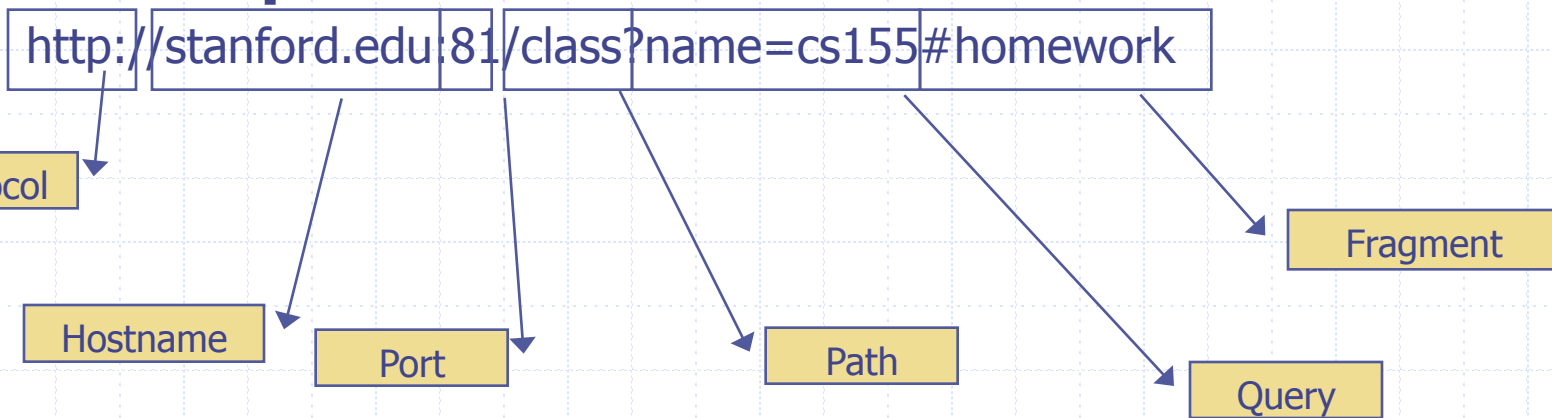

◆ Special characters are encoded as hex:

- `%0A` = newline
- `%20` or `+` = space, `%2B` = `+` (special exception)

HTTP Request

Method

File

HTTP version

Headers

```
GET /index.html HTTP/1.1
Accept: image/gif, image/x-bitmap, image/jpeg, */*
Accept-Language: en
Connection: Keep-Alive
User-Agent: Mozilla/1.22 (compatible; MSIE 2.0; Windows 95)
Host: www.example.com
Referer: http://www.google.com?q=dingbats
```


Blank line

Data – none for GET

GET : no side effect

POST : possible side effect

HTTP Response

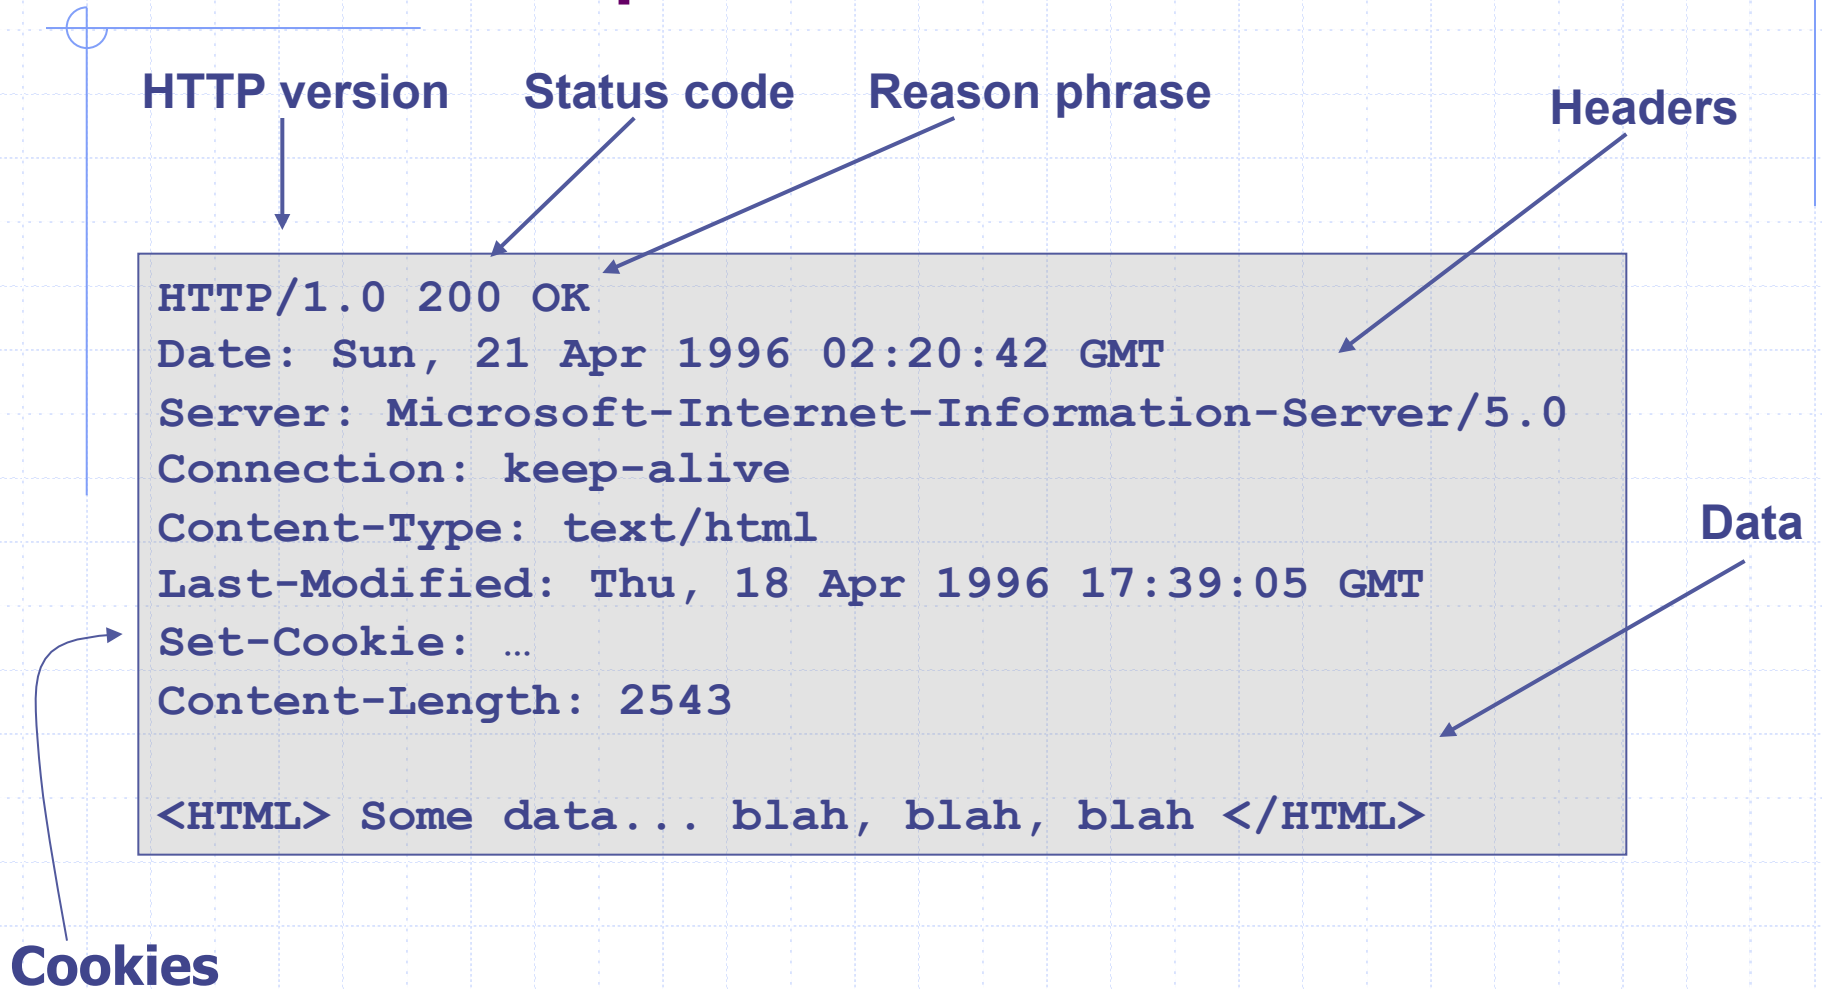



RENDERING CONTENT

Rendering and events

◆ Basic browser execution model

- Each browser window or frame
 - ◆ Loads content
 - ◆ Renders it
 - Processes HTML and scripts to display page
 - May involve images, subframes, etc.
 - ◆ Responds to events

◆ Events can be

- User actions: `OnClick`, `OnMouseover`
- Rendering: `OnLoad`, `OnBeforeUnload`
- Timing: `setTimeout()`, `clearTimeout()`

Example

```
<!DOCTYPE html>
```

```
<html>
```

```
<body>
```

```
<h1>My First Web Page</h1>
```

```
<p>My first paragraph.</p>
```

```
<button onclick="document.write(5 + 6)">Try it</button>
```

```
</body>
```

```
</html>
```

Document Object Model (DOM)

- ◆ Object-oriented interface used to read and write docs
 - web page in HTML is structured data
 - DOM provides representation of this hierarchy
- ◆ Examples
 - **Properties:** `document.alinkColor`, `document.URL`, `document.forms[]`, `document.links[]`, `document.anchors[]`
 - **Methods:** `document.write(document.referrer)`
- ◆ Includes Browser Object Model (BOM)
 - `window`, `document`, `frames[]`, `history`, `location`, `navigator` (type and version of browser)

Example

```
<!DOCTYPE html>
```

```
<html>
```

```
<body>
```

```
<h1>My First Web Page</h1>
```

```
<p>My First Paragraph</p>
```

```
<p id="demo"></p>
```

```
<script>
```

```
document.getElementById("demo").innerHTML = 5 + 6;
```

```
</script>
```

```
</body>
```

```
</html>
```


Changing HTML using Script, DOM

◆ Some possibilities

- createElement(elementName)
- createTextNode(text)
- appendChild(newChild)
- removeChild(node)

HTML

```
<ul id="t1">  
<li> Item 1 </li>  
</ul>
```

◆ Example: Add a new list item:

```
var list = document.getElementById('t1')  
var newitem = document.createElement('li')  
var newtext = document.createTextNode(text)  
list.appendChild(newitem)  
newitem.appendChild(newtext)
```

HTML Image Tags

```
<html>
```

```
  <p> ... </p>
```

```
  
```

```
</html>
```

Displays this nice picture →
Security issues?



Image tag security issues

- ◆ Communicate with other sites
 - ``
- ◆ Hide resulting image
 - ``
- ◆ Spoof other sites
 - Add logos that fool a user

Important Point: A web page can send information to any site

Q: what threat model are we talking about here?

JavaScript onError

◆ Basic function

- Triggered when error occurs loading a document or an image

◆ Example

```

```

- Runs onError handler if image does not exist and cannot load

JavaScript timing

◆ Sample code


```
<html><body><img id="test" style="display: none">
<script>
  var test = document.getElementById('test');
  var start = new Date();
  test.onerror = function() {
    var end = new Date();
    alert("Total time: " + (end - start));
  }
  test.src = "http://www.example.com/page.html";
</script>
</body></html>
```

- When response header indicates that page is not an image, the browser stops and notifies JavaScript via the onerror handler.

Port scanning behind firewall

◆ JavaScript can:

- Request images from internal IP addresses
 - ◆ Example: ``
- Use timeout/onError to determine success/failure
- Fingerprint webapps using known image names

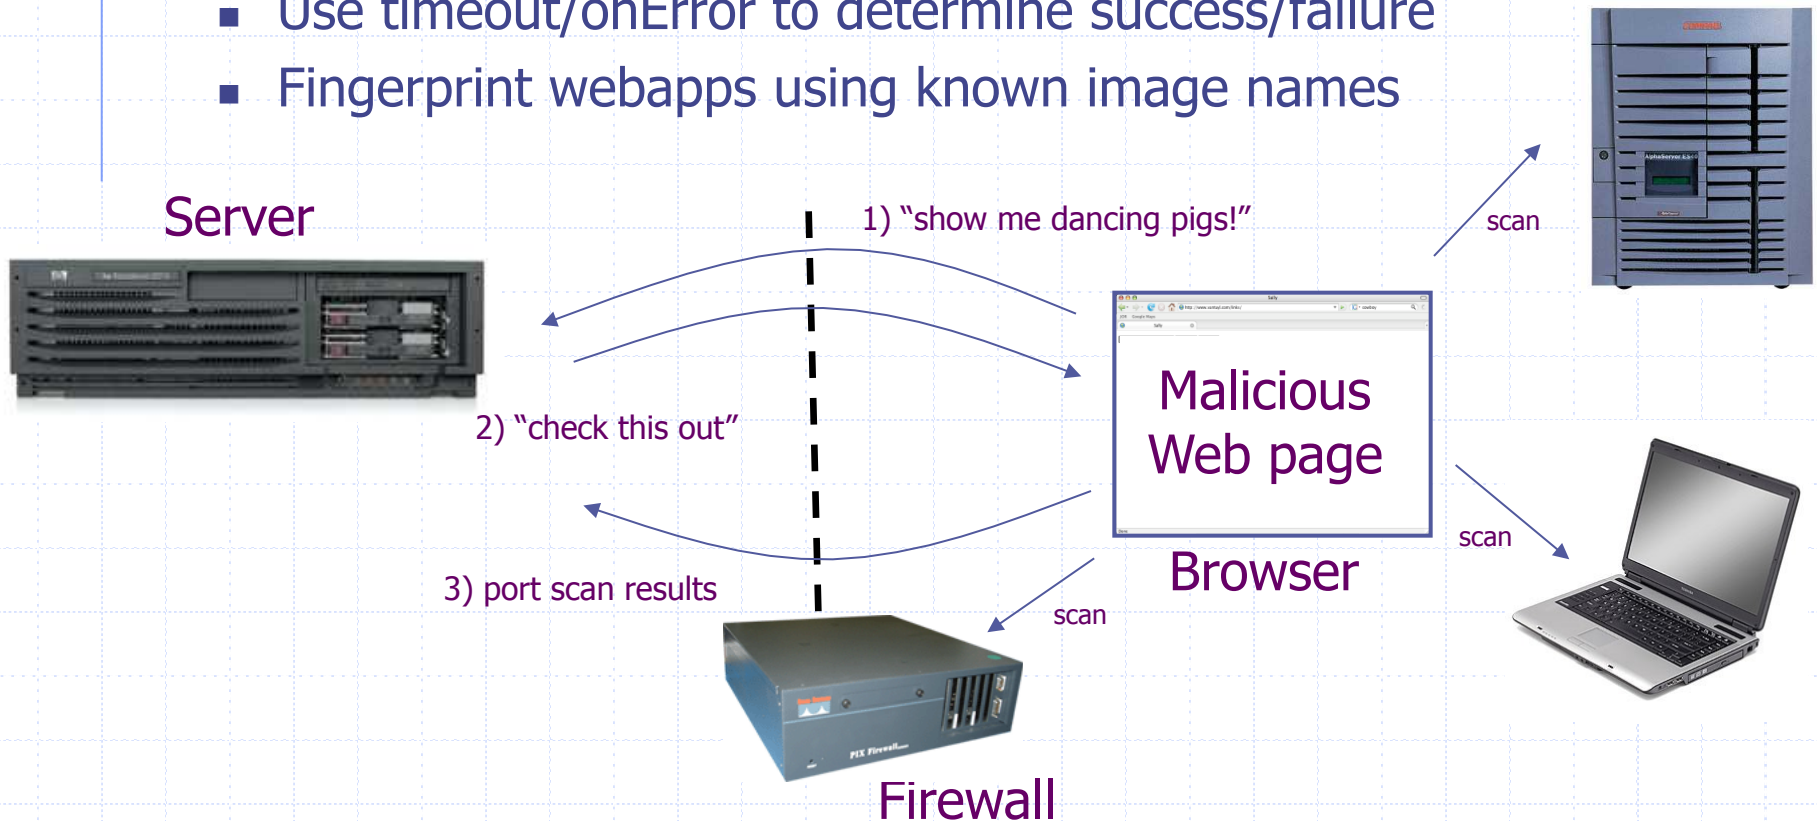

Remote scripting

◆ Goal

- Exchange data between a client-side app running in a browser and server-side app, without reloading page

◆ Methods

- Java Applet/ActiveX control/Flash
 - ◆ Can make HTTP requests and interact with client-side JavaScript code, but requires LiveConnect (not available on all browsers)
- XML-RPC
 - ◆ open, standards-based technology that requires XML-RPC libraries on server and in your client-side code.
- Simple HTTP via a hidden IFRAME
 - ◆ IFRAME with a script on your web server (or database of static HTML files) is by far the easiest of the three remote scripting options

Important Point: A page can maintain bi-directional communication with browser (until user closes/quits)

See: <http://developer.apple.com/internet/webcontent/iframe.html>

Simple remote scripting example

client.html: "RPC" by passing arguments to server.html in query string

```
<script type="text/javascript">
function handleResponse() {
    alert('this function is called from server.html') }
</script>
<iframe id="RSIFrame"    name="RSIFrame"
    style="width:0px; height:0px; border: 0px"
    src="blank.html">
</iframe>
<a href="server.html" target="RSIFrame">make RPC call</a>
```

server.html: another page on same server, could be server.php, etc

```
<script type="text/javascript">
    window.parent.handleResponse()
</script>
```

RPC can be done silently in JavaScript, passing and receiving arguments



ISOLATION

Frame and iFrame

- ◆ Window may contain frames from different sources
 - Frame: rigid division as part of frameset
 - iFrame: floating inline frame
- ◆ iFrame example


```
<iframe src="hello.html" width=450 height=100>
```

If you can see this, your browser doesn't understand IFRAME.

```
</iframe>
```

- ◆ Why use frames?
 - Delegate screen area to content from another source
 - Browser provides isolation based on frames
 - Parent may work even if frame is broken

Windows Interact

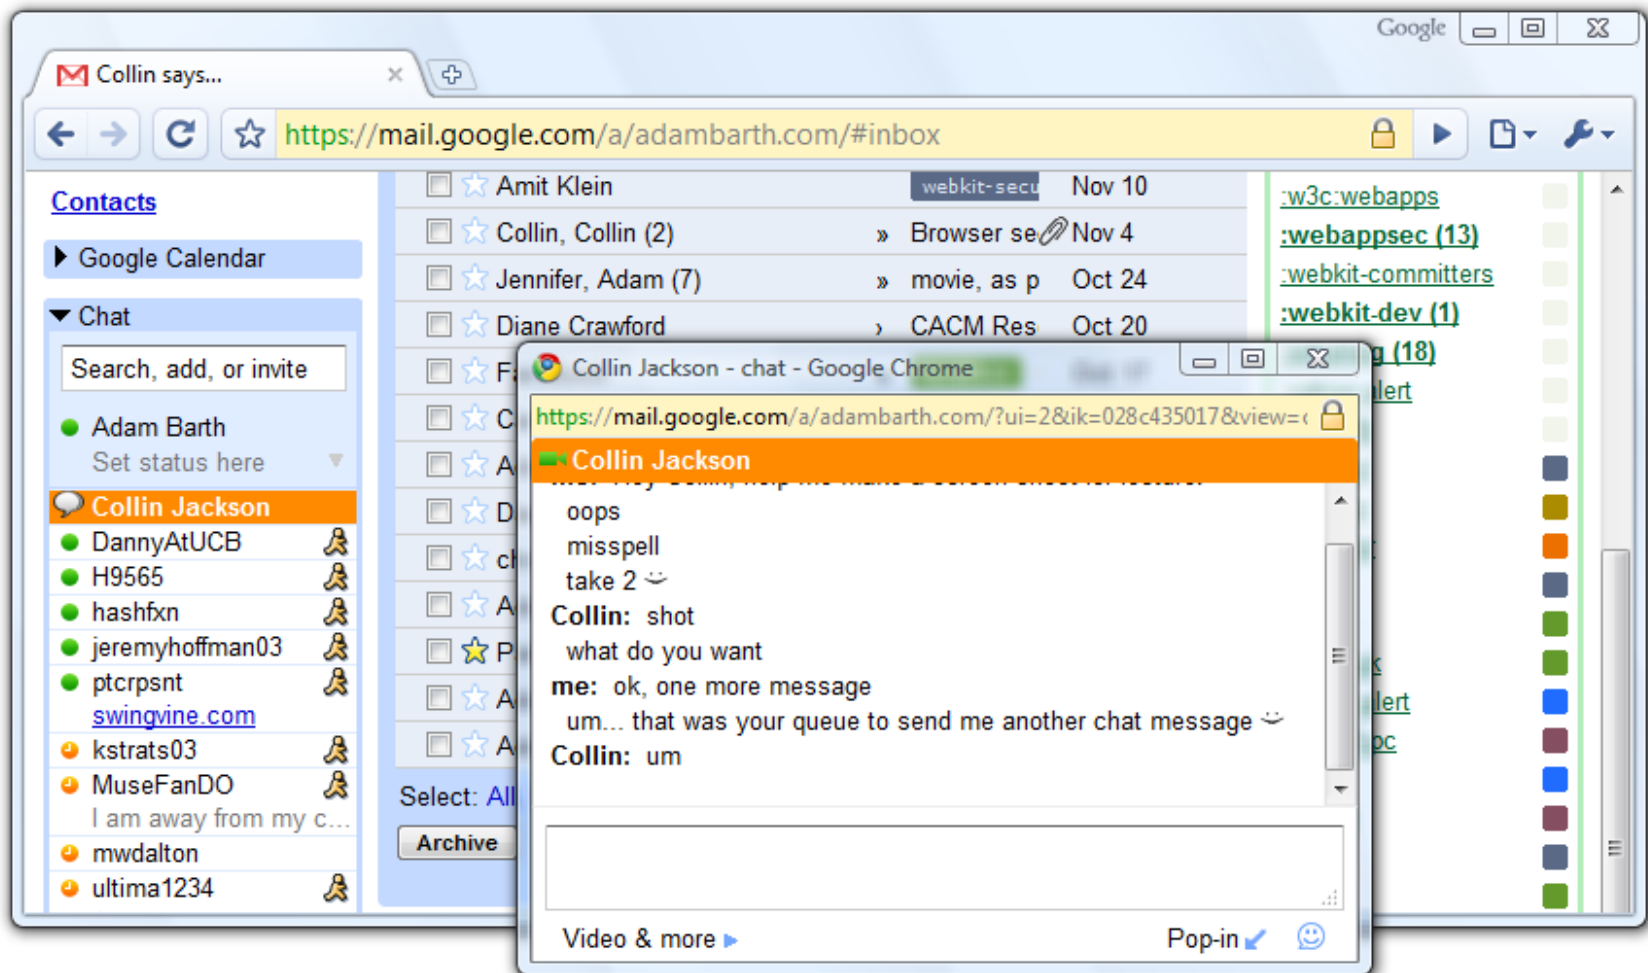

Analogy

Operating system

◆ Primitives

- System calls
- Processes
- Disk

◆ Principals: Users

- Discretionary access control

◆ Vulnerabilities

- Buffer overflow
- Root exploit

Web browser

◆ Primitives

- Document object model
- Frames
- Cookies / localStorage

◆ Principals: "Origins"

- Mandatory access control

◆ Vulnerabilities

- Cross-site scripting
- Cross-site request forgery
- Cache history attacks
- ...

Policy Goals

◆ Safe to visit an evil web site



◆ Safe to visit two pages at the same time


- Address bar distinguishes them



◆ Allow safe delegation



Browser security mechanism

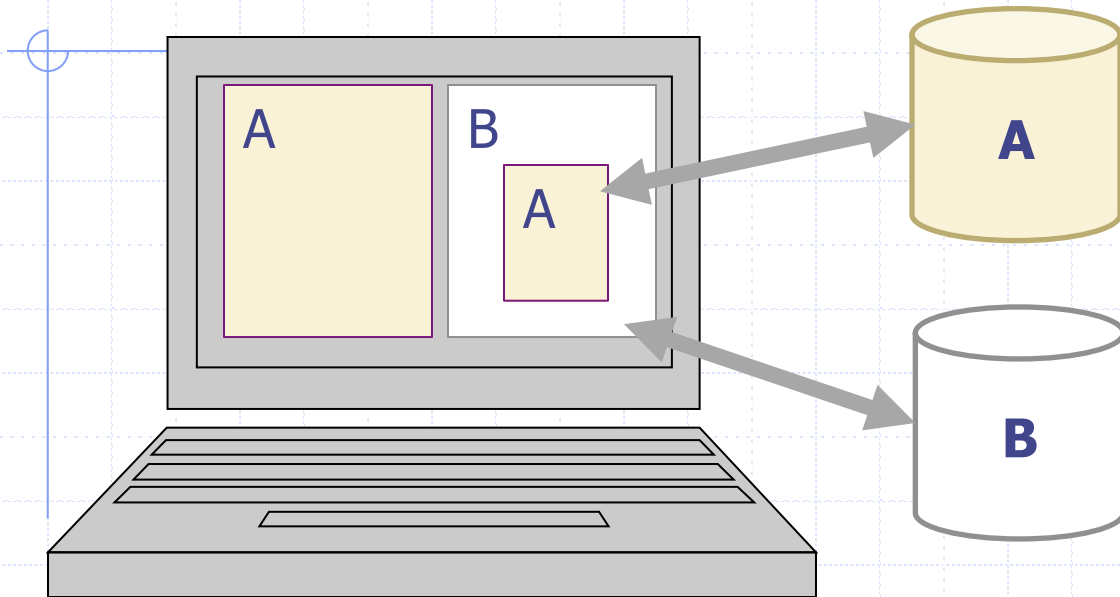

- ◆ Each frame of a page has an origin
 - Origin = protocol://host:port
- ◆ Frame can access its own origin
 - Network access, Read/write DOM, Storage (cookies)
- ◆ Frame cannot access data associated with a different origin

Components of browser security policy

◆ Frame-Frame relationships

- `canScript(A,B)`
 - ◆ Can Frame A execute a script that manipulates arbitrary/nontrivial DOM elements of Frame B?
- `canNavigate(A,B)`
 - ◆ Can Frame A change the origin of content for Frame B?

◆ Frame-principal relationships

- `readCookie(A,S), writeCookie(A,S)`
 - ◆ Can Frame A read/write cookies from site S?

See <https://code.google.com/p/browsersec/wiki/Part1>
<https://code.google.com/p/browsersec/wiki/Part2>

Library import excluded from SOP


```
<script src=https://seal.verisign.com/getseal?  
host_name=a.com></script>
```



- Script has privileges of imported page, NOT source server.
- Can script other pages in this origin, load more scripts
- Other forms of importing




Domain Relaxation

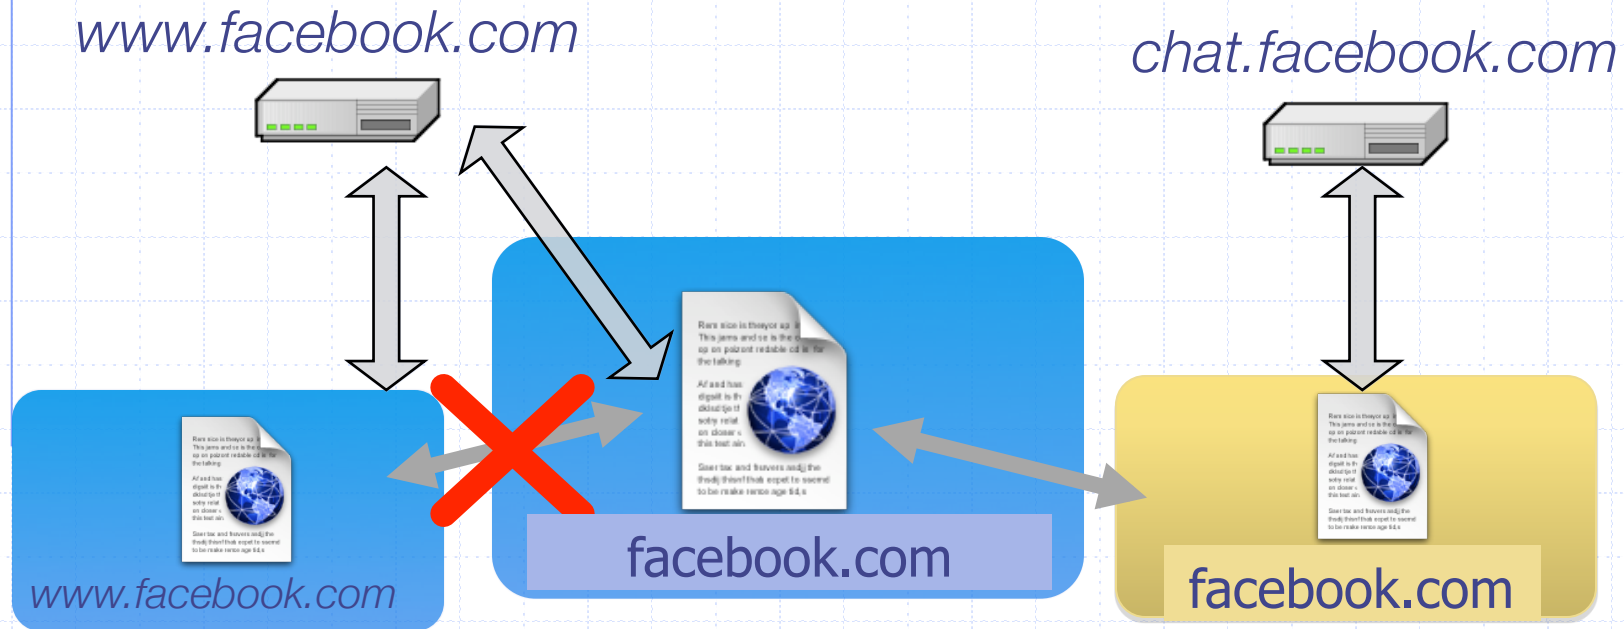

- ◆ Origin: scheme, host, (port), hasSetDomain
- ◆ Try `document.domain = document.domain`

Additional mechanisms

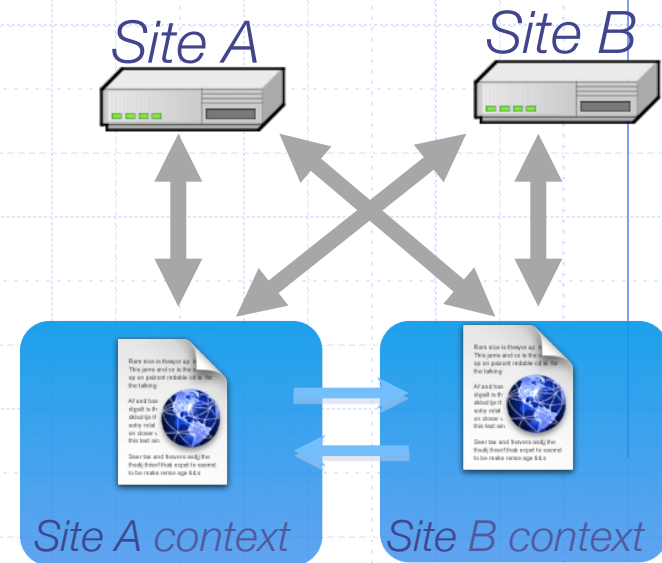

Cross-origin network requests

- Access-Control-Allow-Origin: <list of domains>
- Access-Control-Allow-Origin: *

Cross-origin client side communication

- Client-side messaging via navigation (old browsers)
- postMessage (modern browsers)




COMMUNICATION

window.postMessage

- ◆ API for inter-frame communication
 - Supported in standard browsers



- A network-like channel between frames

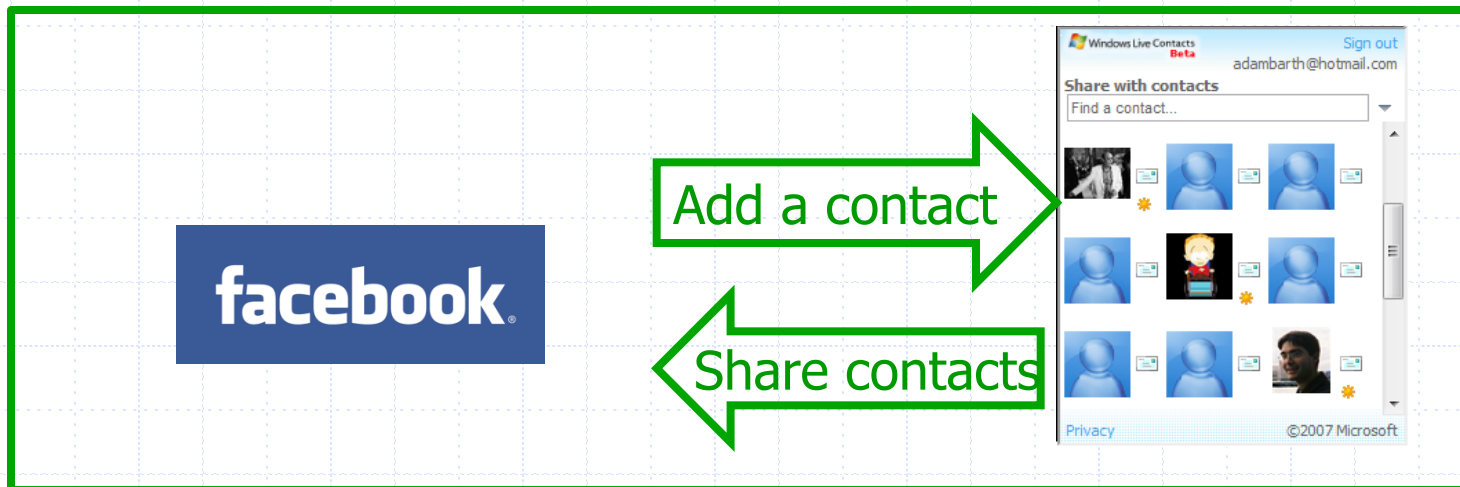

postMessage syntax

```
frames[0].postMessage("Attack at dawn!",  
                      "http://b.com/");
```

```
window.addEventListener("message", function (e) {  
  if (e.origin == "http://a.com") {  
    ... e.data ... }  
}, false);
```



Attack at dawn!





Why include "targetOrigin"?

◆ What goes wrong?

```
frames[0].postMessage("Attack at dawn!");
```

◆ Messages sent to *frames*, not principals

- When would this happen?

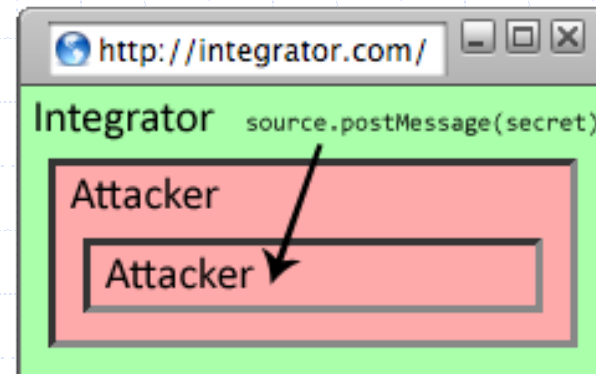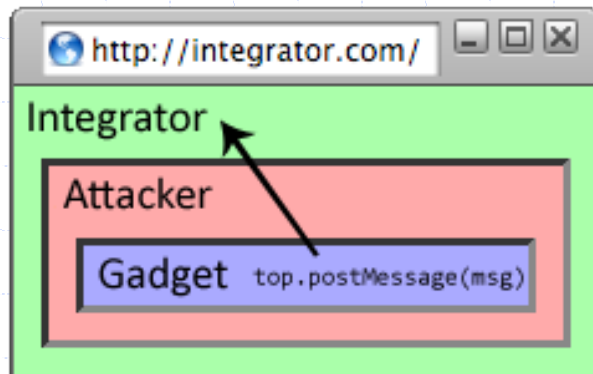



NAVIGATION

A Guninski Attack

Welcome to AdSense - Windows Internet Explorer

https://www.google.com/adsense/login/en_US/

Google

Welcome to AdSense

English (US) Help Center

Google AdSense

Earn money from relevant ads on your website
Google AdSense matches ads to your site's content, and you earn money whenever your visitors click on them.


Sign up now

awglogin


Existing AdSense users:
Sign in to Google AdSense with your
Google
Email

I cannot access my account





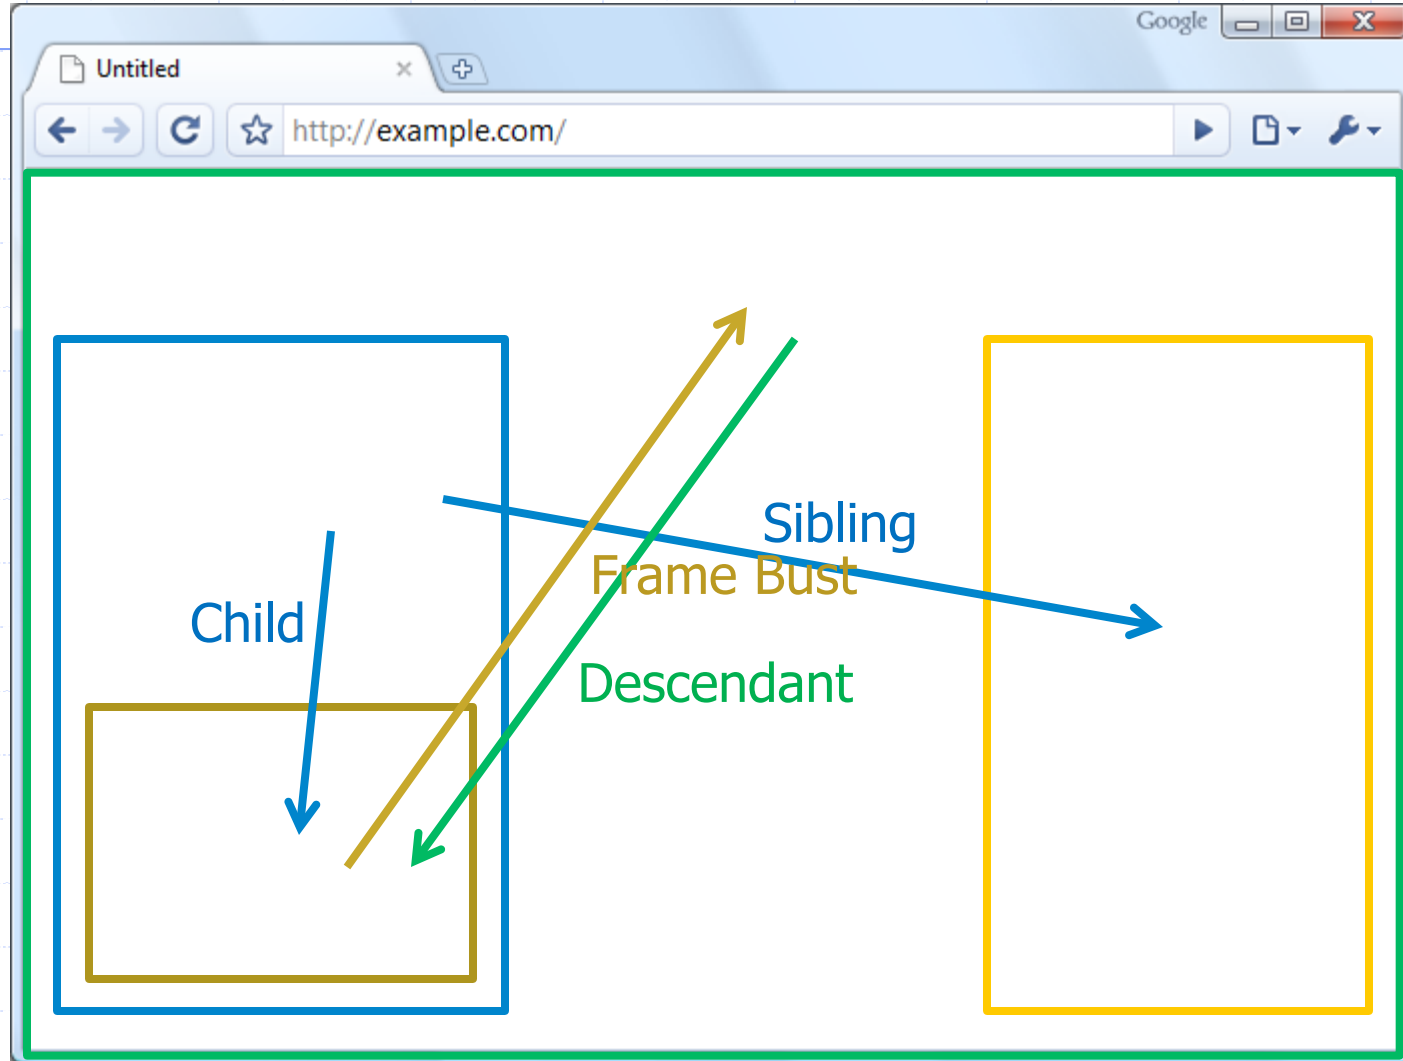



```
window.open("https://attacker.com/", "awglogin");
```




What should the policy be?



Legacy Browser Behavior





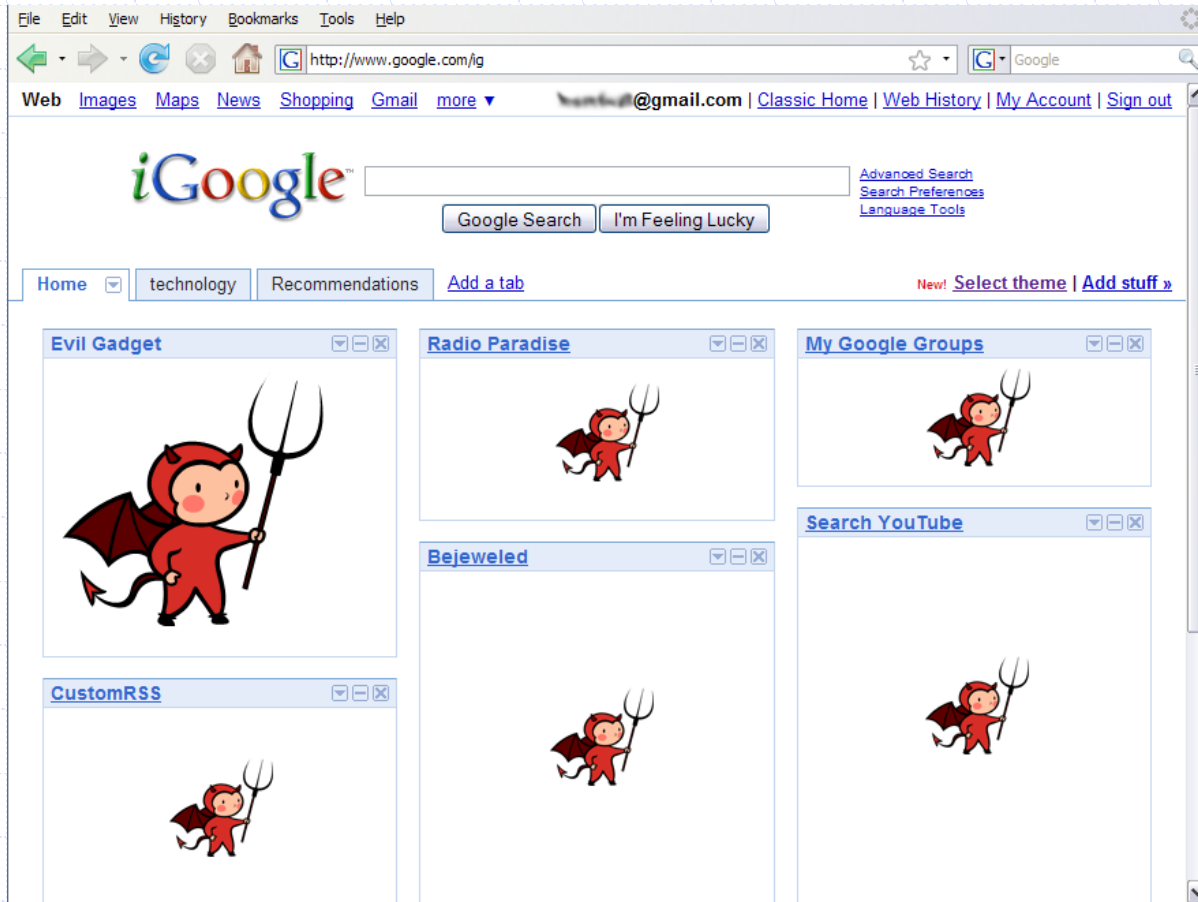



Browser	Policy
 IE 6 (default)	Permissive
 IE 6 (option)	Child
 IE7 (no Flash)	Descendant
 IE7 (with Flash)	Permissive
 Firefox 2	Window
 Safari 3	Permissive
 Opera 9	Window
 HTML 5	Child

Window Policy Anomaly









`...com/...";`
`...com/...";`

Legacy Browser Behavior

Browser	Policy
 IE 6 (default)	Permissive
 IE 6 (option)	Child
 IE7 (no Flash)	Descendant
 IE7 (with Flash)	Permissive
 Firefox 2	Window
 Safari 3	Permissive
 Opera 9	Window
 HTML 5	Child

Adoption of Descendant Policy


Browser	Policy
 IE7 (no Flash)	Descendant
 IE7 (with Flash)	Descendant
 Firefox 3	Descendant
 Safari 3	Descendant
 Opera 9	(many policies)
 HTML 5	Descendant




When is it safe to type my password?

SECURITY USER INTERFACE



Safe to type your password?

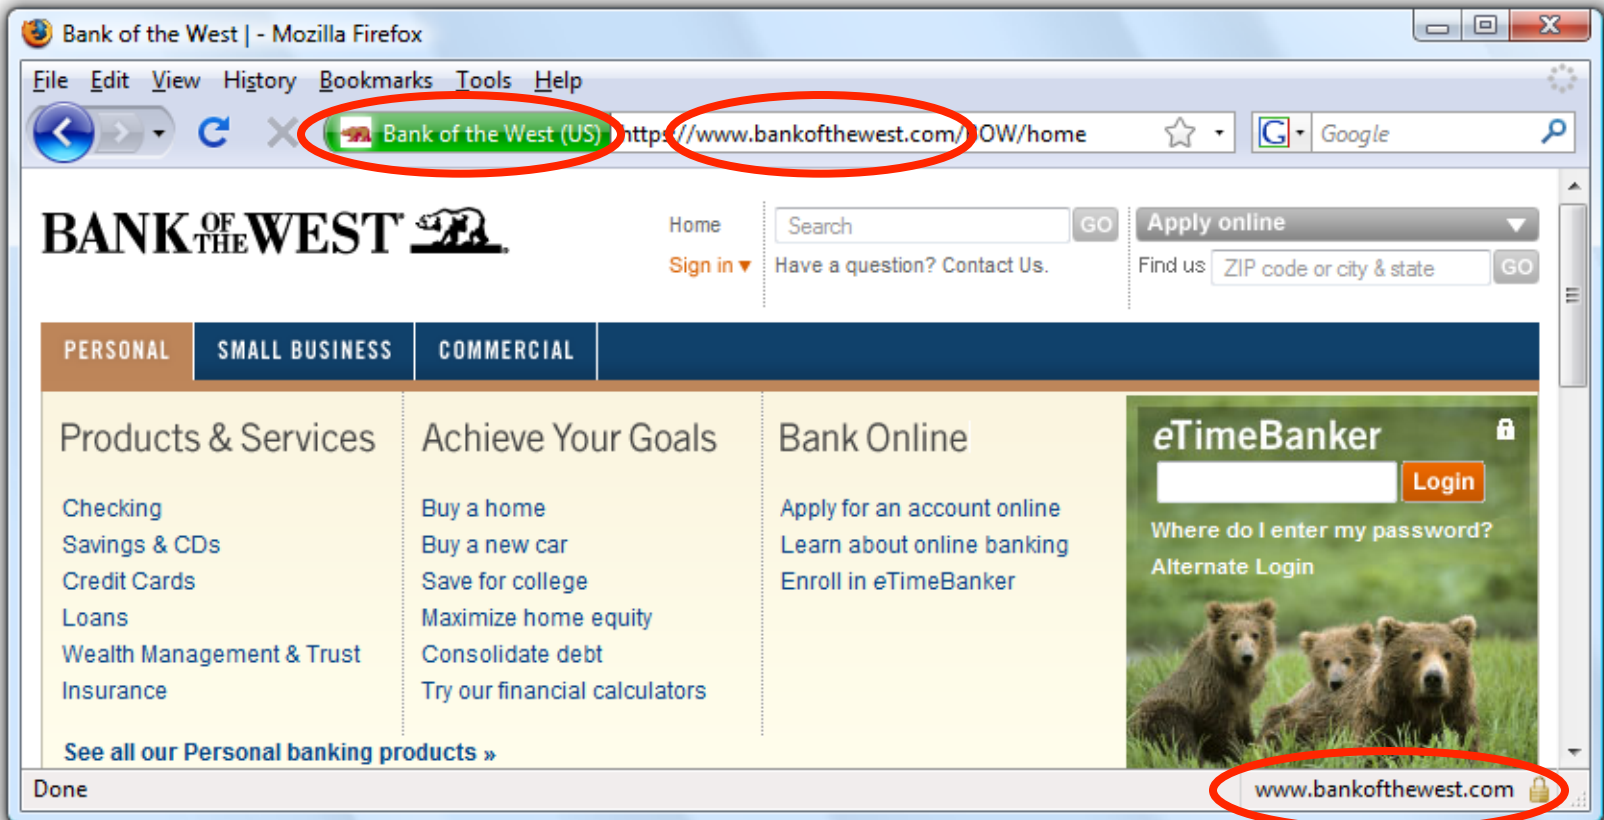


Safe to type your password?

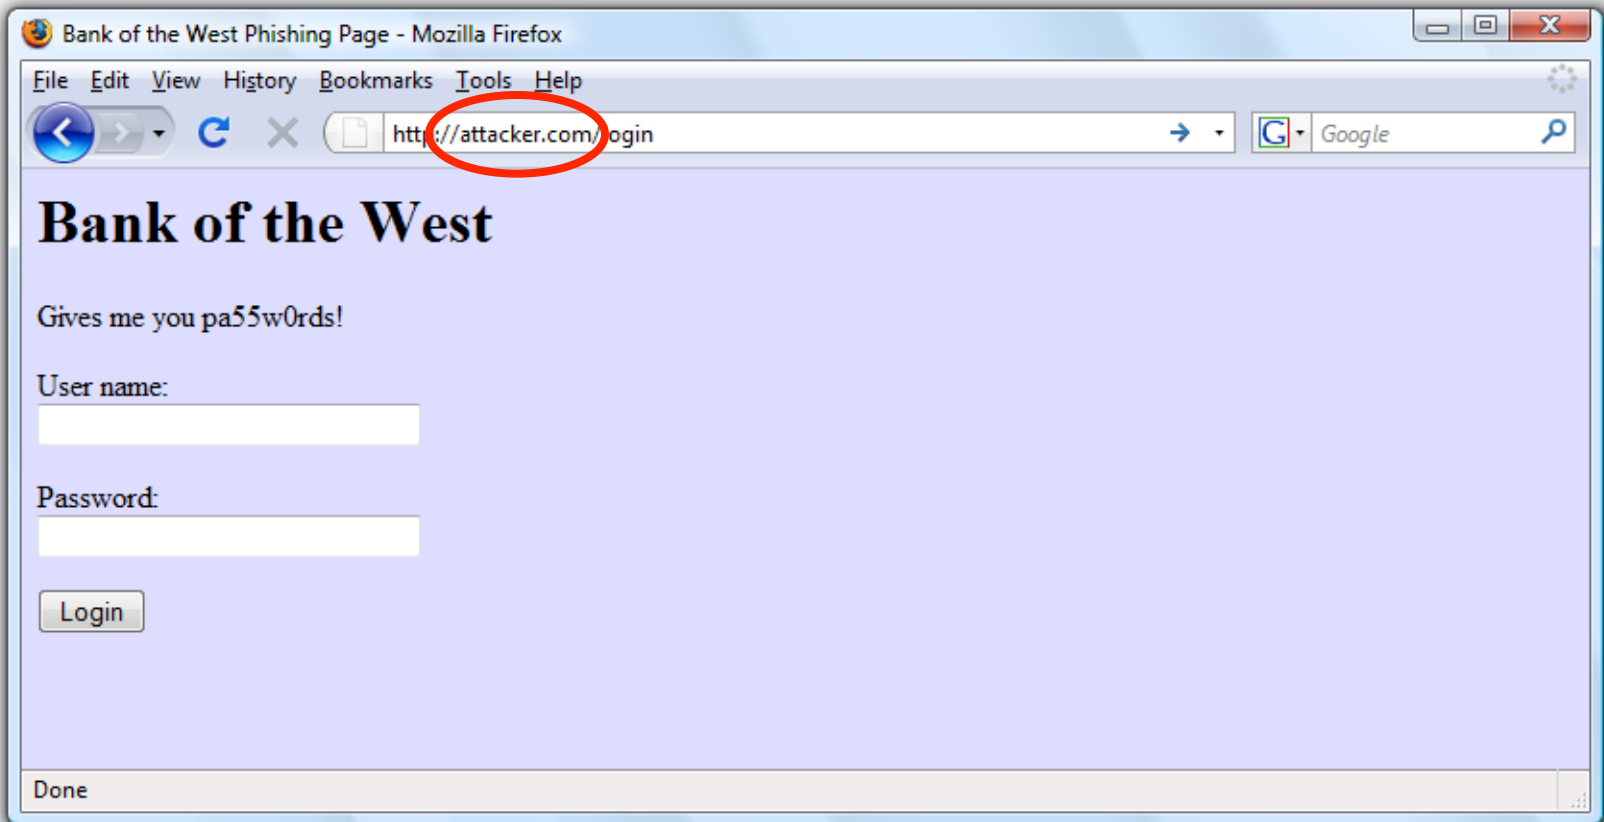

Safe to type your password?

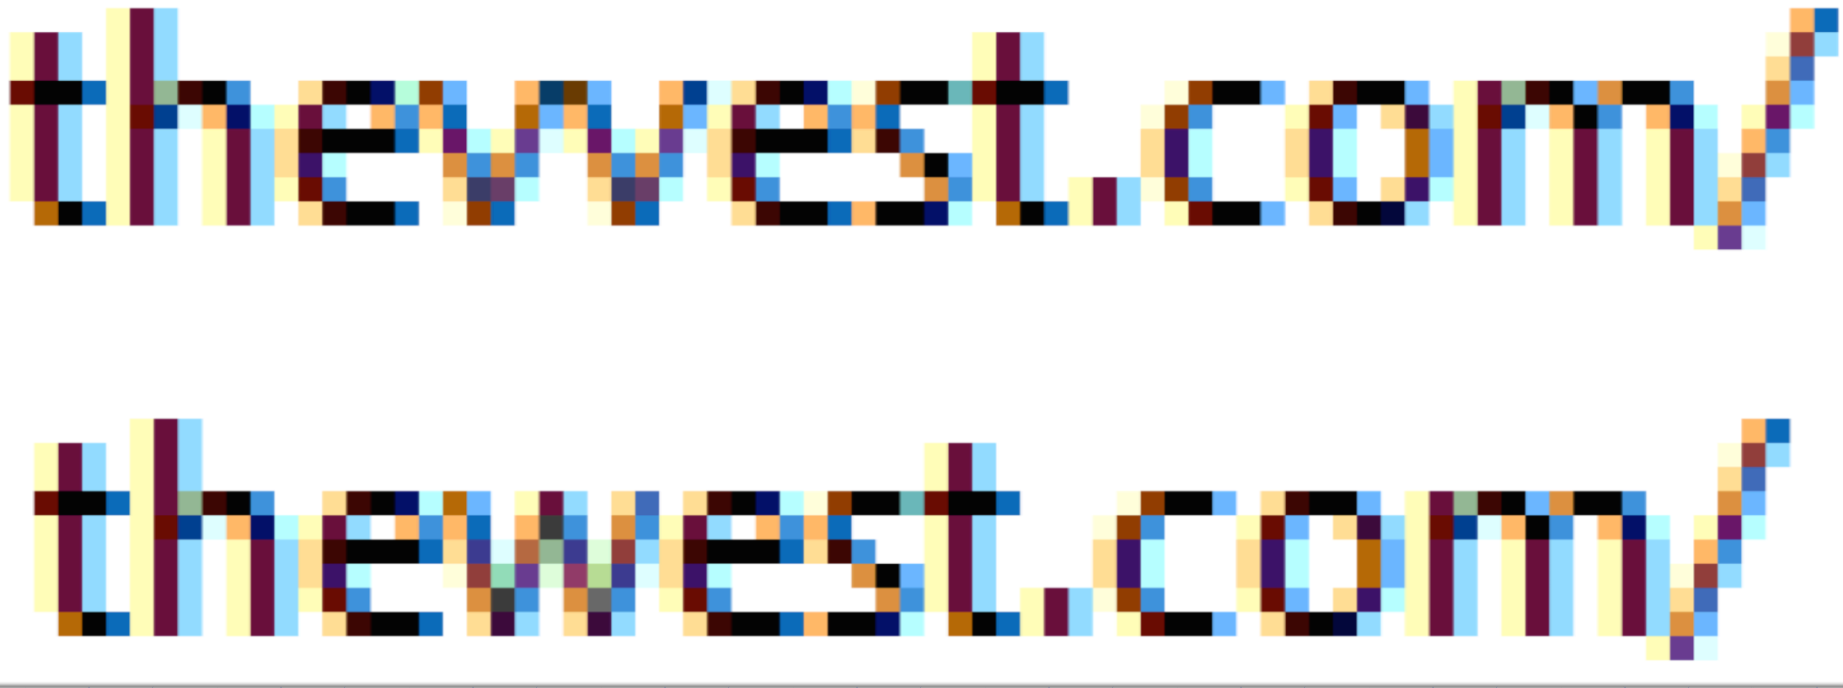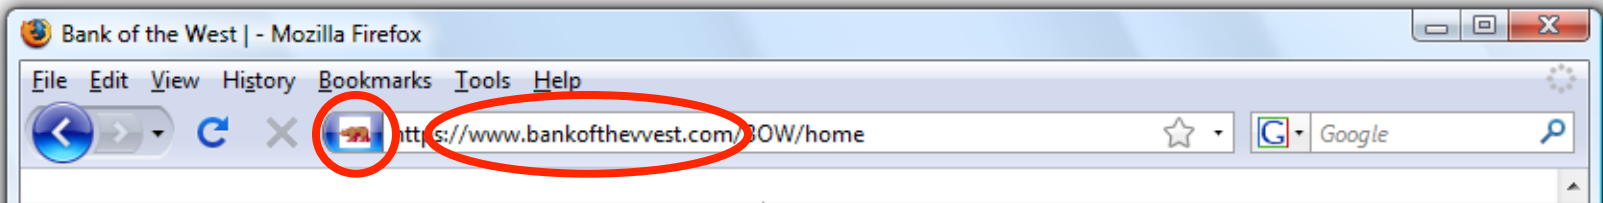


Safe to type your password?

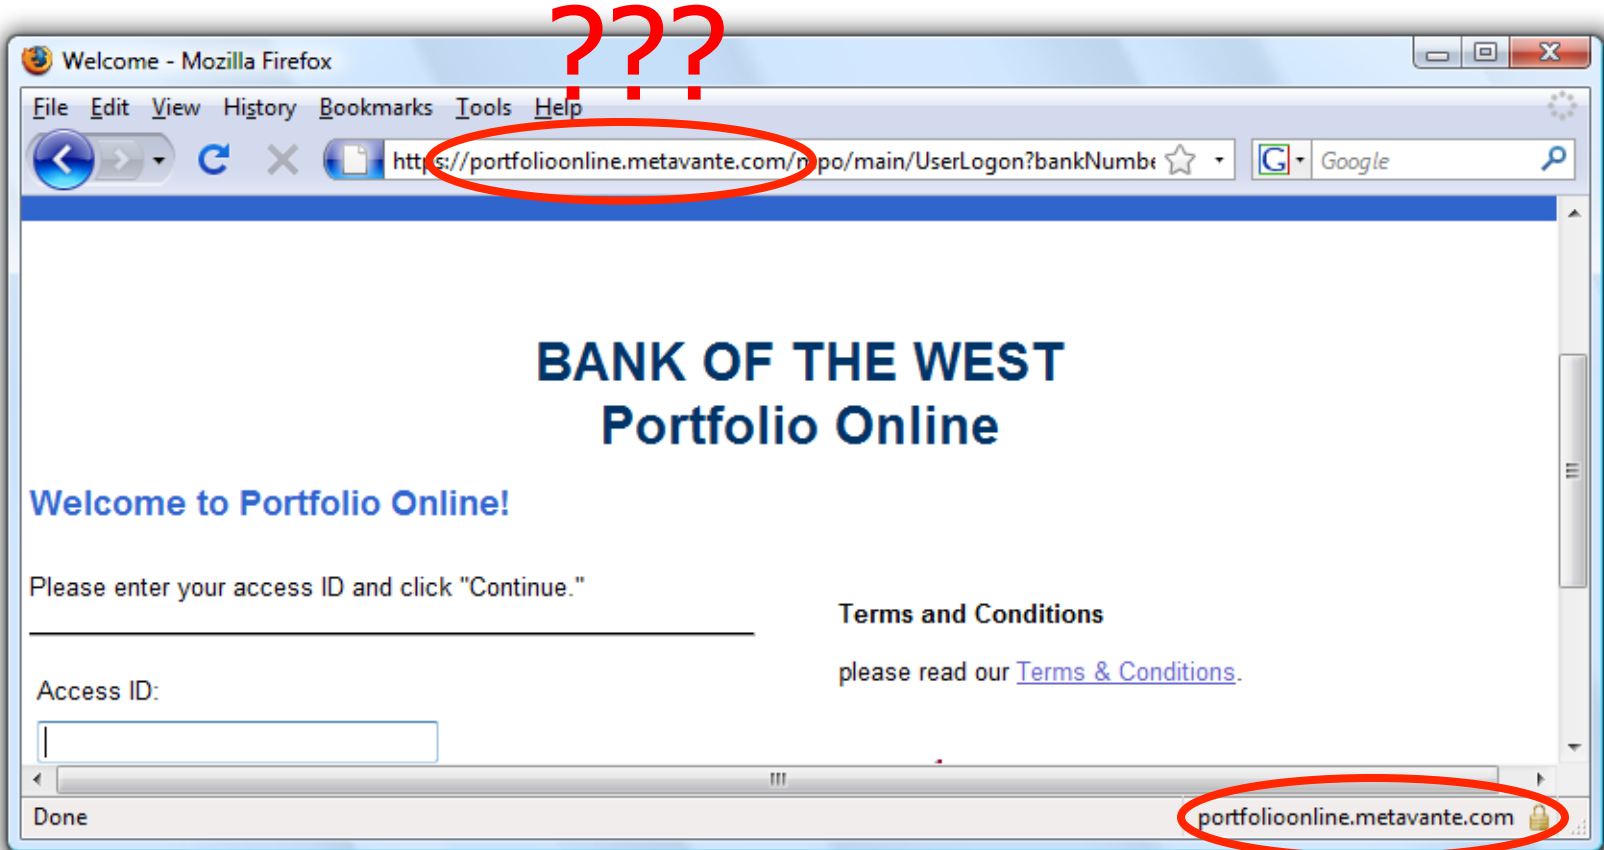

???

Safe to type your password?

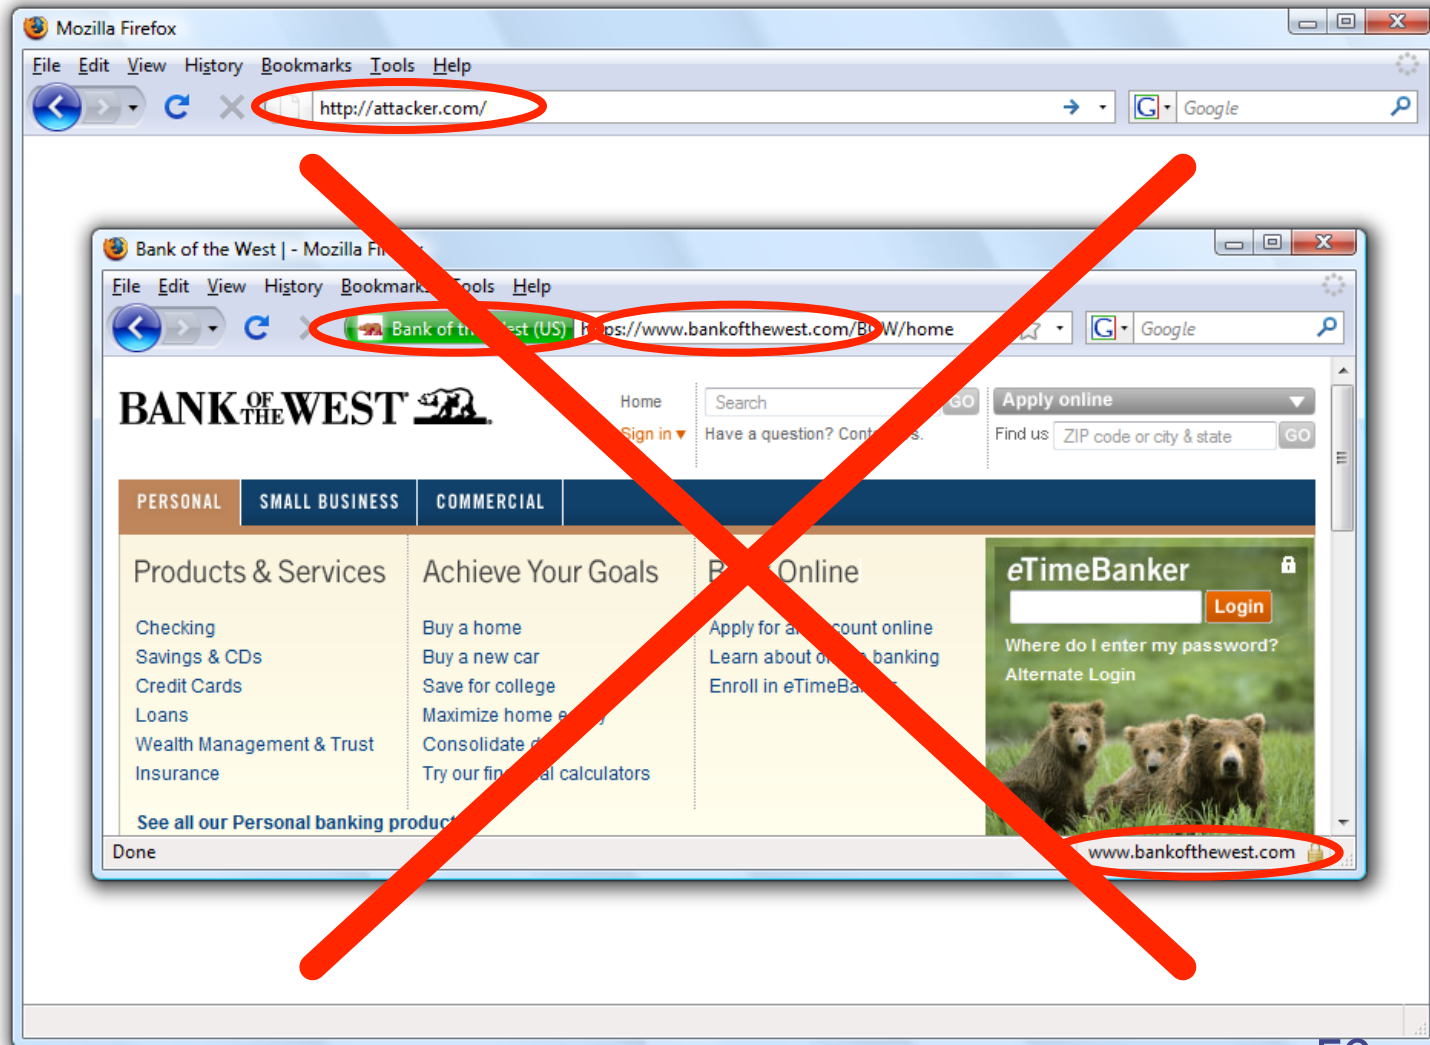

Mixed Content: HTTP and HTTPS

◆ Problem

- Page loads over HTTPS, but has HTTP content
- Network attacker can control page

◆ IE: displays mixed-content dialog to user

- Flash files over HTTP loaded with no warning (!)
- Note: Flash can script the embedding page

◆ Firefox: red slash over lock icon (no dialog)




- Flash files over HTTP do not trigger the slash

◆ Safari: does not detect mixed content

Dan will talk about this later...

Mixed Content: HTTP and HTTPS

silly dialogs

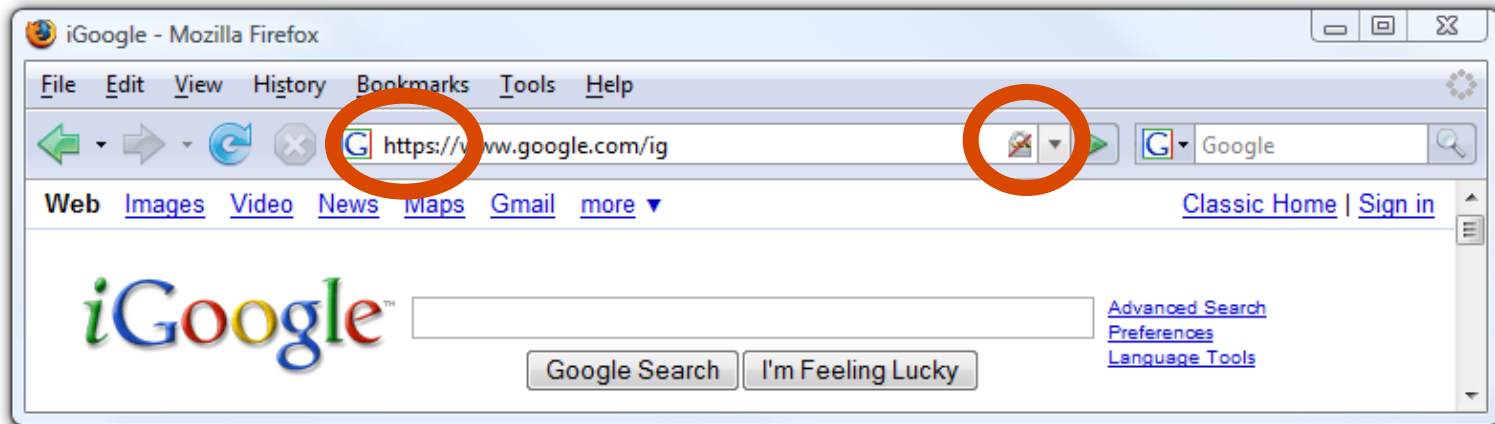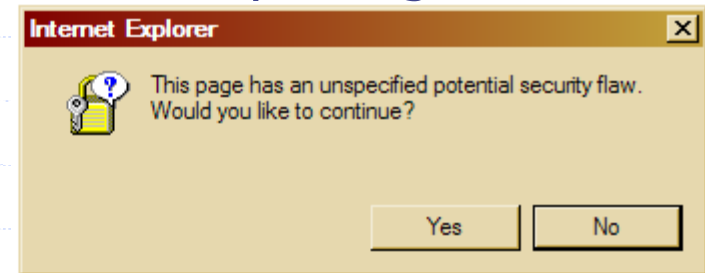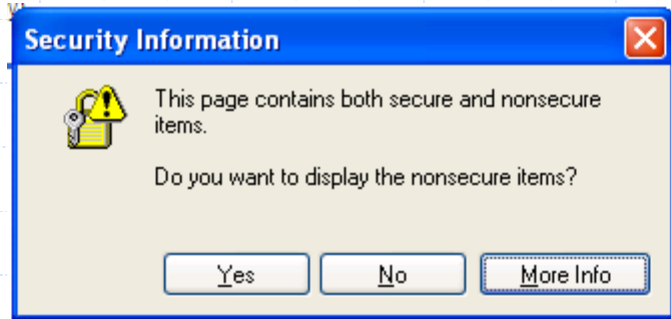

Mixed content and network attacks

◆ banks: after login all content over HTTPS

- Developer error: Somewhere on bank site write

```
<script src=http://www.site.com/script.js> </script>
```

- Active network attacker can now hijack any session



◆ Better way to include content:

```
<script src=//www.site.com/script.js> </script>
```

- served over the same protocol as embedding page


Lock Icon 2.0

◆ Extended validation (EV) certs

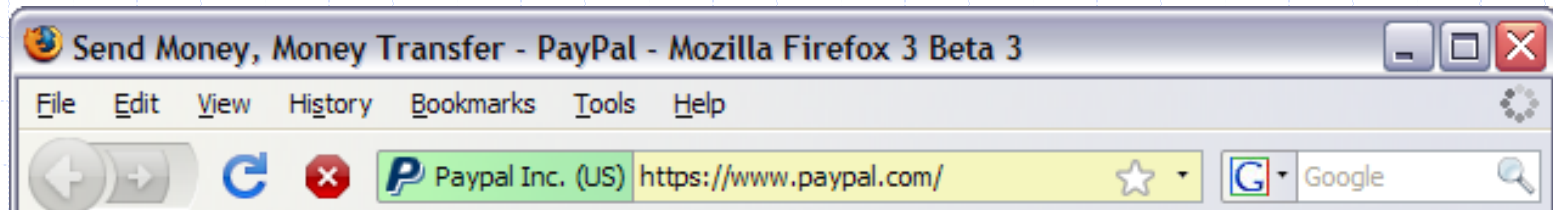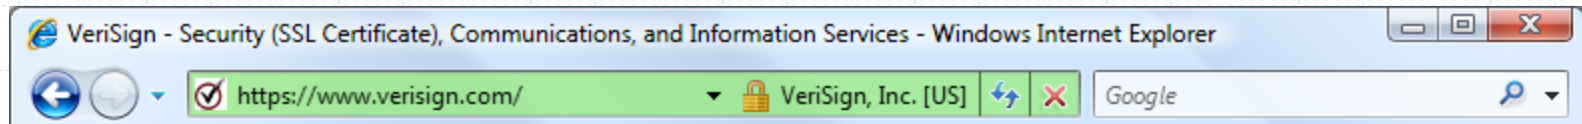

- Prominent security indicator for EV certificates
- note: EV site loading content from non-EV site does not trigger mixed content warning

Finally: the status Bar

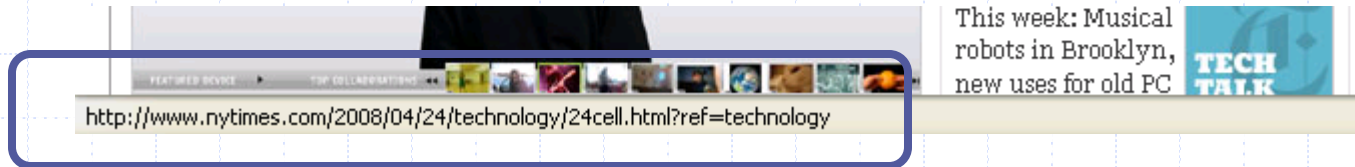

◆ Trivially spoofable



```
<a href="http://www.paypal.com/"  
    onclick="this.href = 'http://www.evil.com/';">  
    PayPal</a>
```




COOKIES: CLIENT STATE


Cookies

- ◆ Used to store state on user's machine

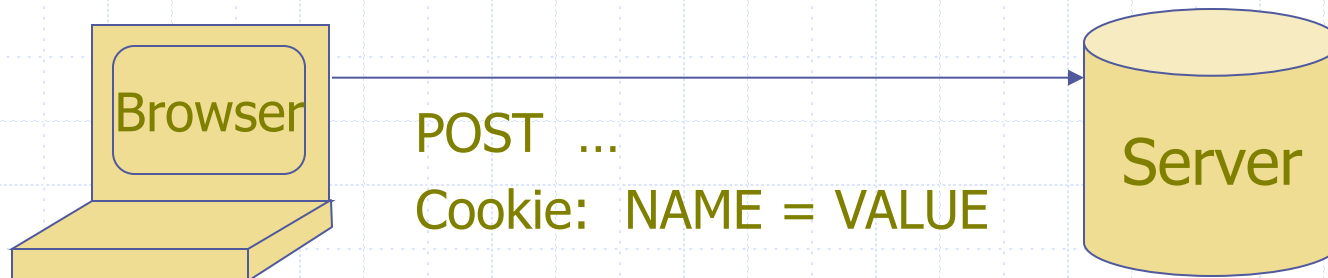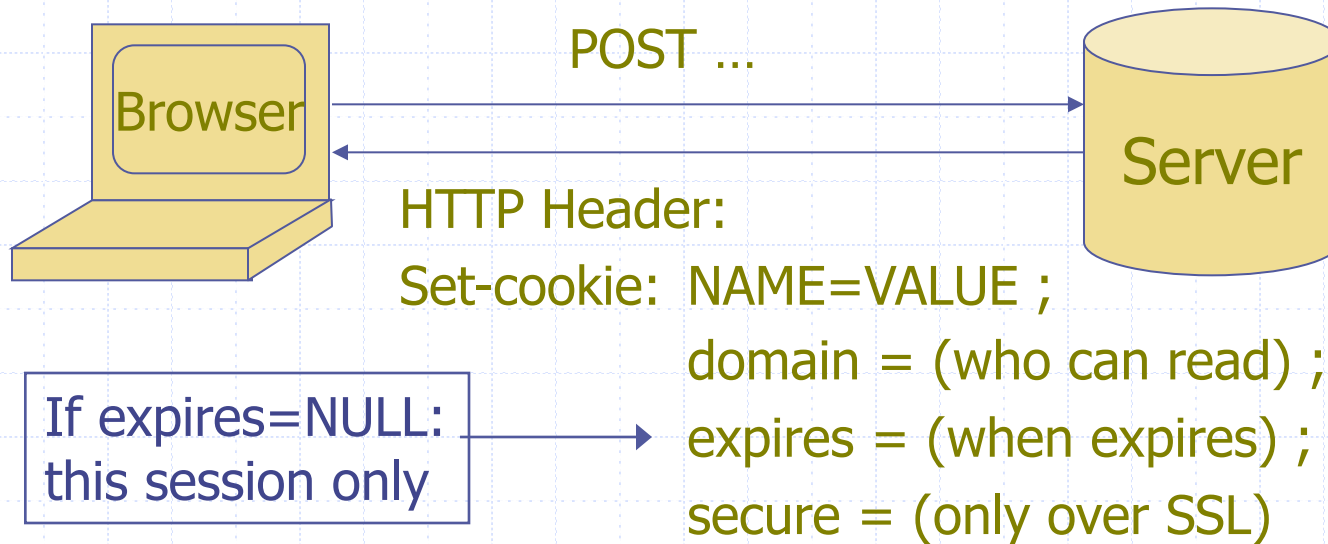

HTTP is stateless protocol; cookies add state

Cookie authentication

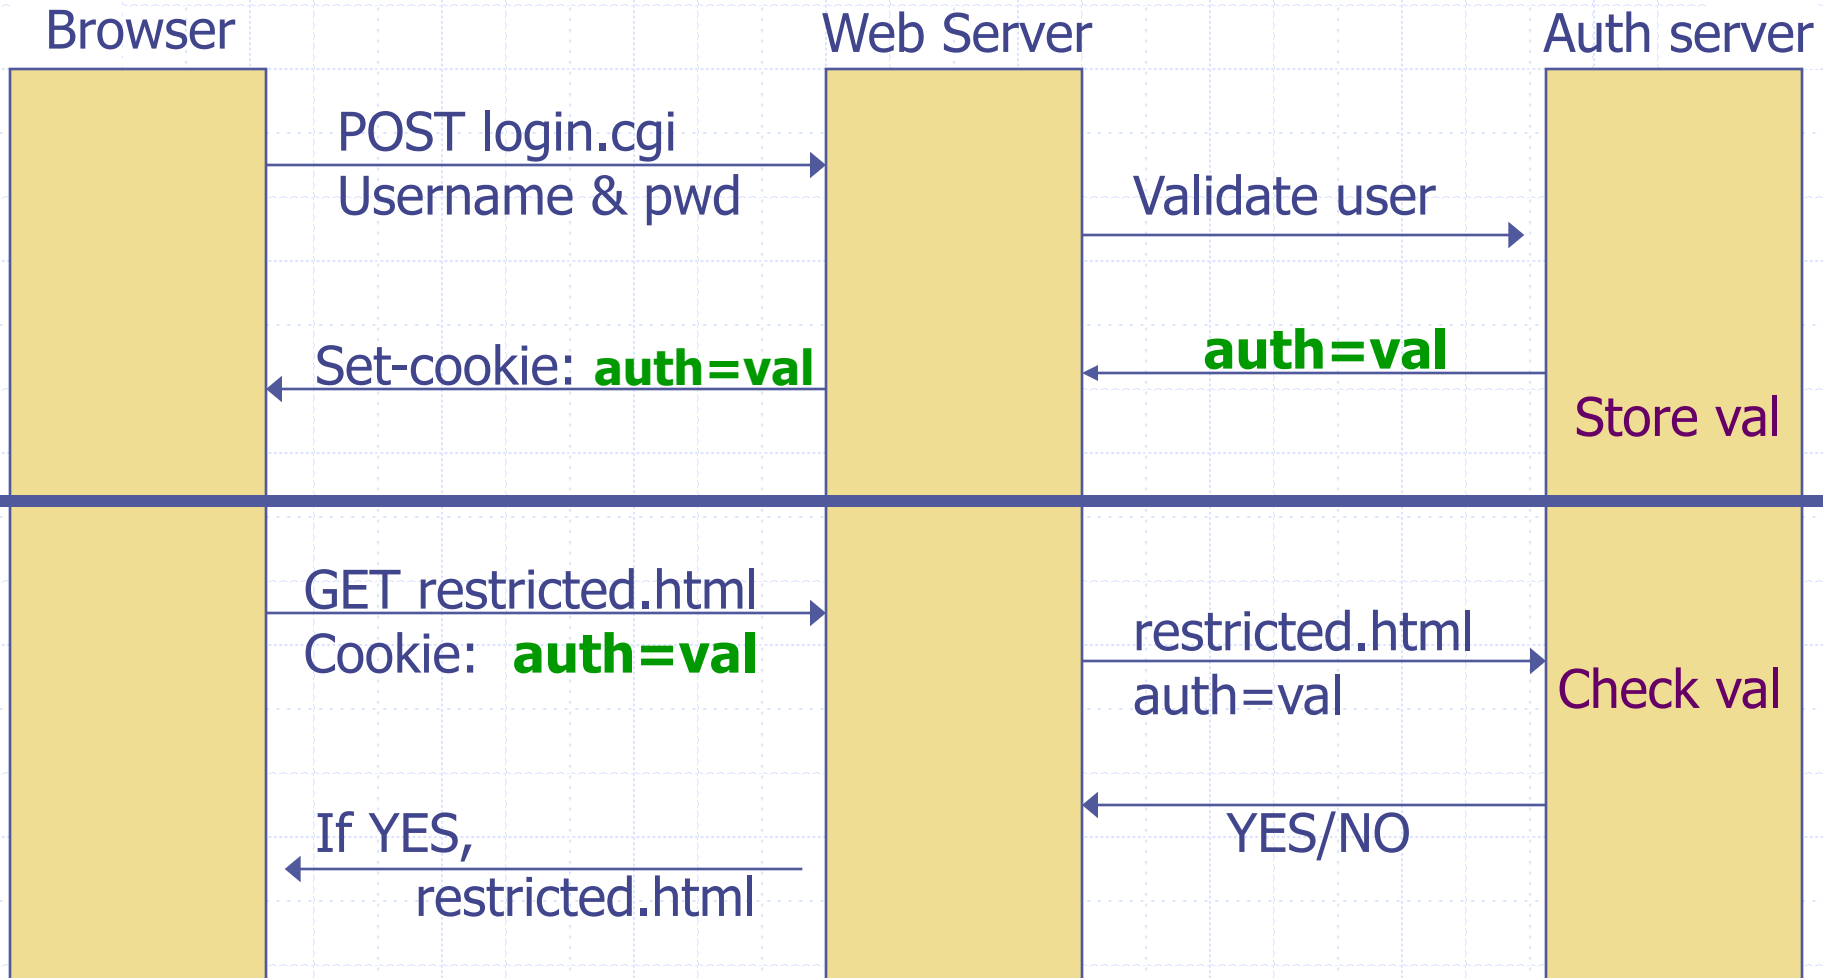

Cookie Security Policy

◆ Uses:

- User authentication
- Personalization
- User tracking: e.g. Doubleclick (3rd party cookies)


◆ Browser will store:

- At most 20 cookies/site, 3 KB / cookie

◆ Origin is the tuple **<domain, path>**


- Can set cookies valid across a domain suffix

Secure Cookies

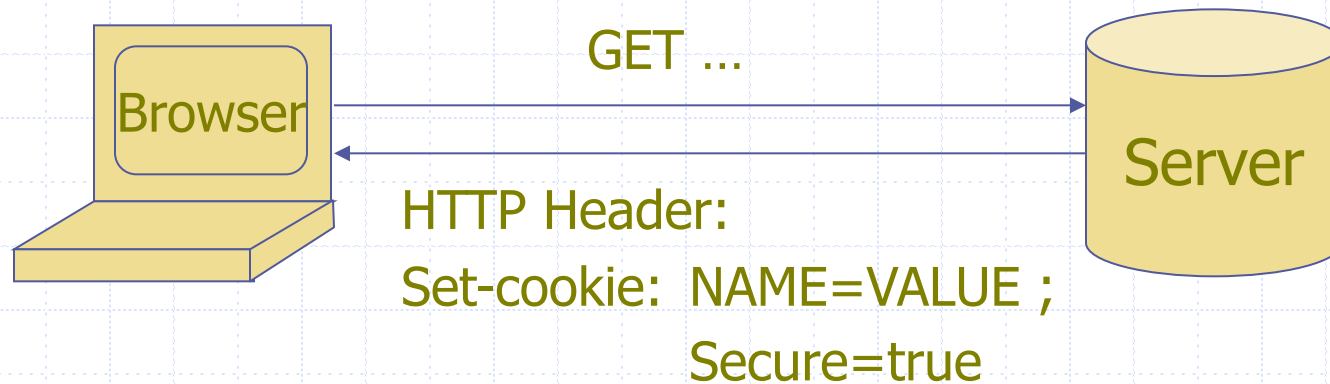

- Provides confidentiality against network attacker
 - Browser will only send cookie back over HTTPS
- ... but no integrity
 - Can rewrite secure cookies over HTTP
 - ⇒ network attacker can rewrite secure cookies
 - ⇒ can log user into attacker's account

httpOnly Cookies

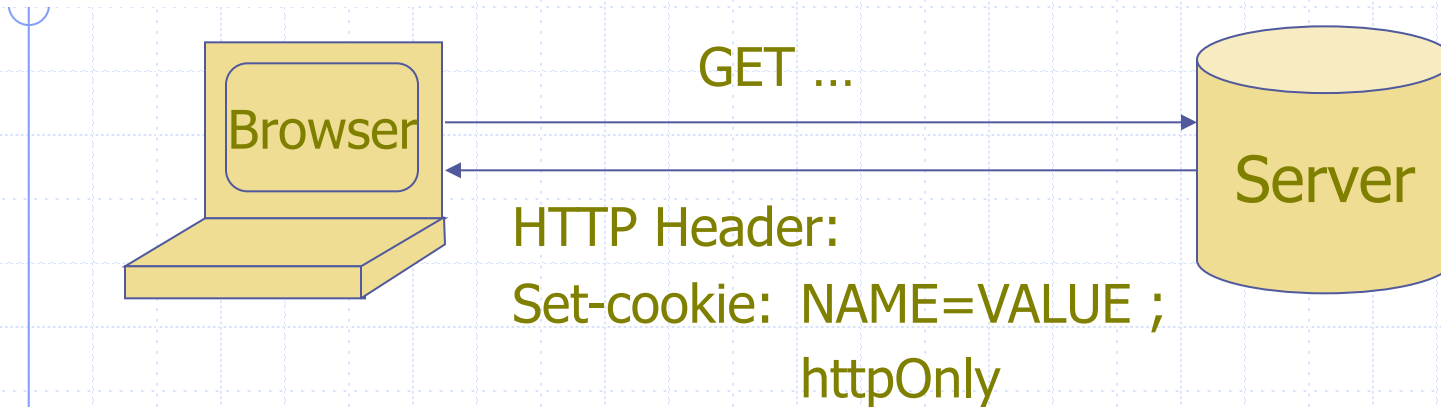

- Cookie sent over HTTP(s), but not accessible to scripts
 - cannot be read via `document.cookie`
 - Helps prevent cookie theft via XSS

... but does not stop most other risks of XSS bugs



FRAMES AND FRAME BUSTING

Frames

- ◆ Embed HTML documents in other documents

```
<iframe name="myframe"  
  src="http://www.google.com/">
```

This text is ignored by most browsers.

```
</iframe>
```



Frame Busting

- ◆ Goal: prevent web page from loading in a frame
 - example: opening login page in a frame will display correct passmark image

- ◆ Frame busting:

```
if (top !== self)
    top.location.href = location.href
```



Better Frame Busting

◆ Problem: **Javascript OnUnload event**

```
<body onUnload="javascript: cause_an_abort;">
```

◆ Try this instead:

```
if (top != self)
    top.location.href = location.href
else { ... code of page here ... }
```

Summary

- ◆ Http
- ◆ Rendering content
- ◆ Isolation
- ◆ Communication
- ◆ Navigation
- ◆ Security User Interface
- ◆ Cookies
- ◆ Frames and frame busting