

Scripting Languages

COMS W4115

Prof. Stephen A. Edwards
Spring 2003
Columbia University
Department of Computer Science

Scripting Languages

Higher-level languages.

More compact for small programs.

Often not suitable for large systems.

The more popular ones:

Awk

Perl

Python

Tcl

Bourne Shell

Simple Awk Program

Input file. Each line a record. Space-separated fields:
employee, pay rate, hours worked

```
Beth 10.0 0
Dan 9.75 0
Kathy 14.0 10
Mark 10.0 20
Susie 8.25 18
```

Run on the awk program

```
$3 > 0 { print $1, $2 * $3 }
```

produces

```
Kathy 140
Mark 200
Susie 148.5
```

Awk One-Liners

Print every line

```
{ print }
```

Print the first and third fields of each line

```
{ print $1, $3 }
```

Print every line with three fields


```
NF == 3 { print }
```

Print a line number before every line

```
{ print NR, $0 }
```

Simple Awk Program

```
Beth 10.0 0
Kathy 14.0 10
```

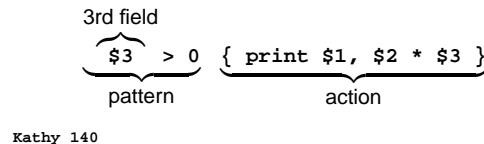

```
Kathy 140
```

Statistics in Awk

```
#!/bin/awk -f
BEGIN { n = 0; s = 0; ss = 0; }
NF == 1 { n++; s += $1; ss += $1 * $1; }
END {
    print n " data points"
    m = (s+0.0) / n; print m " average"
    sd = sqrt( (ss - n * m * m) / ( n - 1.0))
    print sd " standard deviation"
}
1
5
6 data points
6.16667 average
3.92003 standard deviation
Run on   10      gives
          3
          7
          11
```

Awk

Named for its three developers:

Alfred Aho

Peter Weinberger

Brian Kernighan

Good for data file manipulation. I use it for computing grades and other simple tasks.

Awk Program Structure

pattern { action }

pattern { action }

:

awk scans an input file one line at a time and, in order, runs each action whose pattern matches.

Patterns:

`BEGIN, END`

`expression`

`/regular expression/`

`pattern && pattern`

`pattern || pattern`

`! pattern`

True before and after the file.

Condition

String pattern match

Boolean operators

Associative Arrays: Word Counter

```
{ gsub(/[,.;!(){}]/, "") # remove punctuation
  for ( i = 1 ; i <= NF ; i++ )
    count[$i]++
}
END { for (w in count)
    print count[w], w | "sort -rn"
}
```

Run on the Tiger reference manual produces

```
103 the
58 of
51 is
49 and
49 a
35 expression
32 The
29 =
```

Perl

Larry Wall's

Practical Extraction and Report Language
or
Pathologically Eclectic Rubbish Lister

Larger, more flexible language than Awk. Good for text processing and other tasks. Strange semantics. Heinous syntax.

Excellent regular-expression support. More complicated data structures possible (even classes).

"There's more than one way to do it"

Perhaps too many. Equivalent ways to print STDIN:

```
while (<STDIN>) { print; }
print while <STDIN>
while (defined($_ = <STDIN>)) { print $_; }
for (;<STDIN>;) { print; }
print $_ while defined($_ = <STDIN>);
```

Many Perl statements come in prefix and postfix form

```
while (...) ...
... while ...
if (...) ...
... if ...
... unless ...
```

Wordcount in Perl

```
#!/usr/bin/perl
while(<>) {
    chop;
    s/.,;:!(){}]///g;
    @words = split;
    foreach $word (@words) {
        $count{$word}++;
    }
}
open(SORTER, "| sort -nr");
foreach $word (keys %count) {
    print SORTER
        $count{$word}, " ", $word, "\n";
}
```

So Why Perl?

Perhaps the most popular scripting language.

Despite its flaws, it's very powerful.

Almost has a good type system.

Very few things *can't* be done in Perl.

Fast, flexible interpreter.

Ability to make virtually every Unix system call. Binary data manipulation.

Ported everywhere.

Very, very extensive collection of libraries. Database access. CGI/HTML for the web. Math. IPC. Time.

Wordcount in Python

```
#!/usr/bin/env python

import fileinput, re, string, os

count = {}
for line in fileinput.input():
    line = re.sub(r'.,;:!(){}]', "", line)
    for word in string.split(line):
        if not count.has_key(word):
            count[word] = 1
        else:
            count[word] = count[word] + 1

f = os.popen("sort -nr",'w')
for word in count.keys():
    f.write('%d %s\n' % (count[word], word) )
```

Python Classes

```
class Complex:
    def __init__(self, realpart, imagpart):
        self.r = realpart
        self.i = imagpart

    def add(self, a):
        self.r = self.r + a.r
        self.i = self.i + a.i

    def p(self):
        print "%g + %gi" % (self.r, self.i)

x = Complex(1,2)
y = Complex(2,3)
x.p()
x.add(y)
x.p()

Prints

1 + 2i
3 + 5i
```

Understandable wordcount in Perl

```
#!/usr/bin/perl
while($line = <>) {
    chop($line);
    $line =~ s/.,;:!(){}]///g;
    @words = split(/s+/, $line);
    foreach $word (@words) {
        $count{$word}++;
    }
}
open(SORTER, "| sort -nr");
foreach $word (keys %count) {
    print SORTER
        $count{$word}, " ", $word, "\n";
}
```

Python

Perl designed by a sane man.

Very clean syntax and semantics.

Large collection of libraries (but not as big as Perl's).

Regular expression support (but not as integrated as Perl's.)

Python's Merits

Good support for programming-in-the-large:

Packages with separate namespaces; Exceptions;
Classes

Persistent datastructures (pickling)

High-level: lists, strings, associative arrays, iterators

Good collection of libraries:

Operating-system access (files, directories, etc.);
String manipulation; Curses; Databases; Networking
(CGI, HTTP, URL, mail/Mime, HTML); Tk;
Cryptography; System-specific (Windows, Mac, SGI,
POSIX)

Python vs. Perl

Python can be the more verbose language, but Perl can be cryptic.

Regular expression support more integrated with language in Perl.

Perl better-known.

Probably comparable execution speeds.

More "tricks" possible in Perl; Python more disciplined.

Python has the much cleaner syntax and semantics; I know which language's programs I'd rather maintain.


Wordcount in Tcl

```
#!/usr/bin/env tclsh

while {[gets stdin line] >= 0} {
    regsub -all {[.,:;!{}]} $line "" line
    foreach word $line {
        if {![info exists count($word)]} {
            set count($word) 1
        } else {
            incr count($word)
        }
    }
}

set f [open "| sort -rn" w]
foreach word [array names count] {
    puts $f "$count($word) $word"
}
}
```

An Editable Graph

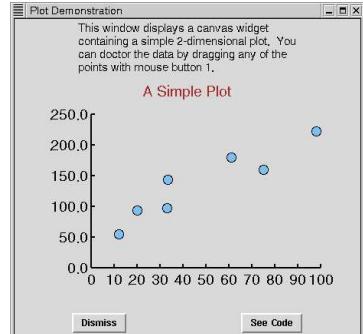

Nifty Tcl Features

Associative arrays

```
set count(Stephen) 1
```

Lists

```
lappend foo 1
lappend foo 2
foreach i $foo { puts $i } ; # print 1 then 2
```

Procedures

```
proc sum3 {a b c} {
    return [expr $a + $b + $c]
}
```

An Editable Graph

```
# Set up the main window
set w .plot
catch destroy $w
toplevel $w
wm title $w "Plot Demonstration"
wm iconname $w "Plot"
positionWindow $w
set c $w.c

# Text description at top
label $w.msg -font $font -wraplength 4i -justify left \
    -text "This window displays a canvas widget containing \
    a simple 2-dimensional plot. You can doctor the data \
    by dragging any of the points with mouse button 1."
pack $w.msg -side top

# Draw axes
set plotFont Helvetica 18
$c create line 100 250 400 250 -width 2
$c create line 100 250 100 50 -width 2
$c create text 225 20 -text "A Simple Plot" -font $plotFont \
    -fill brown
```

Tcl

John Ousterhout's Tool Command Language was originally intended to be grafted on to an application to make it controllable.

Since become a general-purpose scripting language. Its syntax is quite simple, although rather atypical for a programming language.

Tk, a Tcl package, provide graphical user interface widgets. Tcl/Tk may be the easiest way to write a GUI.

Tk has been connected to Perl and Python as well.

Tcl Syntax

Shell-like command syntax:

command argument argument ...

All data is strings (incl. numbers and lists)

Macro-like variable substitution:

```
set foo "123 abc"
bar 1 $foo 3
```

Command substitution:

```
set foo 1
set bar 2
puts [eval $foo + $bar]; # Print 3
```

Tk

"Hello World" in Tk.

```
button .b -text "Hello World" -command "exit"
pack .b
```



An Editable Graph

```
# Set up bottom control buttons
frame $w.buttons
pack $w.buttons -side bottom -fill x -pady 2m
button $w.buttons.dismiss -text Dismis -command "destroy $w"
button $w.buttons.code -text "See Code" -command "showCode $w"
pack $w.buttons.dismiss $w.buttons.code -side left -expand 1

# Set up graph itself
$c create line 100 250 400 250 -width 2
$c create line 100 250 100 50 -width 2
$c create text 225 20 -text "A Simple Plot" -font $plotFont \
    -fill brown
```

An Editable Graph

```
# Draw axis labels
for {set i 0} {$i <= 10} {incr i} {
    set x [expr {100 + ($i*30)}]
    $c create line $x 250 $x 245 -width 2
    $c create text $x 254 -text [expr 10*$i] \
        -anchor n -font $plotFont
}
for {set i 0} {$i <= 5} {incr i} {
    set y [expr {250 - ($i*40)}]
    $c create line 100 $y 105 $y -width 2
    $c create text 96 $y -text [expr $i*50].0 \
        -anchor e -font $plotFont
}
# Draw points
foreach point {{12 56} {20 94} {33 98} {32 120} {61 180} \
    {75 160} {98 223}} {
    set x [expr {100 + (3*[lindex $point 0])}]
    set y [expr {250 - (4*[lindex $point 1])/5}]
    set item [$c create oval [expr $x-6] [expr $y-6] \
        [expr $x+6] [expr $y+6] -width 1 -outline black \
        -fill SkyBlue2]
    $c addtag point withtag $item
}
```

cc in sh

```
#!/bin/sh

# Set up command names
root=/usr/lib
cpp=$root/cpp
ccl=$root/ccl
as=/usr/bin/as
ld=/usr/bin/ld

# Complaint function
usage() {
    echo "usage: $0 [options] files ..." 1>&2
    exit 1
}

# Default output filename
outfile="a.out"
```

cc in sh

```
# Preprocess and compile to assembly
for file in $cfiles; do
    asmfile='echo $file | sed s/.c/.s/'
    $cpp $file | $ccl > $asmfile
    $files="$files $asmfile"
done
if [ "$stopaftercompile" ]; then exit 0; fi

# Assemble object files
for file in $sfiles; do
    objfile='echo $file | sed s/.s$/o/'
    $as -o $objfile $file
    $files="$files $objfile"
done
if [ "$stopafterassemble" ]; then exit 0; fi

# Link to build executable
$ld -o $outfile $files
exit 0
```

An Editable Graph

```
# Bind actions to events
$c bind point <Any-Enter> "$c itemconfig current -fill red"
$c bind point <Any-Leave> "$c itemconfig current -fill SkyBlue2"
$c bind point <1> "plotDown $c %x %y"
$c bind point <buttonRelease-1> "$c dtag selected"
bind $c <B1-Motion> "plotMove $c %x %y"

set plot(lastX) 0
set plot(lastY) 0
proc plotDown {w x y} { # Called when point clicked
    global plot
    $w dtag selected
    $w addtag selected withtag current
    $w raise current
    set plot(lastX) $x
    set plot(lastY) $y
}
proc plotMove {w x y} { # Called when point dragged
    global plot
    $w move selected [expr $x-$plot(lastX)] \
        [expr $y-$plot(lastY)]
    set plot(lastX) $x
    set plot(lastY) $y
}
```

cc in sh

```
# Parse command-line options
while [ ! -z "$1" ];
do case x"$1" in
    x-v) echo "Stephen's cc 1.0"; exit 0 ;;
    x-o) shift; outfile=$1 ;;
    x-c) stopafterassemble=1 ;;
    x-S) stopaftercompile=1 ;;
    x-E) stopafterpreprocess=1 ;;
    x-*) echo "Unknown option $1" 1>&2; usage ;;
    *) break ;;
esac
shift
done

# Initialize lists of files to process
cfiles=""
sfiles=""
ofiles="crt1.o"

if [ $# = 0 ]; then
    echo "$0: No input files" 1>&2; exit 1
fi
```

Scripting Languages Compared

	awk	Perl	Python	Tcl	sh
Shell-like	N	N	N	Y	Y
Reg. Exp.	B	A	C	C	D
Types	C	B	A	B	D
Structure	C	B	A	B	C
Syntax	B	F	A	B	C
Semantics	A	C	A	B	B
Speed	B	A	A	B	C
Libraries	C	A	A	B	C
Power	B	A	A	B	C
Verbosity	B	A	C	C	B

Bourne Shell

Default shell on most Unix systems (sh or bash).

Good for writing “shell scripts:” parsing command-line arguments, invoking and controlling other commands, etc.

Example: The cc command.

Most C compilers built from four pieces:

- Preprocessor (cpp)
- Actual compiler (cc1)
- Assembler (as)
- Linker (ld)

cc in sh

```
# Parse filenames
while [ ! -z "$1" ]; do
    case x"$1" in
        x*.c) cfiles="$cfiles $1" ;;
        x*.s) sfiles="$sfiles $1" ;;
        x*.o | x*.a) ofiles="$ofiles $1" ;;
        *) echo "Unrecognized file type $1" 1>&2; exit 1 ;;
    esac
    shift
done

# Run preprocessor standalone
if [ "$stopafterpreprocess" ]; then
    for file in $cfiles; do
        $cpp $file
    done
    exit 0
fi
```

What To Use When

awk: Best for simple text-processing (file of fields)

Perl: Best for legacy things, things requiring regexps

Python: Best all-around, especially for large programs

Tcl: Best for command languages, GUIs

sh: Best for portable “invoking” scripts